

**Full-Scale Up-Flo[®] Filter
Field Performance Verification Tests**

by

Robert Pitt and Yezhao Cai

Department of Civil, Construction, and Environmental Engineering
The University of Alabama
Tuscaloosa, AL 35487

for

Hydro International, plc.
Portland, ME

December 26, 2013

CONTENTS

Introduction and Summary	5
Monitoring Location	7
Monitoring Methodology	12
Solids Performance Comparison during Actual Storm Monitoring and Controlled Sediment Tests	16
Sum-of-Loads and Mass Balance Evaluations	29
Appendix A.1: Regression and ANOVA Performance Comparison for SSC.....	36
Appendix A.2: Regression and ANOVA Performance Comparison for 0.45-3 μm Solids	40
Appendix A.3: Regression and ANOVA Performance Comparison for 3-12 μm Solids	44
Appendix A.4: Regression and ANOVA Performance Comparison for 12-30 μm Solids	48
Appendix A.5: Regression and ANOVA Performance Comparison for 30-60 μm Solids	52
Appendix A.6: Regression and ANOVA Performance Comparison for 60-120 μm Solids	56
Appendix A.7: Regression and ANOVA Performance Comparison for 250-1180 μm Solids	60
Appendix B.1: Summary of Regression, ANOVA and Hypothesis Analyses.....	60
for Sum-of-Load SSC	60
Appendix B.2: Summary of Regression, ANOVA and Hypothesis Analyses.....	63
for Sum-of-Load 0.45-3 μm Solids	63
Appendix B.3: Summary of Regression, ANOVA and Hypothesis Analyses.....	65
for Sum-of-Load 3-12 μm Solids	65
Appendix B.4: Summary of Regression, ANOVA and Hypothesis Analyses.....	67
for Sum-of-Load 12-30 μm Solids	67

Appendix B.5: Summary of Regression, ANOVA and Hypothesis Analyses.....	69
for Sum-of-Load 30-60 μm Solids	69
Appendix B.6: Summary of Regression, ANOVA and Hypothesis Analyses.....	71
for Sum-of-Load 60-120 μm Solids	71
Appendix B.7: Summary of Regression, ANOVA and Hypothesis Analyses.....	73
for Sum-of-Load 120-250 μm Solids	73
Appendix B.8: Summary of Regression, ANOVA and Hypothesis Analyses.....	74
for Sum-of-Load 250-1180 μm Solids	74
Appendix B.9: Summary of Regression, ANOVA and Hypothesis Analyses.....	76
for Sum-of-Load >1180 μm Solids	76
Appendix C: August 13, 2012 Storm Event Summary.....	78
Appendix D.1: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Nitrogen (50 Sampled Storms).....	88
Appendix D.2: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Nitrogen (50 Sampled Storms)	91
Appendix D.3: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Nitrogen (50 Sampled Storms)	94
Appendix D.4: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Phosphorus (50 Sampled Storms).....	97
Appendix D.5: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Phosphorus (50 Sampled Storms)	100
Appendix D.6: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Copper (50 Sampled Storms)	103
Appendix D.7: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Copper (50 Sampled Storms)	106
Appendix D.8: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Zinc (50 Sampled Storms)	109
Appendix D.9: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Zinc (50 Sampled Storms).....	112

Appendix D.10: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for *E. Coli* (50 Sampled Storms) 115

Appendix D.11: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Enterococci (50 Sampled Storms) 118

Introduction and Summary

Field performance verification tests under actual storms were monitored using Hydro International's full-scale Up-Flo[®] filter by researchers from the Department of Civil, Construction, and Environmental Engineering at the University of Alabama from July 2010 to March 2013. The tests were conducted at the Riverwalk parking lot near Bama Belle in Tuscaloosa, Alabama. The Up-Flo[®] filter was installed by personnel from the City of Tuscaloosa in early 2009. The filter was a standard six module unit containing the standard CPZ Mix[™] with the addition of 5% iron fillings (for the last series of full-scale tests; the first series of full-scale tests did not contain the iron). The first series of full-scale tests were conducted by Dr. Noboru Togawa as part of his dissertation research (*Development and Testing of Protocols for Evaluating Emerging Technologies for the Treatment of Stormwater*, 2011, available at: http://unix.eng.ua.edu/~rpitt/Publications/11_Theses_and_Dissertations/UpFlo_Filter_Dissertation_Noboru_Togawa_Final.pdf) while the final set of full-scale tests were conducted by Yezhao Cai as part of his thesis research (Full-Scale Up-Flo[®] Stormwater Filter Field Performance Verification Tests, June 2013, available at: http://unix.eng.ua.edu/~rpitt/Publications/11_Theses_and_Dissertations/Cai_thesis.pdf). These two extensive reports contain much information concerning the testing protocols and detailed data analyses and should be examined for further information.

A number of different tests were conducted with the full-scale Up-Flo[®] filter, starting with preliminary controlled quality assurance/quality control tests including:

- Hydraulic flow tests (using pumped river water) to calibrate the flow monitoring equipment and to test the filter behavior of installed filter media bags under different simulated influent flow loadings.
- Ground silica (Sil-Co-Sil) and fine sand mixture performance tests under pumped water tests to measure performance of the Up-Flo[®] filter under different flows, particle sizes, and sediment concentration conditions.

After these preliminary controlled QA/QC field tests, continuous hydraulic and water quality performance monitoring was conducted during actual storm events. Earlier laboratory and pilot-scale tests were also conducted during the development of the Up-Flo[®] filter. Reviews and summaries of these early tests are included in the above referenced dissertation and thesis.

The water quality performance evaluation focused on the removal capability of the Up-Flo[®] filter over a wide range of particle sizes, influent pollutant concentrations, and rain conditions. The performance data obtained under actual rainfall conditions were compared to the controlled QA/QC tests that used mixed ground silica and fine sands having known specific gravity and concentrations. In addition, sump sediments were also sampled and analyzed at the end of the monitoring period for mass balance calculations, and for adjustments of automatic sampler performance data for the large particle sizes.

Field performance testing of the full-scale Up-Flo[®] Filter during actual storms was initially conducted by Togawa (2011) who examined 20 storm events during his dissertation research during an approximate one-year period. An additional 30 storm events were sampled and monitored at the

same test site with the same test methodology as part of Cai's thesis (2013). Overall, a total of 50 events have been evaluated to describe the performance of the Up-Flo® Filter under a wide range of rainfall and runoff conditions, resulting in increased confidence of the performance observations.

Tables 1 and 2 show the overall water quality performance of the full-scale Up-Flo® Filter for these sampled storm events monitored at the Bama Belle test site. All solids constituents, including each particle size range, had significant reductions with Wilcoxon Signed Rank p-values of <0.001 and high levels of flow-weighted reductions for TSS and SSC. Average effluent TSS and SSC concentrations were 22 and 26 mg/L, respectively. Table 1 shows the overall accumulative sum-of-loads performance associated with 41 sampled events for each particle size. These data are shown for 41 events as several influent samples were influenced by local erosion areas that adversely affected the influent sediment measurements, resulting in very large concentrations. These events were therefore eliminated from this performance summary. The total influent measured particulate loading for these 41 events was 478 pounds (217 kg), while 93 pounds (42 kg) was the measured effluent particulate mass. The percentage solids captured for each specific particle range generally increased as the particle sizes increased, as expected, and the overall removal rate for the total particulates loading was about 80%, which was within the design goal of solids removal performance of the full-scale Up-Flo® filter.

Table 1. Accumulative Mass of Influent and Effluent Total Particulates by Particle Size Range for 41 Sampled Storms

Particle Size Range (um)	Influent Total Mass (With Sump*) (lbs)	Effluent Total Mass (lbs)	Percent Reduction
0.45 - 3	1.75	1.13	35.6
3 - 12	58.79	11.41	80.6
12 - 30	85.24	26.03	69.5
30 - 60	52.35	16.29	68.0
60 - 120	43.04	11.01	74.4
120 - 250	52.94	1.97	96.3
250 - 1180	120.54*	19.49	83.8
> 1180	63.28*	6.14	90.3
Total:	478*	93	80.4

* Without the sump mass corrections for the large particle sizes, the overall calculated performance would be much larger (>95% for SSC) due to likely biases in the influent autosampler from nearby erosion sources.

The removals for all nutrients also have significant reductions due to relatively large numbers of paired observations having detectable concentrations. The flow-weighted calculated levels of treatment for the nutrients were low to moderate, ranging from about 22% for dissolved phosphorus to about 34% for total nitrogen. The flow-weighted levels of control were all high for those heavy metal constituents having sufficient data, ranging from 62 to 72% for total copper, to greater than 85% for total chromium. The overall treatability for total and dissolved Cd, dissolved Cu, dissolved Pb

and dissolved Zn were not significant due to numerous non-detected influent concentration values, resulting in few paired data sets. The flow-weighted removals for *E. Coli* (46%) and Enterococci (56%) were also significant ($p < 0.001$).

Table 2. Summary of Water Quality Performance for 50 Sampled Storms

Constituent	Influent Average Conc., mg/L (COV)	Effluent Average Conc., mg/L (COV)	Flow-weighted (sum of loads) Percent Reduction	Wilcoxon Signed Rank P-value (Significant or Not)	MDL
Turbidity	26.8 (0.91)	10.0 (0.81)	58.4%	<0.001 (S)	0 NTU
TDS	76 (0.68)	54 (0.52)	31.8%	<0.001 (S)	1 mg/L
Total N as N	1.9 (0.74)	1.2 (0.63)	34.4%	<0.001 (S)	0.1 mg/L
Dissolved N as N	1.2 (0.69)	0.7 (0.63)	33.9%	<0.001 (S)	0.1 mg/L
Nitrate as N	0.48 (1.03)	0.34 (0.79 to 0.80)	27.9% to 28.0%	<0.001 (S)	0.02 mg/L
Total P as P	1.01 (0.56)	0.80 (0.62)	24.1%	<0.001 (S)	0.02 mg/L
Dissolved P as P	0.61 (0.67)	0.48 (0.70 to 0.71)	21.5% to 21.6%	<0.001 (S)	0.02 mg/L
Total Cd	0.048 (1.06)	0.005 (0.00)	91.9% to 100%	0.125 (N)	0.005 mg/L
Dissolved Cd	0.038 (0.89)	0.005 (0.00)	87.6% to 100%	0.250 (N)	0.005 mg/L
Total Cr	0.027 (1.06)	0.005 (0.00)	85.5% to 100%	<0.001 (S)	0.005 mg/L
Dissolved Cr	BDL (NA)	BDL (NA)	NA	NA	0.005 mg/L
Total Cu	0.033 (1.68)	0.013 (1.06)	62.6% to 72.9%	0.016 (S)	0.005 mg/L
Dissolved Cu	0.025 (1.04)	0.016 (0.94)	33.6% to 53.7%	0.125 (N)	0.005 mg/L
Total Pb	0.015 (0.98)	0.006 (0.42)	57.6% to 86.8%	0.002 (S)	0.005 mg/L
Dissolved Pb	0.006 (NA)	0.005 (NA)	16.7%	0.750 (N)	0.005 mg/L
Total Zn	0.087 (2.30)	0.022 (0.66)	71.7% to 74.5%	<0.001 (S)	0.005 mg/L
Dissolved Zn	0.058 (2.94)	0.009 (0.65)	82.3% to 85.2%	0.340 (N)	0.005 mg/L
<i>E. Coli</i>	6,064 (1.88)	3,432 (2.13)	46.1%	<0.001 (S)	<1
Enterococci	6,027 (1.08)	2,734 (1.79)	55.8%	<0.001 (S)	<1

Monitoring Location

The test site for the full-scale field monitoring was at the Bama Belle parking area adjacent to the Black Warrior River in Tuscaloosa, Alabama. The tested full-scale (6 modules) Up-Flo[®] Filter was installed in a city-owned catchbasin on January 8, 2009. Figure 1 and Table 3 show an aerial photograph and the surface cover details of the test site. Figure 2 includes some photographs taken at the test site. The total contributing drainage area is about 0.9 acres, and includes asphalt paved parking, concrete sidewalks, asphalt roadways, a small building, and landscaped park areas. The

impervious area, mainly consisting of asphalt pavement, was about 68% of the total drainage area. The Up-Flo® Filter receives and treats the runoff from these areas, and discharges the treated flow directly to the Black Warrior River through a 30 feet long pipe from the filter.

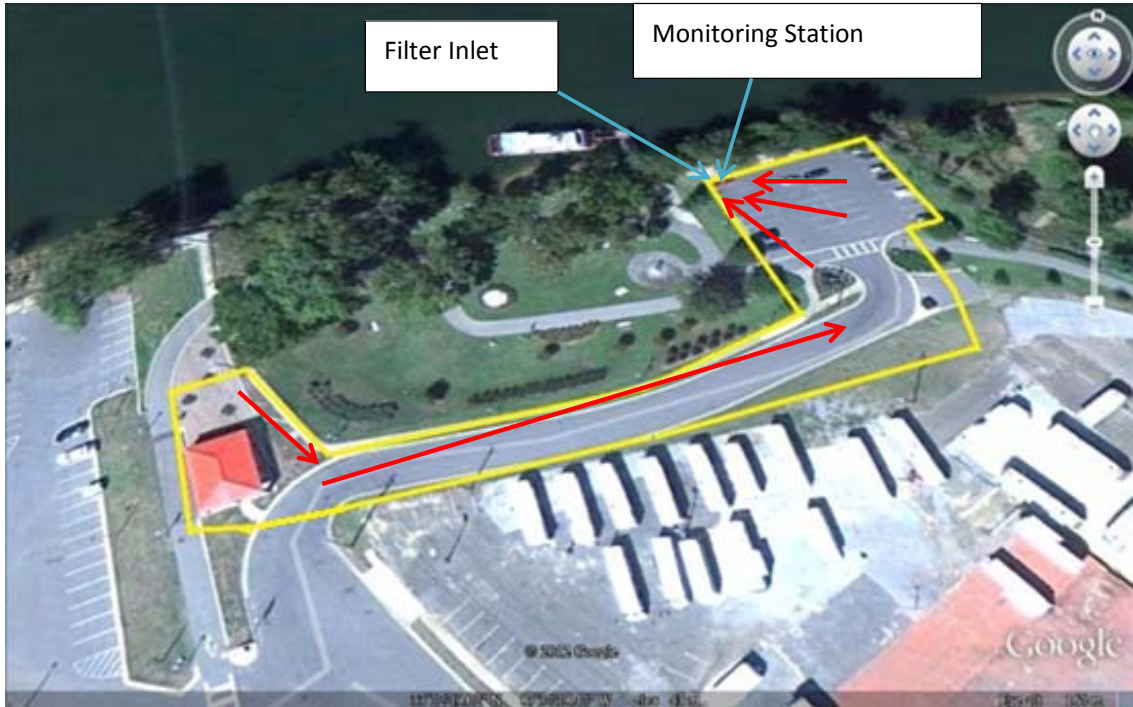


Figure 1: Aerial View of Bama Belle Test Site

Table 3: Flow Contributing Area at Bama Belle Test Site

Land Cover	Area (ft ²)	Area (acres)	Percentage of Drainage Area (%)
Landscaped park area	12,400	0.29	32
Asphalt parking	11,800	0.27	31
Asphalt entrance road	10,990	0.25	28
Concrete sidewalks	2,100	0.05	5.4
Small roof area	1,300	0.03	3.4
Total drainage area	38,610	0.89	100
Total impervious area	26,190	0.60	68
Total pervious area	12,400	0.29	32



Runoff enters filter inlet through roadside gutter and pavement sheetflow



Asphalt pavement with oil and grease stains



Only one building at the site with small roof area



Slight slope along the parking lot entrance road directs the runoff into the parking area and filter



Landscaped area with concrete walkway surrounding the parking area



Drainage area has a large fraction of impervious asphalt pavement



Eroding soils beside the roadway near the filter inlet due to fire ant activity



Fire ant hills besides the filter inlet increased the sediment load into the filter during some storms due to erosion

Figure 2: Bama Belle Test Site Photographs

The full-scale Up-Flo[®] Filter was installed within a commonly-sized 4-ft diameter catchbasin manhole at the Bama Belle test site. It incorporates a combination of treatment technologies including gravitational separation of settleable gross sediments, coarse screening of floatable materials, and upflow filtration through a treatment media mixture incorporating physical filtration along with ion exchange and sorption. Overall, much finer stormwater particulates can be removed compared to sedimentation processes alone at the design treatment flow rates. Each Up-Flo[®] Filter system can have up to seven filter modules in the 4 ft catchbasin manhole; the actual number is selected depending on the expected runoff rates needing to be treated. Each filter module has a design hydraulic treatment flow rate of about 25 gallons per minute (GPM). Large areas can contain several systems having many modules located in treatment vaults. The main advantages of the Up-Flo[®] Filter are that they are small and can be retrofitted in small areas, they have significantly decreased clogging problems compared to conventional downflow treatment devices, they have high treatment flow rates with reduced maintenance costs, and they have moderate to high pollutant removal rates.

Figure 3 is a schematic of the Up-Flo[®] Filter showing the major components of a typical six-module configuration, while Figure 4 is the cross-section of the filter module (shown as blue color in Figure 3) which contains the two CPZ[™] filter media bags (a combination of activated carbon, sphagnum peat moss, and manganese coated zeolite), distribution metal materials, and a restraining lid with a conveyance slot designed as the main outlet weir for the treated flow. During the last year of the full-scale tests, the media also contained 5% iron fillings.

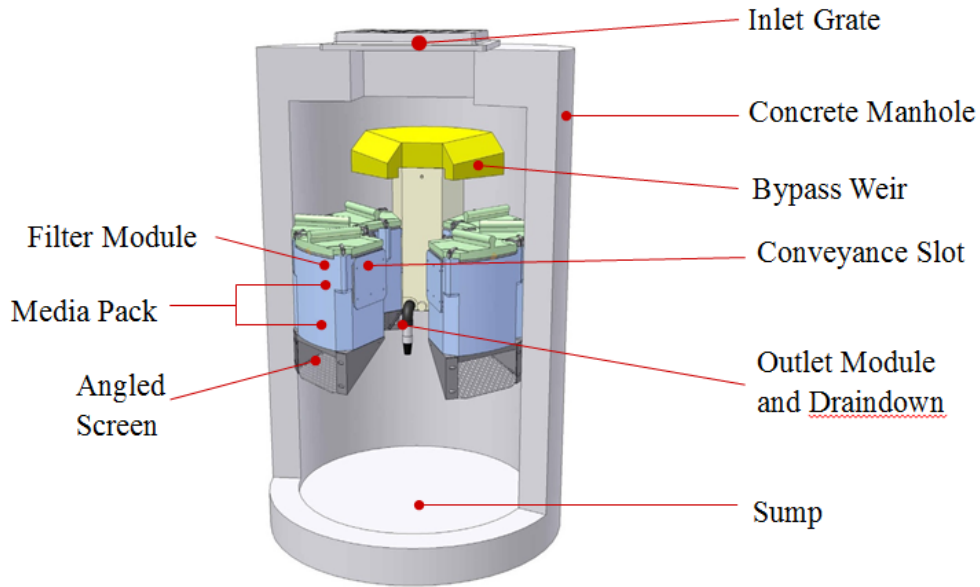


Figure 3: Up-Flo[®] Filter

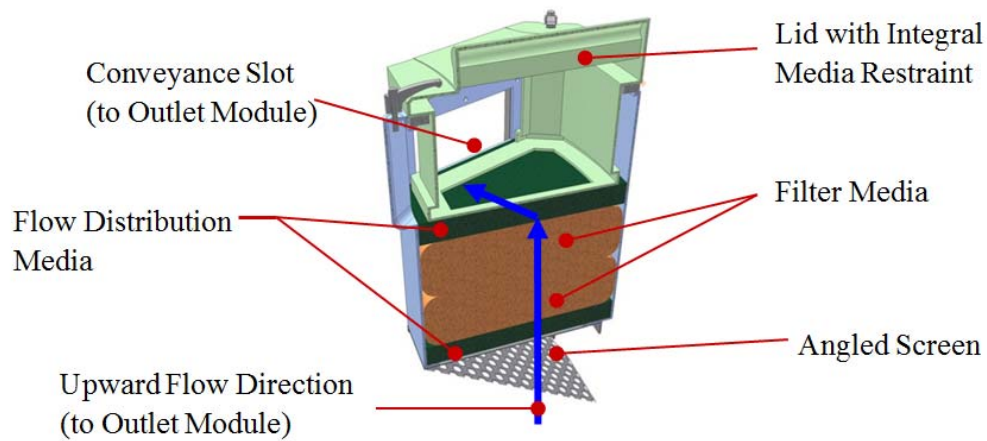


Figure 4: Filter Module Component

During a storm event, the stormwater enters the filter chamber and the sump water stage rises. Larger particles settle to the bottom of the sump and the gross debris and floatables are separated by the angled screens that are below the upflow filter modules. The flow continues to rise and flows through the screens to the filter module. This rising water column in the sump provides a driving head and differential pressure between sump and filter module so that the upward flow can go through the restrained, but partially expanded, filter media in a controlled manner with excellent media contact. Runoff treatment with high flow rates is accomplished by controlled fluidization of the filter media in the media bags so that fine particulates are captured throughout the depth of the

media bags and at the media filter surface. During peak rainfall periods, the flow may exceed the treatment capacity, with the excess bypass flow discharges to the outlet directly from the siphon-activated bypass, while the filter module still keeps treating flows at its rated capacity, and the large sediment is captured in the sump due to gravitational settling. Excess bypassed flows are therefore partially treated by the sump and also by the siphon floatable control. Following a storm event, the elevated water column drains down slowly through the depth of the filter media bags through the draindown outlet. During this draining period, a slight backwashing effect occurs with some of the captured particulates washed from the media filter bags, helping to minimize clogging and prolonging media life. The sump water continues to drain to the standing water level below the level of the media through the draindown port, thereby allowing the media to drain completely and remain aerated between rains. At the same time, the screened trash and debris on the angled screens are also released by the downward flow of the water which are then retained in the sump.

Monitoring Methodology

The performance monitoring of the Up-Flo[®] Filter consisted of hydrologic, water quality, and sediment monitoring, in accordance with the TARP and NJDEP demonstration protocols. ISCO 4250 area-velocity flow meters with depth sensors were used to continuously monitor the hydrological conditions at both the inlet and outlet locations of the Up-Flo[®] Filter, and ISCO 6712 automatic water samplers were used to collect flow-weighted composite samples at the influent and effluent locations. In addition, sediment monitoring was conducted using a liquid-filled, load-cell USGS scour sensor placed on the bottom of the sump for continuously monitoring deposition and scour conditions during storm events (periodic manual sediment depth measurements were also made for verification). Sediment in the sump was also collected at the end of the monitoring period for particle size distribution (PSD), nutrients, metals, and percent volatile solids analyses. This summary report focuses on the water quality performance monitoring and the sump sediment analyses.

Hydrologic monitoring of the Up-Flo[®] Filter included effluent discharge rate, rain depth and intensity, water stage of the filter sump, bypass frequency, duration and volume of runoff flows, and draindown performance after events. An example data sheet for a single event is included in Appendix C. Both ISCO 4250 area-velocity sensors were verified during the controlled hydraulic flow tests and were used to continuously monitor the water stage in the influent sump and the flow rate in the effluent pipe.

The data loggers for the flow meters, rain gage, and water samplers, were set up before each targeted storm event. The rain depth and intensity were also monitored continuously by the ISCO 674 tipping bucket rain gage installed on the top of the monitoring station. A totalizing rain gage was also located beside the ISCO rain gage for rain depth verification. However, the rainfall data from these rain gages is not expected to accurately represent the rainfall information since there are some tall trees closer to the monitoring station than desired (about half of the tree height in distance). The tipping bucket rain gage's main function was as a trigger for the automatic samplers, not accurate depth measurements. The rain depth information obtained is secondary while the actual flow conditions are of the most importance and were used in evaluating performance. The selection of

events to monitor was based on reliable local weather prediction information, such as contained at: <http://www.weather.com/weather/hourbyhour/graph/Tuscaloosa+AL+USAL0542:1:US>. During the water quality monitoring, the ISCO 674 tipping bucket rain gage was used as a sampler trigger while the area-velocity sensor in the effluent pipe was used for the sampling pacing and for hydraulic performance analyses of the Up-Flo[®] Filter. At the beginning of each event, both automatic samplers were initiated when the rain gage registered 0.02 inches (2 tippings) of rainfall within 30 minutes. The samplers then obtained subsamples simultaneously from the influent and effluent of the Up-Flo[®] Filter based on the programmed sampling pace, which was proportional to the monitored effluent flow rates. The water samples were obtained from the sampler intakes that were placed in small secured plastic trays where the runoff cascaded directly onto the sampler intakes, reducing problems associated with stratified flows. However, due to the demonstrated deficiency of autosamplers for collecting bedload material (inconsistent sampler efficiency for particles larger than about 250 μm), the sump information was used during the mass balance evaluations to identify periods of sampler errors for the large particles. Figure 5 shows the pre-storm field setup and cleaned plastic trays at the influent and effluent locations. Both YSI 6600 water quality sondes were secured in the plastic sampling trays at the inlet and outlet of the Up-Flo[®] Filter for continuous water quality monitoring (mainly for turbidity). After the samples were retrieved and brought to the UA laboratory for initial processing and shipping, the plastic tray at the inlet was emptied into the filter sump for the overall mass balance through the monitoring period.



Figure 5: Pre-Storm Field Setup and Cleaned Plastic Trays of Influent and Effluent

Sediment monitoring is an important part of the mass balance calculations. Two kinds of sediment monitoring were conducted as described below. Before the monitoring period, the filter sump was cleaned and a liquid-filled (degassed water), USGS load-cell scour sensor from Rickly Hydrological Company was placed on the bottom of the filter sump. The scour sensor continuously monitored the sump sediment accumulation rate (sediment depth and mass) over the monitoring period, and continuously detected any sump sediment scouring during storm events. Manual sediment depth measurements were also taken after each storm event to evaluate the use of this unique monitoring tool. Figure 6 is the time series of the sediment accumulation during the last year of the monitoring showing both the results of the load cell and the manual monitoring. The scour sensor was not able to detect accumulations until the sediment depth was at least several inches, but is shown to

accurately follow the fewer manual depth measurements after that initial lag period. There were no obvious periods of significant scour of sediment in the sump. At the end of the monitoring period, sediment grab samples were also collected and analyzed as they were after the first series of tests. The sediments were air dried, weighed, sieved, and analyzed for several size ranges for heavy metals (Cd, Cr, Cu, Pb and Zn), specific gravity, nutrients, sulfur compounds (total sulfide, total sulfate and total sulfite), nutrients (total phosphorus and total nitrogen), chemical oxygen demand (COD), percent volatile solids, and particle size distributions (PSD). The filter media bags and flow distribution material were also dried and weighed to estimate the accumulation of solids within the media to complete the mass balance calculations.

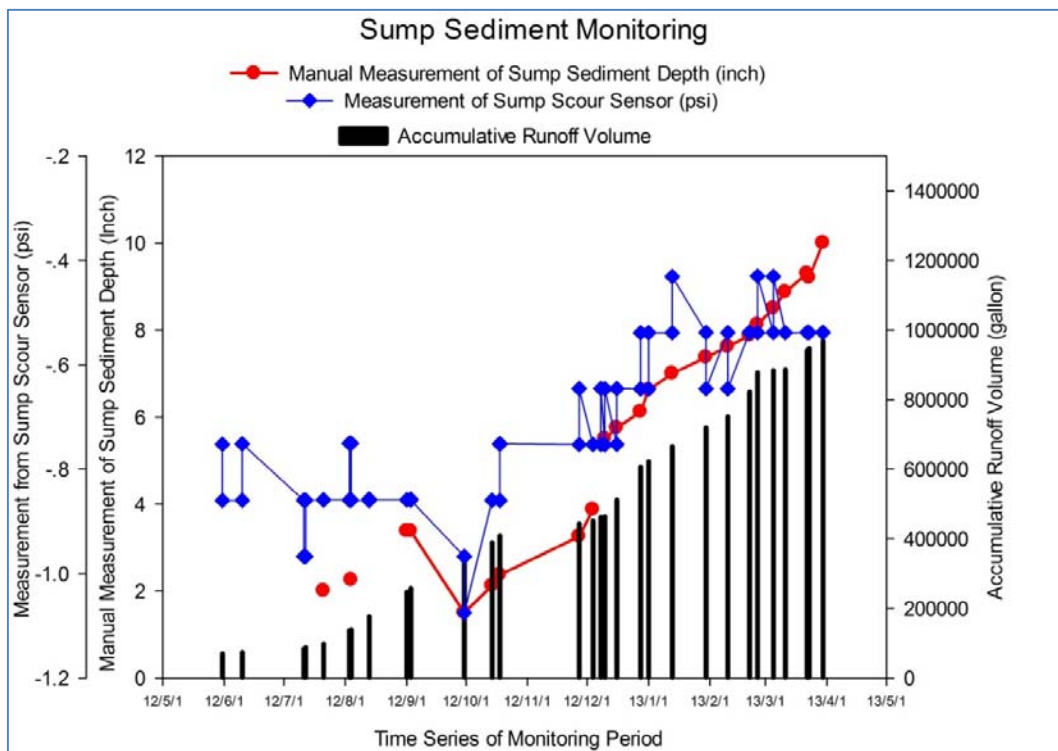


Figure 6: Sump Sediment Depths During One-Year Monitoring Period

Figure 7 is a time series plot of the treatment flow rates observed (the maximum flows associated when the sump water stage dropped back down to the level of the bypass weir). This was assumed to be the level associated with the maximum operational treatment flowrate of the Up-Flo[®] Filter. The flow rate when the sump elevation was dropping was used instead of rising because the sump stage increases were very unsteady and greatly fluctuated as the influent flow rates varied during runoff events. Dropping sump levels on the recession limb of the hydrographs resulted in steadier flow rates and better represented the stage and flow conditions when bypassing occurred. The blue line in the plot verifies the water stage corresponding to the bypass rate, which is shown as the pink line. High treatment flow rates (with large variations) occurred at the beginning of the study period. These early maximum treatment flows ranged from about 100 to 250 GPM. The treatment flow rates dropped dramatically after about nine months in the middle of January 2013, at around the 20th sampled

event after about 34 inches rainfall and 650,000 gallons of runoff were treated by the Up-Flo® Filter. These reduced flow rates were about 50 GPM and were quite stable during the last several months of the monitoring period. The system monitoring ended at the end of March 2013; it is therefore unknown when complete clogging and 100% bypassing would have occurred in the absence of any site maintenance. At the end of the project monitoring period, the old media bags were removed and replaced with new bags.

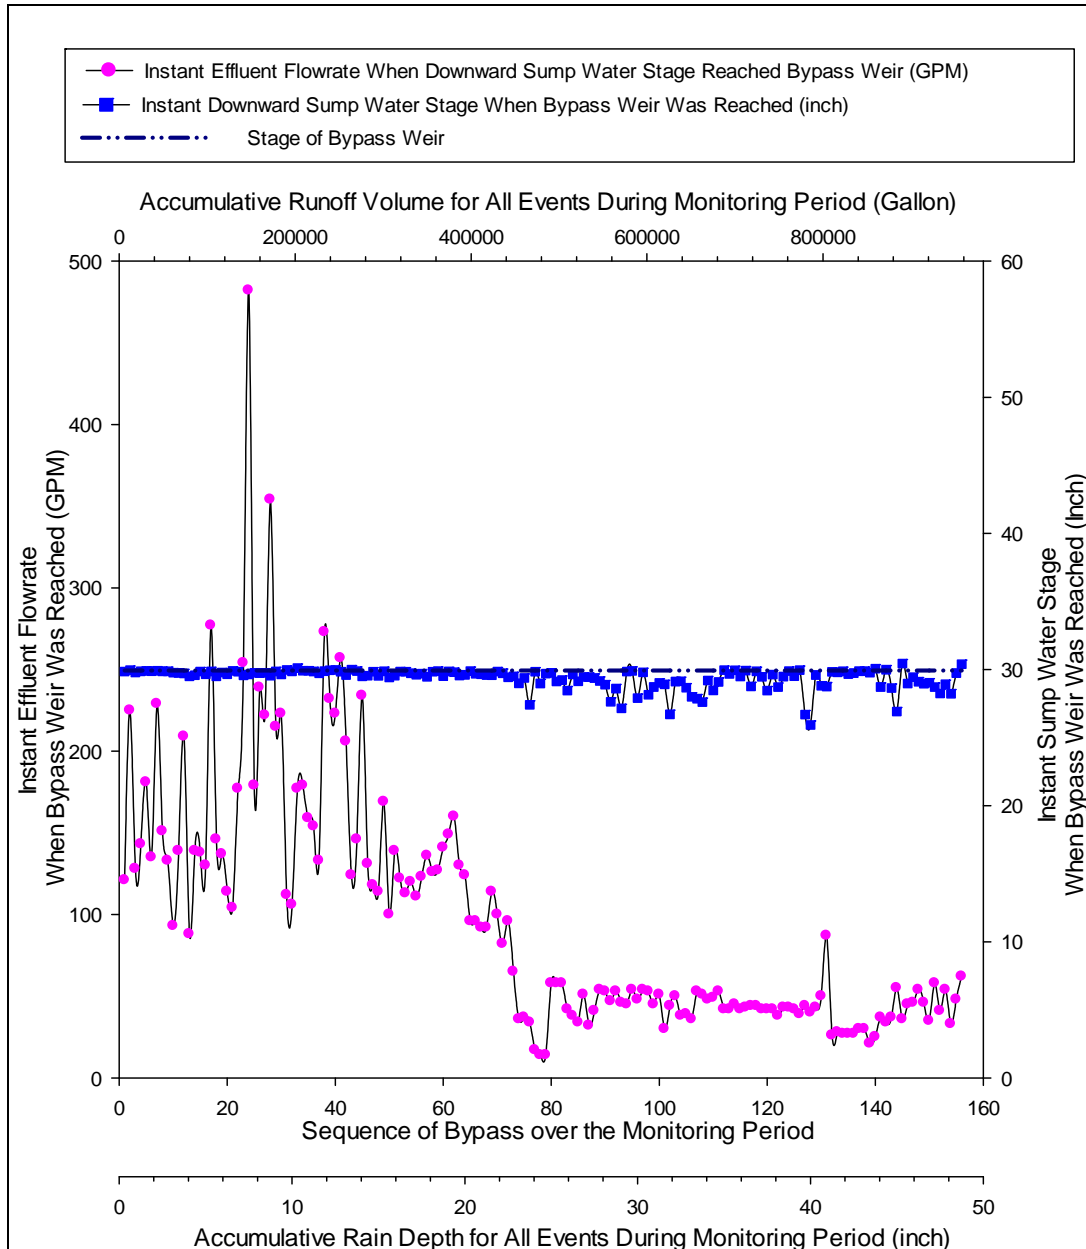


Figure 7: Time Series Relationship of Effluent Flowrate and Sump Water Stage at Bypass Weir

Solids Performance Comparison during Actual Storm Monitoring and

Controlled Sediment Tests

Controlled sediment tests were conducted during the first phase of the actual storm monitoring in order to quantify the solids removal performance under known steady flow rates and particle concentrations. Similar to the hydraulic flow tests, the controlled sediment test influent water was pumped from the adjacent Black Warrior River into a large plastic drum that has flow control outlets to regulate the influent flow rate to the Up-Flo® Filter. Excess water from the pumping was allowed to overflow the drum and drain back into the river away from the Up-Flo® Filter inlet. Flows were calculated by timing how long it took to fill a container having a known volume. Figure 8 illustrates these tests.

Different influent flow rates were tested along with different solids concentrations by manually feeding test particulates into the flow entering the Up-Flo® Filter under steady flow hydraulic conditions. The solids mixture was made using ground silica along with fine and coarse sand in the following proportions: fine sand: coarse sand: Sil-Co-Sil 106: Sil-Co-Sil 250 at 5: 17: 70: 8 mass ratios. This resulted in particle sizes ranging from 20 to 2,000 μm which were tested at approximately 50 mg/L, 100 mg/L, 250 mg/L, and 500 mg/L concentrations. The river water also contributed small portions of fine particles to the mixture. The test mixtures were not intended to coincide with typical particle size distributions of stormwater, but to represent sufficient amounts of the different particle size categories for individual size analyses using combined sieving/Coulter Counter analyses. The following discussion compares the solids performance test results during the controlled and the actual storm period monitoring to indicate performance by size range. The controlled particle control tests also enabled us to examine performance over a wider range of particle size concentrations than were available during the actual storm conditions.



River water is pumped into the plastic flow splitter barrel (high flow test)



River water is pumped into the plastic flow splitter barrel (low flow test)



Pumped river water is discharged from splitter barrel to the 11 gallon plastic tray to manually measure the flow entering the Up-Flo® Filter



Sediment mixture is added to the flow entering the Up-Flo® Filter



Samples are taken from the effluent box after the Up-Flo® Filter



Sample splitting using churn splitter

Figure 8. Controlled Sediment Capture Test

Figure 9 shows the regression plot of SSC performance for these two categories of data, with the blue data points representing the results from the controlled tests and the red data points for the first set of 20 sampled storms along with the 30 sampled storms from the last series of storm

measurements, while Figure 10 shows the regression plot of both categories combined. Appendix A contains the detailed residual analyses and other regression performance data for these performance plots. The overall SSC performance under actual storms was shown to be greater (flatter plots) than those under controlled sediment tests. This is likely due to the controlled solids tests having a greater fraction of smaller particles (from the river water), which are much difficult to be retained by the filter media. These differences are eliminated in the following plots when particle categories are examined separately. This set of SSC plots are therefore not being used in the final performance evaluations because of the differences in the psds of the two series of tests.

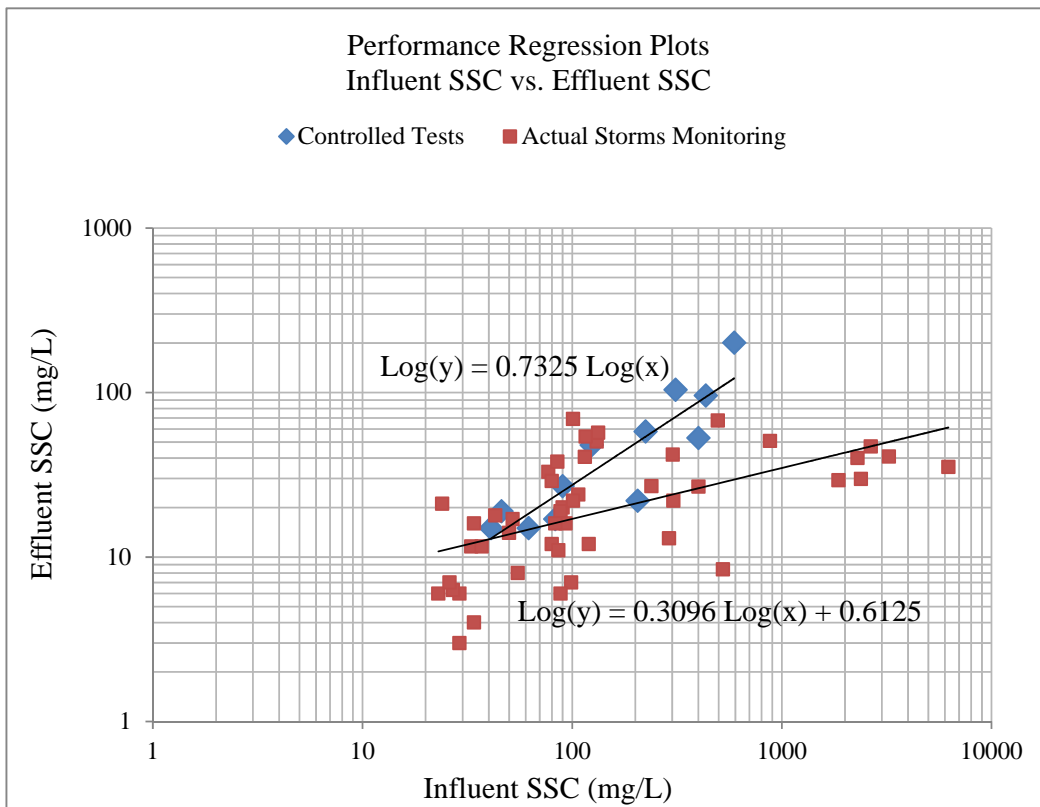


Figure 9: Performance Comparison for SSC

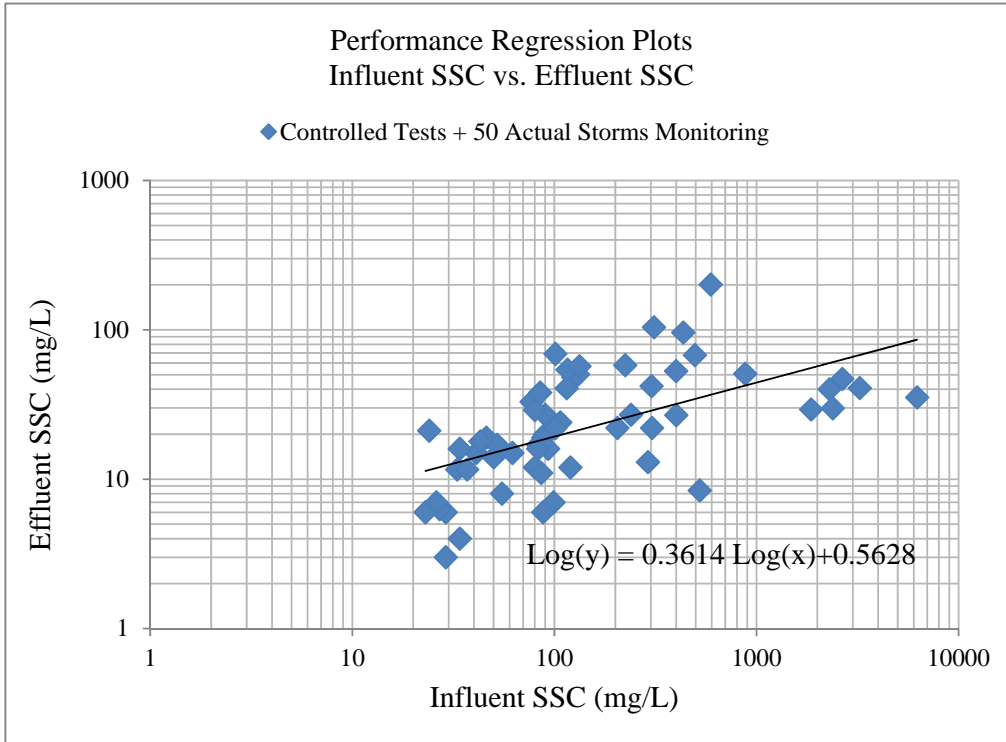


Figure 10: Performance Regression for SSC for Combined Data

Figure 11 is the performance regression plots for 0.45 to 3 μm solids for the controlled sediment tests and during actual storm monitoring, while Figure 12 combines the two test phases into one regression. While the influent concentrations during the actual monitored storms were always lower than during the controlled tests (due to the large amount of fine particles in the river water), the slopes of the both regression equations are similar, indicating that the full-scale filter is capable of similarly retaining these very small particles under a wide range of influent concentration and flow conditions, as indicated on the combined plot in Figure 12.

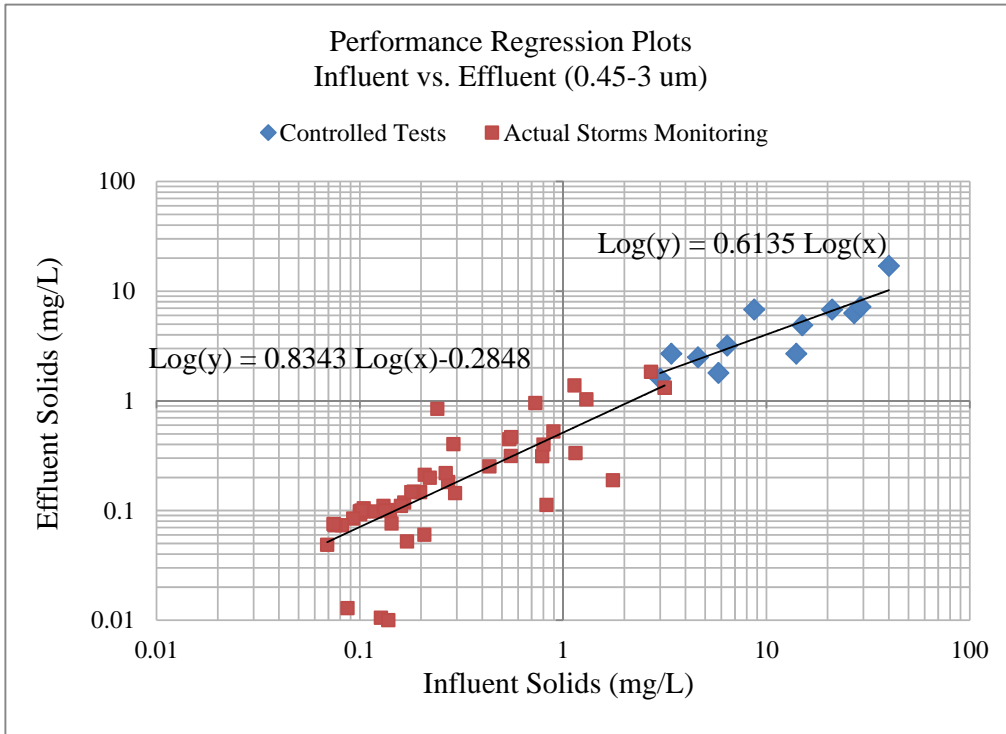


Figure 11: Performance Comparison for 0.45-3 μm Solids

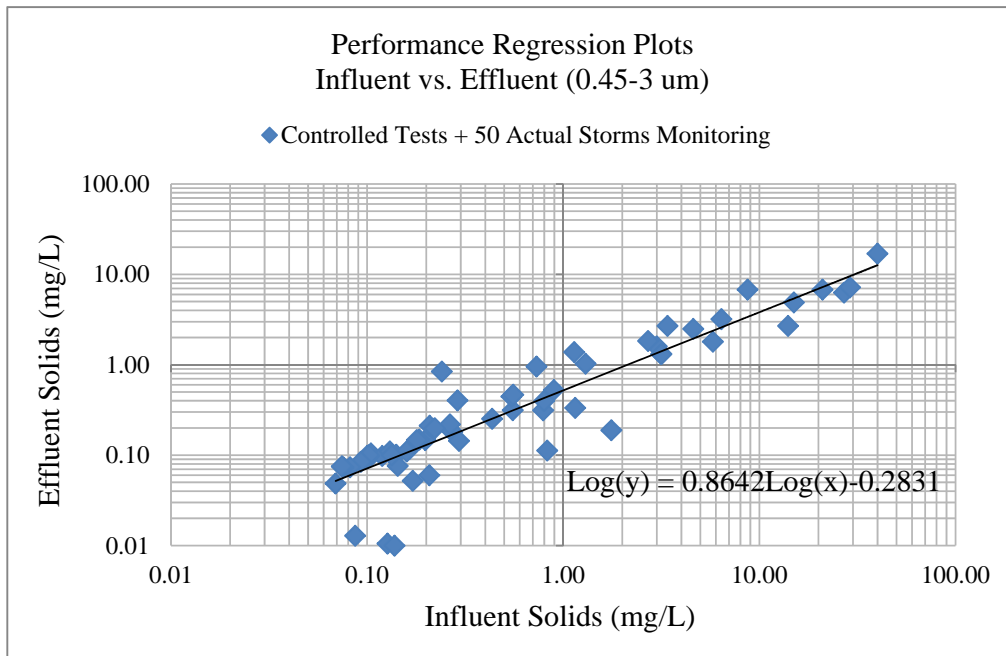


Figure 12: Combined Performance Regression for 0.45-3 μm Solids

Figure 13 shows a similar performance regression plot for 3 to 12 μm particles for the controlled sediment tests and during the actual storm monitoring, while Figure 14 again is the performance

regression for both sets of data combined. A large range of influent solids concentrations were included in this particle size range for both controlled sediment tests and actual storm monitoring, from about 1 mg/L to 100 mg/L, with the controlled test concentrations being on the higher end of the range. The controlled tests resulted in higher effluent concentrations than the actual storms tests for this particle size range, but there was substantial overlap of the data.

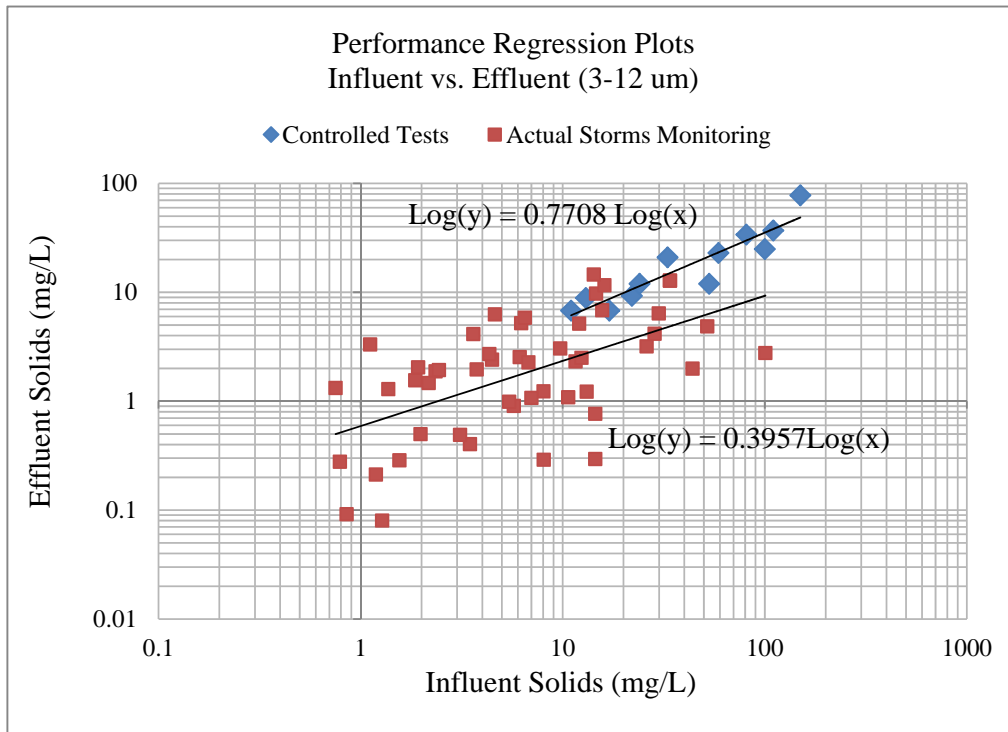


Figure 13: Performance Comparison for 3-12 μm Solids

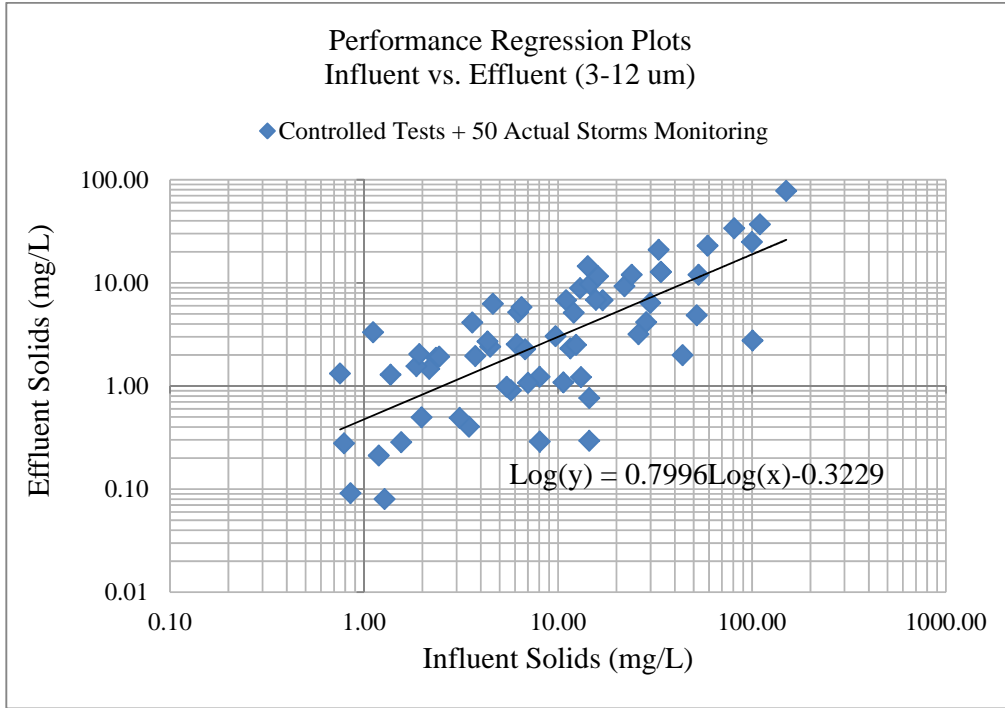


Figure 14: Combined Performance Regression for 3-12 μm Solids

Figures 15 and 16 are the performance regression plots for 12 to 30 μm particles showing the two test categories separately and combined, respectively. Both sets of data had wide ranges of influent solids concentrations with much overlap, with the controlled tests being slightly on the upper range of influent concentrations again.

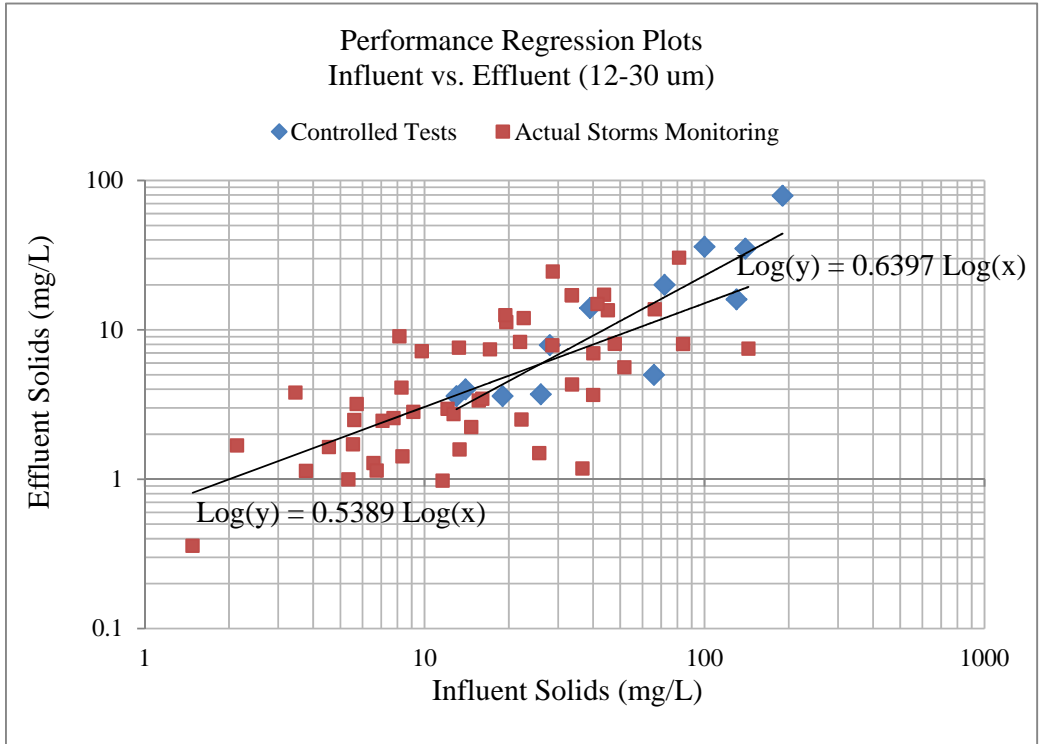


Figure 15: Performance Comparison for 12-30 μm Solids

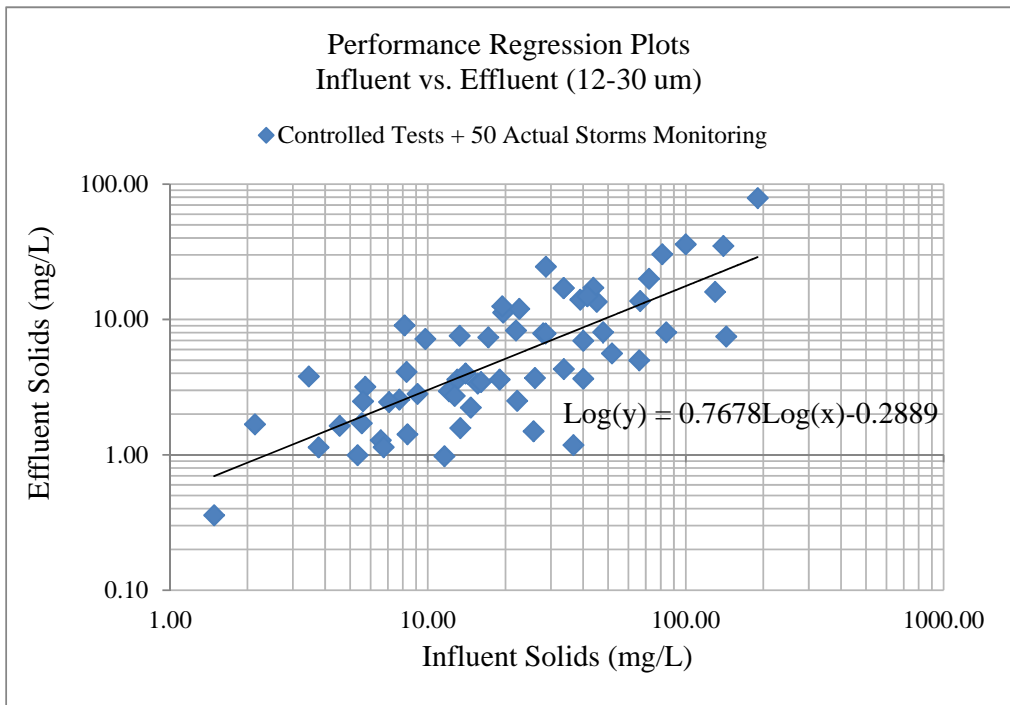


Figure 16: Combined Performance Regression for 12-30 μm Solids

Figures 17 and 18 are similar plots for the 30-60 μm solid particle size range, indicating substantial overlapping data for both test series.

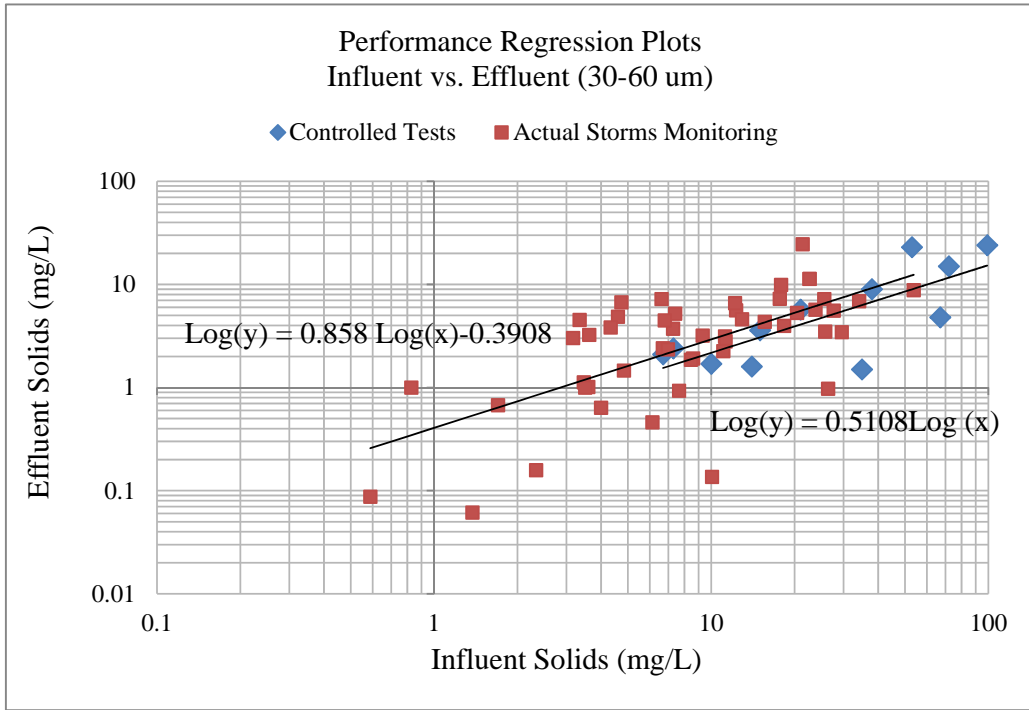


Figure 17: Performance Comparison for 30-60 μm Solids

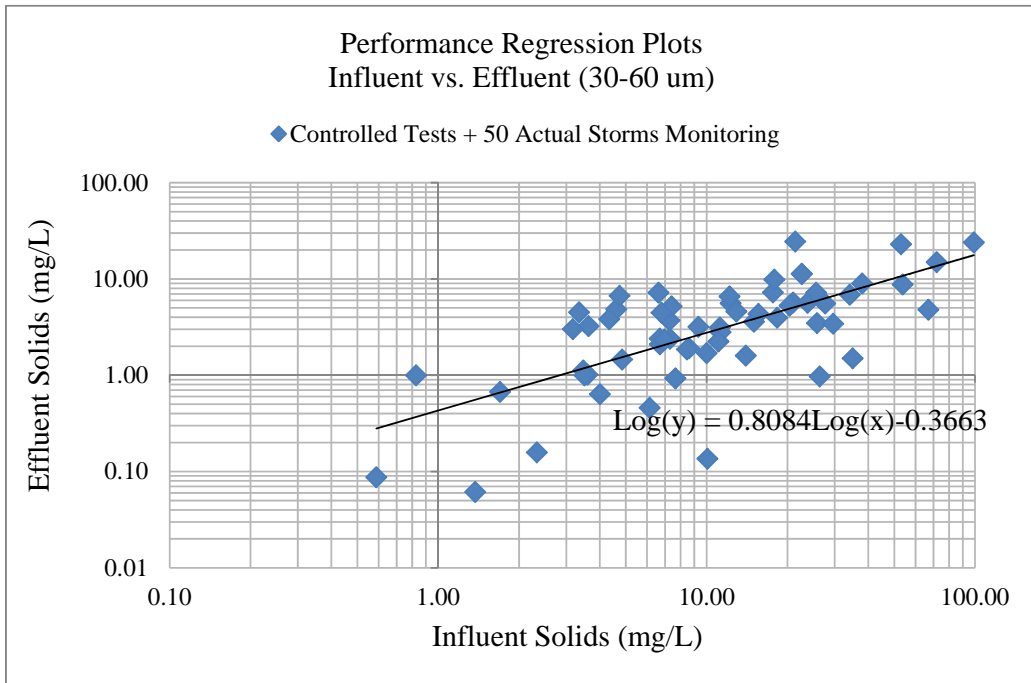


Figure 18: Combined Performance Regression for 30-60 μm Solids

Figures 19 and 20 are similar performance plots for the particulates in the 60-120 μm particle size range, also indicating substantial overlapping of the data.

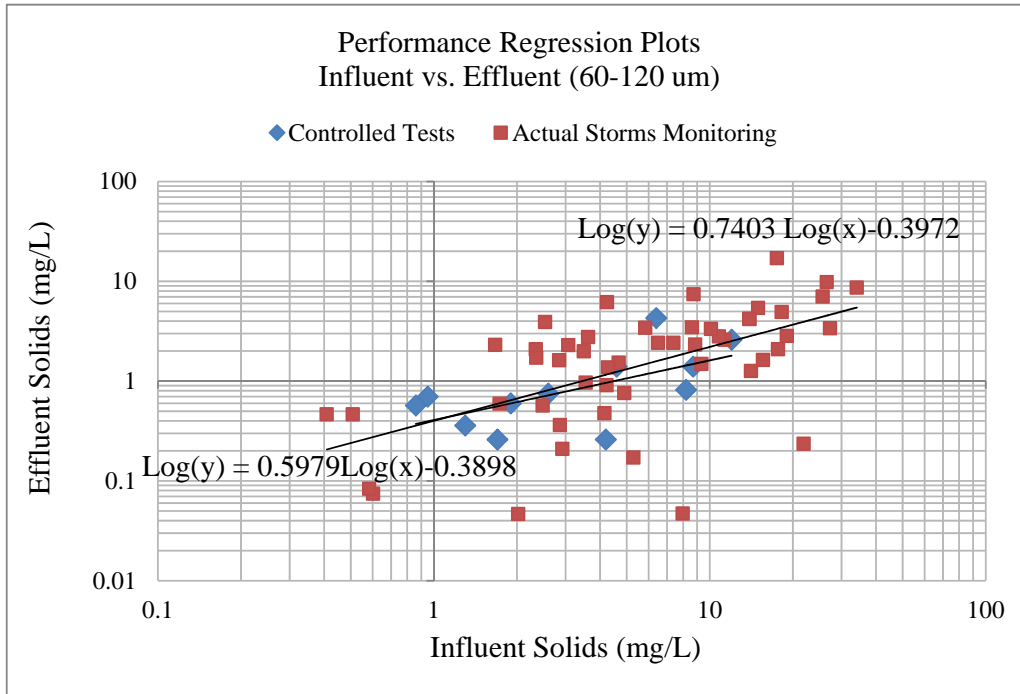


Figure 19: Performance Comparison for 60-120 μm Solids

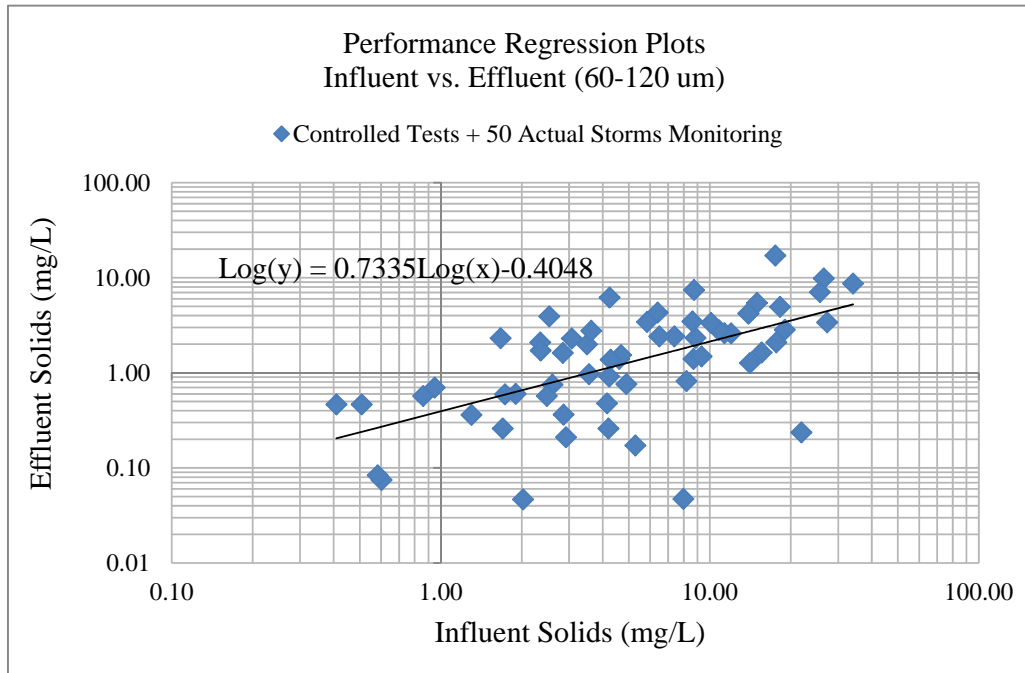


Figure 20: Combined Performance Regression for 60-120 μm Solids

There is no suitable regression for either set of data for the 120 – 250 μm particle range, as shown in Figures 21 and 22. The influent concentration ranges substantially overlap both test series. The effluent concentrations are random and very low (<0.5 mg/L) compared to the influent concentrations. Therefore the performance of this particle size range is described by the average and coefficient of variation (COV) (the ratio of the standard deviation to the average) of the effluent quality. The removals were significant for both categories of testing separately and combined.

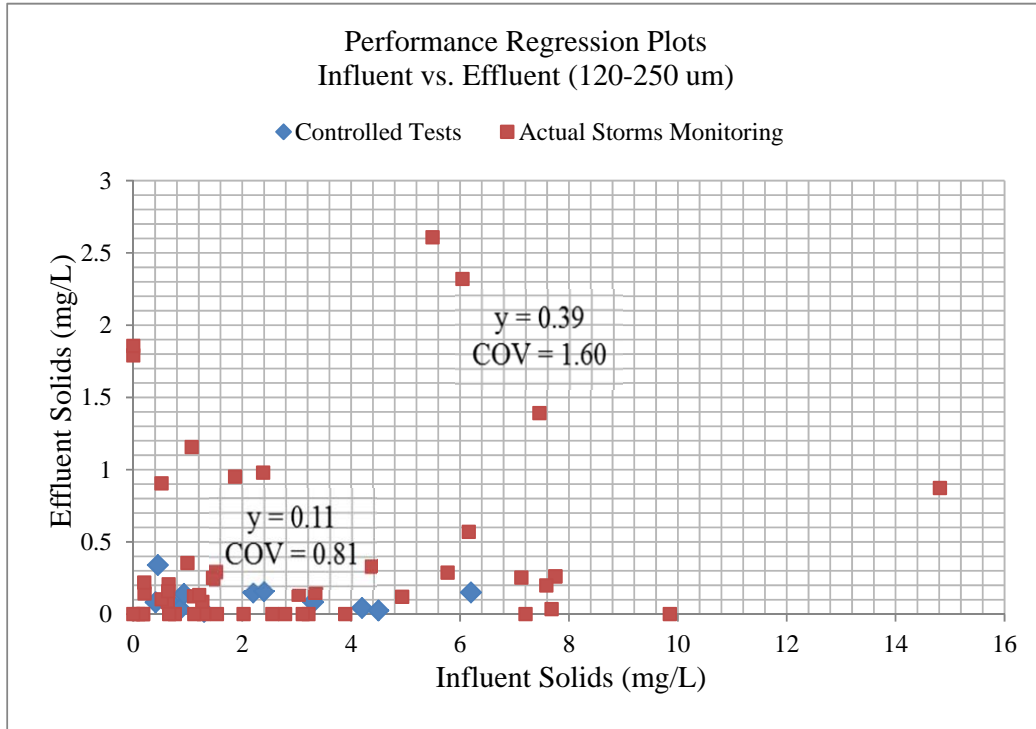


Figure 21: Performance Comparison for 120-250 μm Solids

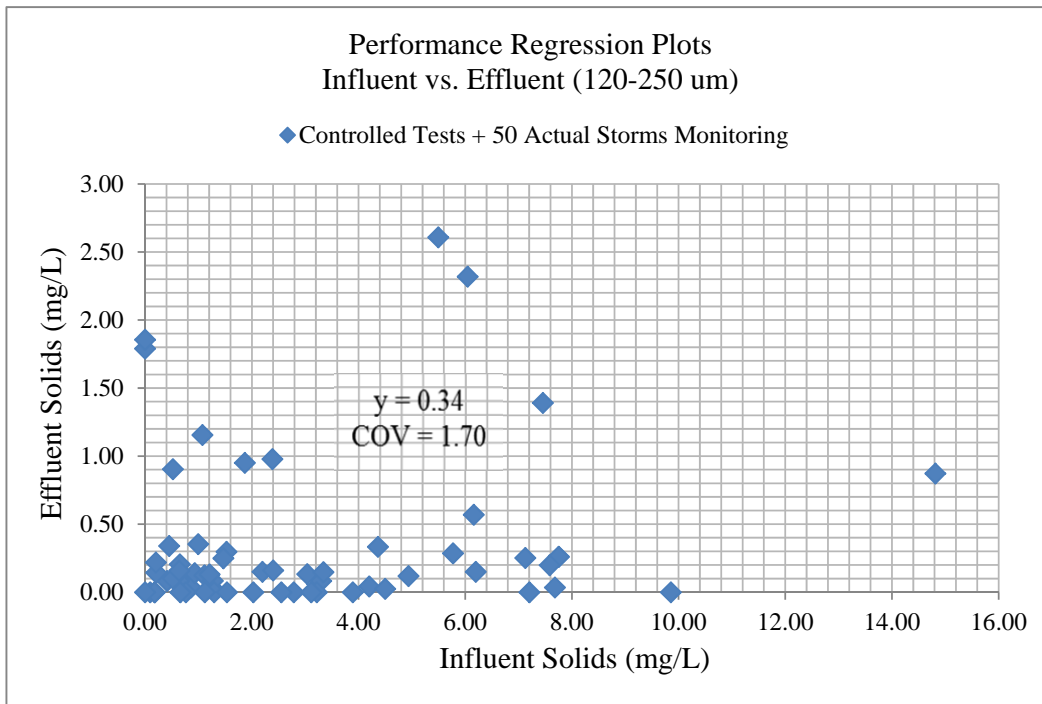


Figure 22: Combined Performance Regression for 120-250 μm Solids

Figures 23 and 24 are the performance plots for the 250 – 1180 μm particle size range. Effluent concentrations in this size range for all of the controlled tests were not detected, while there were some large particles in the effluent in this particle range during the actual storms tests. This is likely due to the difference in the specific gravities of the particles in the two sample sets. During the controlled tests, the ground silica with a 2.65 specific gravity were used, while these particles during the actual storms had much lower specific gravities and therefore had reduced settling capabilities. Some of the low influent concentration tests were associated with effluent concentrations that were greater than the influent concentrations, possibly indicating some scour in this size range, or just more uncertainty in the analyses for these sizes at the low concentrations observed. Therefore, the combined regression, as shown in Figure 24, only considers the performance during actual storm monitoring.

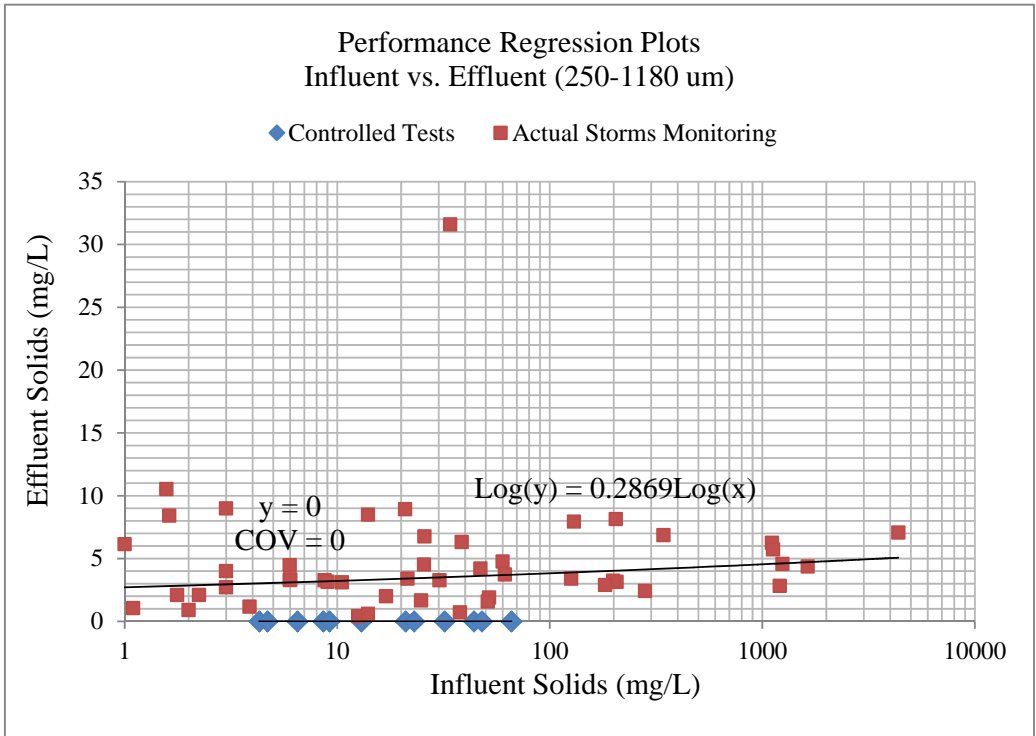


Figure 23: Performance Comparison for 250-1180 μm Solids

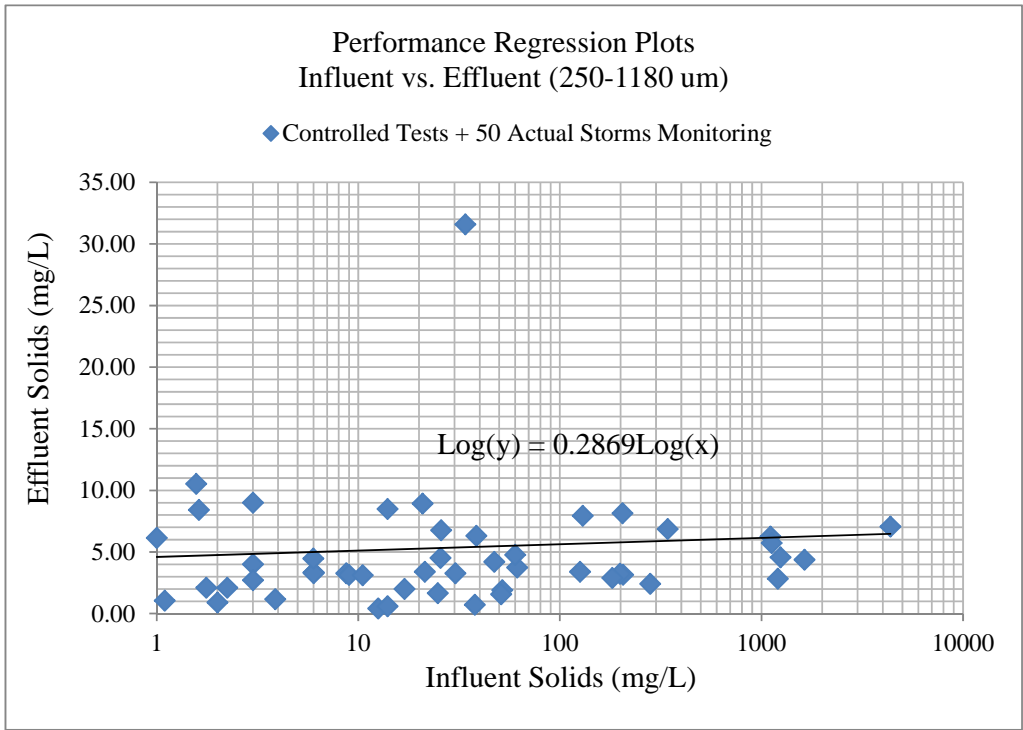


Figure 24: Combined Performance Regression for 250-1180 μm Solids

There were no detected effluent concentrations for the largest particle size category (>1,180 μm) during either the controlled or actual storm monitoring periods. Therefore, no performance comparison plots or regressions for this size range were prepared (effluent = 0 mg/L under all conditions regardless of the influent solids concentrations).

Detailed results of the regression analyses (with ANOVA and residual evaluations) for the particle size ranges are included in Appendix A. In summary, the performances of the controlled and actual storm tests were very similar. It was originally thought that the specific gravity of the ground silica and sand components during the controlled tests (being about 2.65) would result in significantly better removals compared to the same particle ranges during the actual storm tests, when the specific gravities were much lower (1.5 to 2.5). Apparently, the UpFlo[®] filter is less sensitive to these specific gravity differences than originally thought, and as would be evident for a sedimentation type control. Two differences were noted during these tests. The influent solids concentrations for the smallest particle size range during the controlled tests were larger than those observed during the actual storm monitoring likely due to a greater amount of fine suspended matter in the river water that was used during these controlled tests. However, the performance relationships during the two test series for this size were similar when combined. Also, the performance of the 250 to 1,180 μm particle size range during the actual rains apparently were somewhat affected by automatic sampler inconsistencies in this larger size range or light-weight organic material, resulting in decreased performance compared to the controlled tests. The mass balance evaluations and sump analyses described in the next section were also used to examine the performance in this larger particle size range.

As noted, the PSDs for the controlled tests were not intended to be similar to stormwater, but were designed to provide sufficient particulate mass in each of the size ranges for the targeted analyses and comparison with those in actual storms. These performance equations for each separate size range are being used in WinSLAMM to predict the performance of the UpFlo[®] filter under a wide range of psd and concentration conditions. Performance regression and ANOVA analyses for other monitored constituents, including nutrients, metals, and bacteria, are shown in Appendix D.

Sum-of-Loads and Mass Balance Evaluations

Large subsamples of the filter sump sediment were collected for drying and further analyses at the end of the monitoring period to compare with the calculated particulate removals during the monitoring period from the automatic samplers. Automatic water samplers have decreased sampler efficiency for large (>250 μm) particles, but can also bias the results of large particles if the intakes are located near the bottom of a flow path where bedload accumulates. This mass balance monitoring is therefore another QA/QC check of the monitoring data.

Sump sediment analyses included particle size distribution (PSD), percent volatile solids, specific gravity, bulk density, and selected constituents for separate particle size ranges. The evaluation focused on an overall solids mass balance calculation for the calibration of the performance data from the auto samplers. The sediment analyses effort also included continuous monitoring of sump sediment accumulations by periodically manually measuring the sediment depth, and automatically

recording using a liquid-filled (degassed water) USGS load-cell scour sensor (from Rickly Hydrological Company) placed on the bottom of the sump. The filter media bags were also carefully removed when the sump sediment was sampled and replaced with new media bags. The used media bags were also dried and weighed to estimate the accumulation of solids captured within the media.

About 10 inches of sediment was measured in the sump at the end of the monitoring period (on April 2nd, 2013). During the monitoring period, about 980,000 gallons of runoff had been treated by the UpFlo[®] filter system. In order to keep sediment accumulations well away from the bottom of the filter media bags and coarse screening, the maximum sediment depth before cleanout needs to be less than 2 ft deep. This depth of sediment may therefore accumulate in about 2.5 years of operation for the rain and runoff conditions encountered at the test site (about 60 inches of rainfall a year, or 150 inches of rain before the sump would require cleaning).

Four large subsamples were obtained from the sump for analyses at the end of the monitoring period. The particle size distribution plots for these sump sediment samples are shown on Figure 25. The plots shows that the median particle size in the sump was about 390 μm , and about 10% of the captured mass retained in the sump was less than 80 μm . The sediment coefficient of uniformity was 6.7 (the ratio of the 60th percentile diameter to the 10th percentile diameter). Very few particles smaller than 50 μm are observed in catchbasin sumps, as the highly turbulent flow conditions during storms mostly hinders the settling of fine materials.

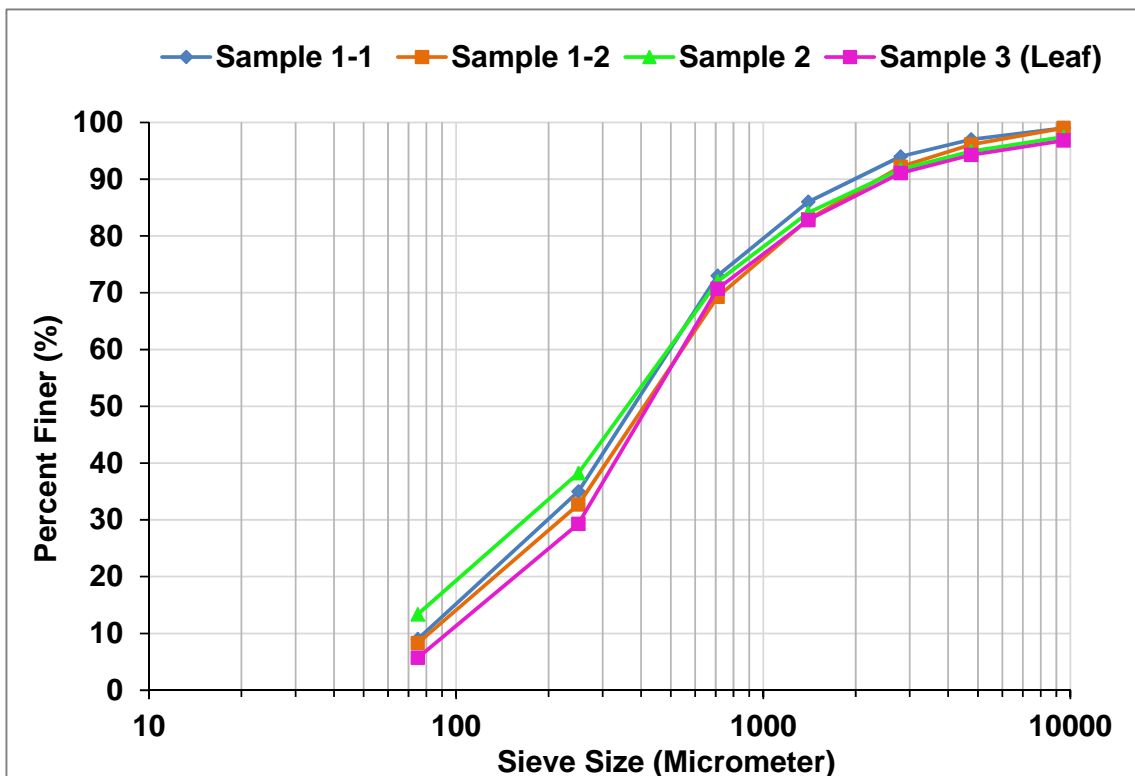


Figure 25: Particle Size Distributions of Four Sub Subsamples.

Table 4 shows that the average dry bulk density of the sampled sediment was about 0.6 g/cc. This bulk density value is low compared to those for typical urban street dirt and sump sediments (usually about 1 g/cc). The Bama Belle monitoring site has nearby trees and leaves were about 3.5% by mass of the sediment (but comprised a large volume fraction). Table 5 shows that the specific gravities of the sediment (always larger than the bulk density as the specific gravities are corrected by the void volume) increased as the particle size ranges decreased, indicating increasing amounts of mineral soils with decreasing size and larger amounts of lighter organic material for the larger particles.

Table 4: Solids Characteristics of Sump Sediment Samples (average of four large subsamples)

Average Dry Bulk Density (g/cc)	d ₁₀ (μm)	d ₅₀ (μm)	d ₆₀ (μm)	Coefficient of Uniformity (C _u)*
0.6	80	390	525	6.7

* d₆₀/d₁₀

Table 5: Solids Characteristics of Sump Sediment Samples

Sieve size range (um)	Specific Gravity (g/cc)	Total Solids Portion Size Range (%)	Volatile Solids of Particles in Size Range (%)
Leaves	2.28	1.85	93.2
Sticks	0.84	2.00	81.2
>2800	0.66	7.29	70.9
1400 - 2800	1.15	8.90	57.8
710-1400	1.43	13.08	42.7
355-710	2.56	18.31	26.1
180-355	2.76	20.32	19.4
75-180	2.97	17.32	20.6
45-75	3.30	5.10	25.7
<45 (Pan)	3.46	5.83	26.0

Tables 6 and 7 show the results of chemical analyses (mostly heavy metals and nutrients) for each particle size of the sediment samples. The composite samples were prepared after drying and sieving the large bulk subsamples. Lead, copper, and zinc show the typical pattern of having increasing concentrations in the smaller particle sizes. Cadmium was only detected barely above the detection limits and showed no obvious pattern, while chromium had the highest concentrations in the mid to large particle sizes. The large organic material (leaves and sticks) had the lowest concentrations of the heavy metals, including the large mineral fraction (general). The nutrients were more evenly distributed by particle size, with total nitrogen apparently higher in the leaf fraction, and the COD having a larger peak concentration with the larger sieved material.

Table 6. Heavy Metal Content of Sump Sediments

Sieve size range (µm)	Cd (mg/kg)	Cr (mg/kg)	Pb (mg/kg)	Cu (mg/kg)	Zn (mg/kg)
Leaves	1.6	7	5.8	28	90
Sticks	<0.5	3	2.7	12	62
>2800	1	12	8.8	20	131
1400 - 2800	1.5	130	16	25	233
710-1400	1.4	104	20.6	26	213
250-710	0.5	55	14.7	13	127
75-250	0.9	39	28	47	209
<75 (Pan)	1.5	71	45.9	53	344
DL	0.5	2	0.5	2	2

Table 7. Nutrient and Other Analyses of Sump Sediments

Sieve size range (µm)	COD (mg/kg)	Total Nitrogen (mg/kg)	Total Phosphorus (mg/kg)	Total Sulfate* (mg/kg)
Leaves	3,500	8,170	213	2,120
Sticks	2,230	5,490	78	1,630
>2800	11,800	5,750	436	2,620
1400 - 2800	3,100	6,430	128	1,370
710-1400	1,350	7,200	65	1,300
250-710	750	1,330	374	860
75-250	1,980	2,740	164	2,040
<75 (Pan)	3,350	4,540	53	4,380
DL	50	50	10	10

*total sulfide and total sulfite were all BDL (DL = 50 and 100 mg/kg respectively)

About 10.5 ft³ (corresponding to about 400 lbs) of sediment was calculated to be in the sump after the one-year monitoring period based on the known geometry of the filter sump, the calculated dry bulk density of the sediment (0.6 g/cc), and the measured sump sediment depth (10 inch). About 150 lbs of this total mass in the sump were assumed to be associated with the 25 selected sampled storms during the second monitoring period, based on the ratio of the runoff depth for the monitored storms and runoff for all storms during the period. Only 25 of the 30 total events were used in this sum of loads calculation as five sampled events were excluded due to unusually high mass loads of particles from the influent auto sampler for some size ranges which led to a large bias in the mass balance. About 20 lbs of material was also captured in the filter media bags and flow distribution material during the one year period (calculated by the weight increase between the initial weighing and final weighing at the end of the study period after the media bags and flow distribution material were dried and weighed), with about 7.7 lbs of captured material in the filter modules associated with the 25 sampled storms.

A total of about 170 lbs of solids was estimated to be retained in the whole filter system (filter media and sump bottom) associated with the 25 monitored storms during the one year period. This total mass was prorated into each particle size range of each selected sampled event based on the sump sediment PSD. The sump mass indicated only about half of the total measured particulate removals as measured by the automatic samplers (assuming a bulk density of 0.6 g/cc). With a typical bulk

density closer to 1 g/cc, the mass balance would be quite close. As a conservative approach, the automatic sampler data was used for the particles <250 µm, while the prorated sump mass (likely low) was used for the larger particles (acknowledging the autosamplers have inconsistent performance for the larger particles). Similar mass balance calculations were also conducted to a set of 16 sampled storms from first full-scale monitoring phases (which with associated 191 pounds of sump sediment). Not all of the initial 20 full-scale monitoring events had complete data sets, so four were removed from these analyses. Therefore, a total of 41 sampled storm events were included in the final sum-of-loads evaluation to verify the solids removal performance for a wide range of monitoring conditions.

Table 8 shows the overall accumulative sum-of-loads performance associated with the 41 sampled events for each particle size. The total influent measured particulates for these 41 events were 478 pounds (217 kg), while 93 pounds (42 kg) was the measured effluent particulate mass, for a measured accumulation close to the observed 400 lbs found in the sump. The solids captured for each specific particle range increased as the particle sizes increased, as expected, and the overall removal rate for the total particulates loading was about 80%, which was within the design goal of solids removal performance of the full-scale Up-Flo® filter.

Table 8: Accumulative Mass of Influent and Effluent Total Particulates by Particle Size Range

Particle Size Range (um)	Influent Total Mass (With Sump*) (lbs)	Effluent Total Mass (lbs)	Percent Reduction
0.45 - 3	1.75	1.13	35.6
3 - 12	58.79	11.41	80.6
12 - 30	85.24	26.03	69.5
30 - 60	52.35	16.29	68.0
60 - 120	43.04	11.01	74.4
120 - 250	52.94	1.97	96.3
250 - 1180	120.54*	19.49	83.8
> 1180	63.28*	6.14	90.3
Total:	478*	93	80.4

* Without the sump mass corrections for the large particle sizes, the overall calculated performance would be much larger due to likely biases in the influent autosampler

Table 9 shows the summary information for the regression and ANOVA analyses for each particle size range for the sum-of-load evaluations for the mass removals (in lbs). These regression equations are different from the previous regressions that were based on influent and effluent concentrations (mg/L). All of these regression calculations were based on log₁₀ transformed data, except for the particle size 120-250 µm and >1180 µm due to the large fraction of non-detectable effluent concentrations. These regressions and ANOVA summaries demonstrate that all of the particle size ranges had statistically significant reductions, as the p-values based on Wilcoxon Signed Rank hypothesis test were all less than or equal to 0.005. Some of the R² values are low, corresponding to effluent concentrations that varied little. Detail results of these regression, ANOVA, residual, and hypothesis tests are attached in Appendix B.

Table 9: Summary of SOL Regression Performance of Particle Size Ranges (41 eligible events); influent and effluent values are loads (lbs)

Particle Size (um)	Regression Equation	Adjusted R Square	P-value of X Variable	P-value of Intercept	Significance Factor of Equation	P-value of Influent Equals to Effluent
0.45 to 3	$\text{Log}(y) = 1.0979\text{Log}(x)$	0.95	<0.0001	NA	<0.0001	<0.001
3 to 12	$\text{Log}(y) = 0.7228\text{Log}(x) - 0.6503$	0.46	<0.0001	<0.0001	<0.0001	0.001
12 to 30	$\text{Log}(y) = 0.9318\text{Log}(x) - 0.5856$	0.67	<0.0001	<0.0001	<0.0001	<0.001
30 to 60	$\text{Log}(y) = 1.0153\text{Log}(x) - 0.6203$	0.59	<0.0001	<0.0001	<0.0001	<0.001
60 to 120	$\text{Log}(y) = 0.9936\text{Log}(x) - 0.7933$	0.43	<0.0001	<0.0001	<0.0001	<0.001
120 to 250	$y = 0.048$ (COV = 2.42)	NA	NA	NA	NA	<0.001
250 to 1180	$\text{Log}(y) = 0.4626\text{Log}(x) - 0.6972$	0.17	0.0048	<0.0001	0.0048	<0.001
>1180	$y = 0.1523x$	0.27	0.0042	NA	0.0044	<0.001
Total (SSC)	$\text{Log}(y) = 0.9273\text{Log}(x) - 0.7165$	0.59	<0.0001	<0.0001	<0.0001	<0.001

Figures 26 and 27 show the particle size distributions for the accumulative particulate solids percentage and mass distributions for these 41 sampled storm events, incorporating the prorated portion of the sump sediment for the large particles. The accumulative percentage plot indicates that the overall median particle size of the influent was about 60 μm , while the median particle size for the effluent was about 20 μm .

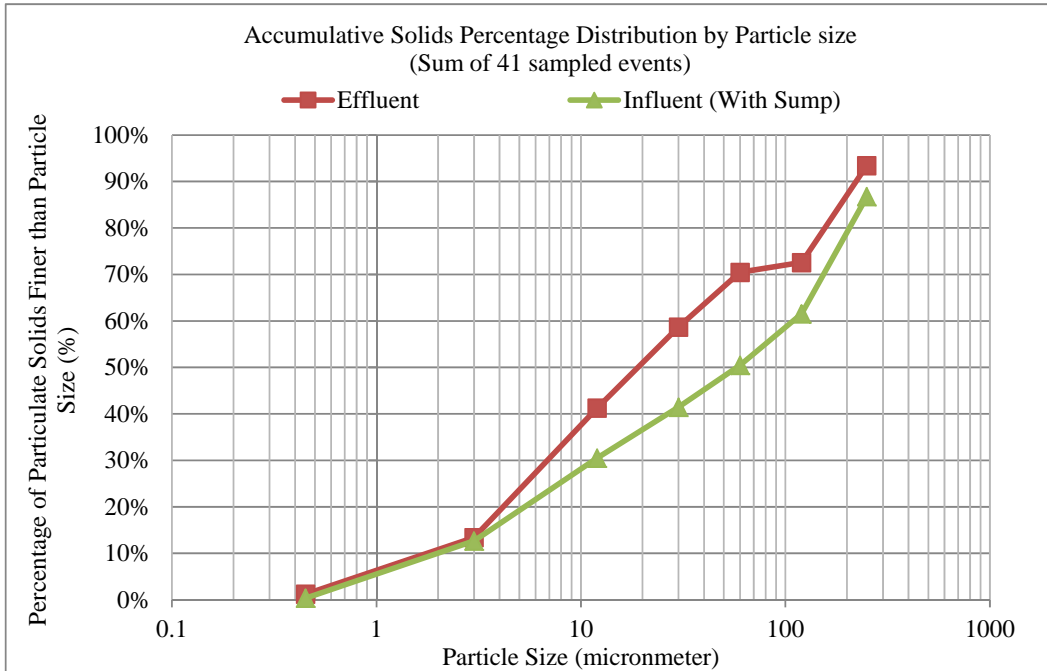


Figure 26: Accumulative Solids Percentage Distribution by Particle Size with Sump Sediment (41 Sampled Events)

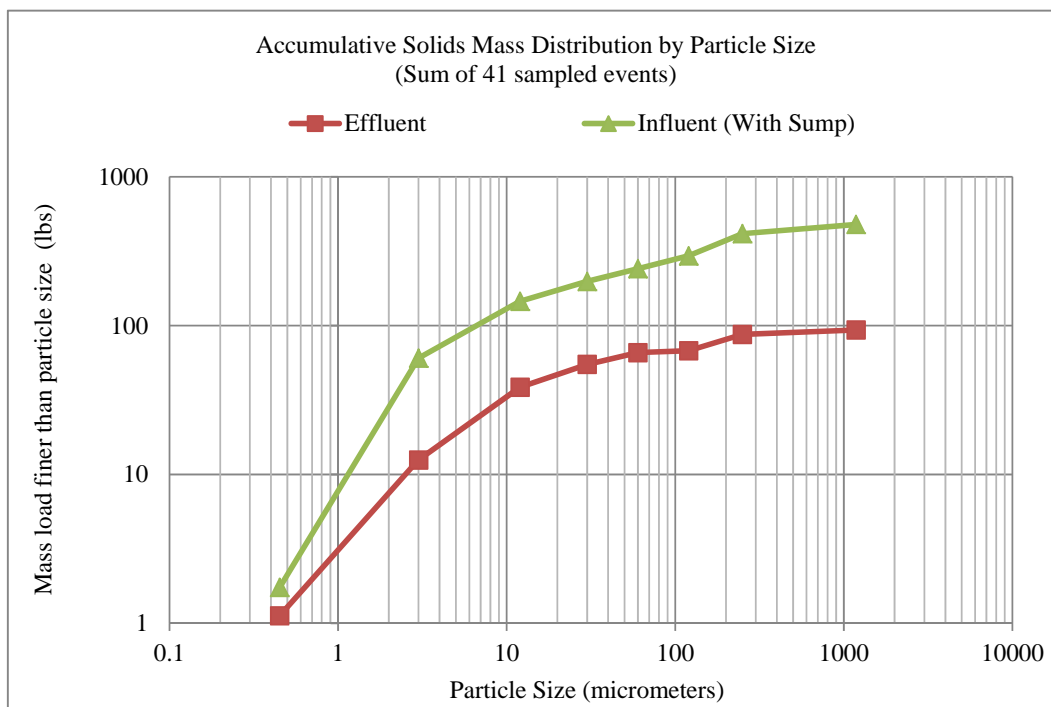


Figure 27: Accumulative Solids Mass Distribution by Particle Size with Sump Sediment (41 Sampled Events)

Appendix A.1: Regression and ANOVA Performance Comparison for SSC


Controlled Sediment Test

SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.99
R Square	0.99
Adjusted R Square	0.90
Standard Error	0.18
Observations	12.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	31.63	31.63	1005.81	0.00
Residual	11	0.35	0.03		
Total	12	31.98			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.73	0.02	31.71	0.00	0.68	0.78	0.68	0.78

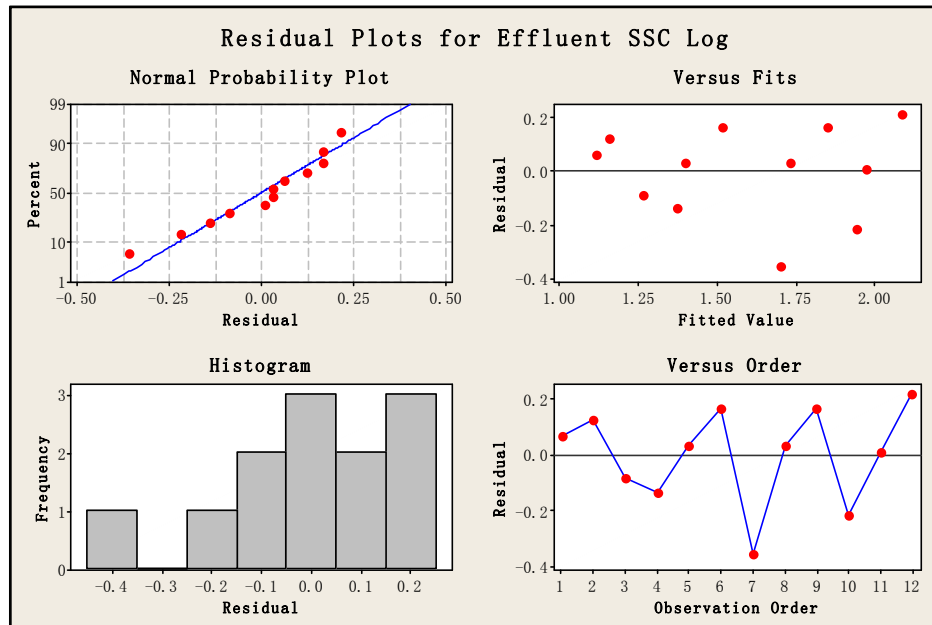


Actual Storms Monitoring (50 sampled storms)

SUMMARY OUTPUT


Regression Statistics	
Multiple R	0.57
R Square	0.33
Adjusted R Square	0.31
Standard Error	0.29
Observations	47.00

ANOVA					
	df	SS	MS	F	Significance F
Regression	1	1.76	1.76	21.67	0.0000
Residual	45	3.66	0.08		
Total	46	5.42			

	Coefficients	Standard Error	t Stat	P-value	Lower 95%	Upper 95%	Lower 95.0%	Upper 95.0%
Intercept	0.61	0.15	4.13	0.0002	0.31	0.91	0.31	0.91
X Variable 1	0.31	0.07	4.66	0.0000	0.18	0.44	0.18	0.44

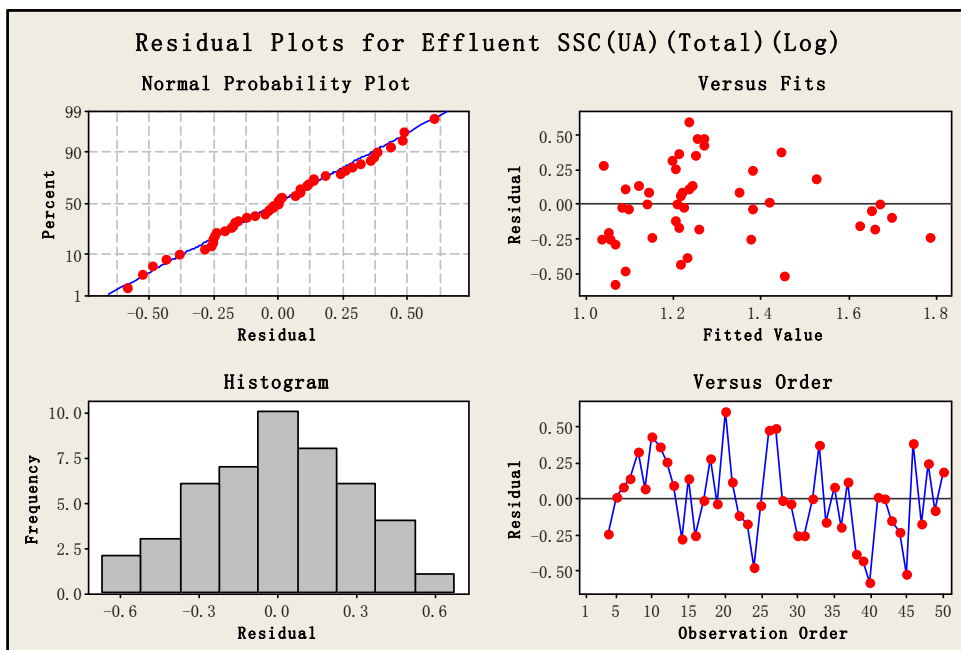

Controlled Sediment Test + Actual Storms Monitoring (50 sampled storms)

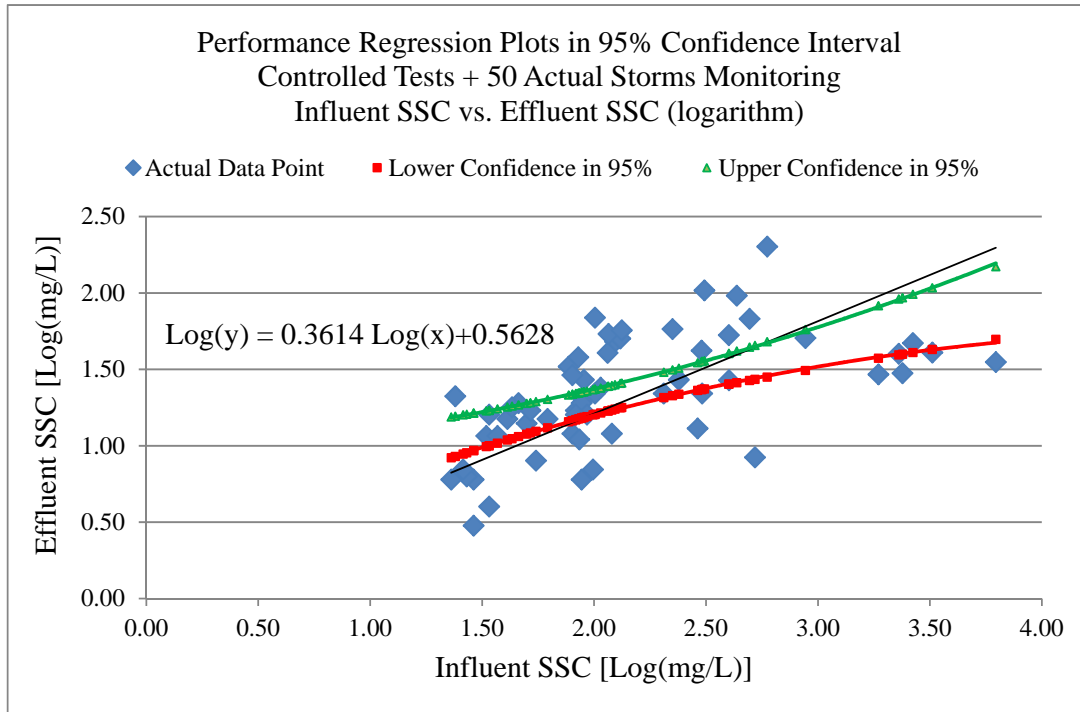

SUMMARY OUTPUT


Regression Statistics	
Multiple R	0.5760
R Square	0.3317
Adjusted R Square	0.3200
Standard Error	0.3050
Observations	59

ANOVA					
	df	SS	MS	F	Significance F
Regression	1	2.6313	2.6313	28.2946	0.0000
Residual	57	5.3008	0.0930		
Total	58	7.9321			


	Coefficients	Standard Error	t Stat	P-value	Lower 95%	Upper 95%	Lower 95.0%	Upper 95.0%
Intercept	0.5628	0.1515	3.7155	0.0005	0.2595	0.8661	0.2595	0.8661
X Variable 1	0.3614	0.0680	5.3193	0.0000	0.2254	0.4975	0.2254	0.4975

Residual Plots for Effluent SSC (ctrl+50) (Log)


Normal Probability Plot

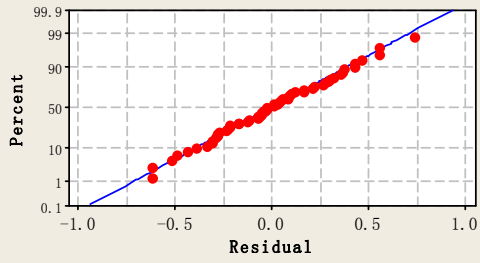


Versus Fits

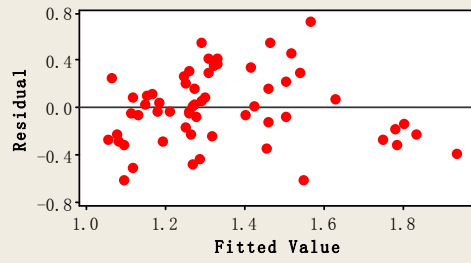

Histogram

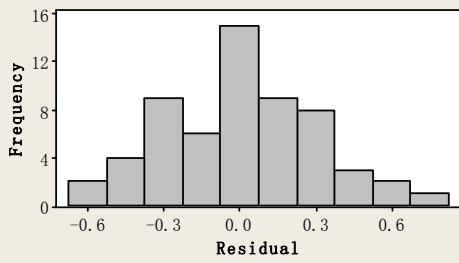

Versus Order

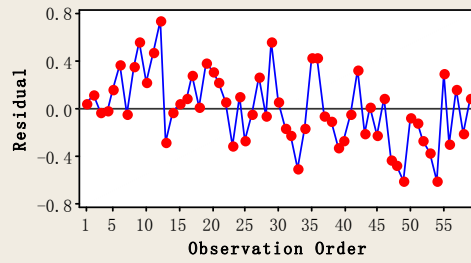

Appendix A.2: Regression and ANOVA Performance Comparison for 0.45-3 μ m Solids


Controlled Sediment Test

SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.98
R Square	0.95
Adjusted R Square	0.86
Standard Error	0.16
Observations	12.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	5.37	5.37	215.11	0.00
Residual	11	0.27	0.02		
Total	12	5.64			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.61	0.04	14.67	0.00	0.52	0.71	0.52	0.71

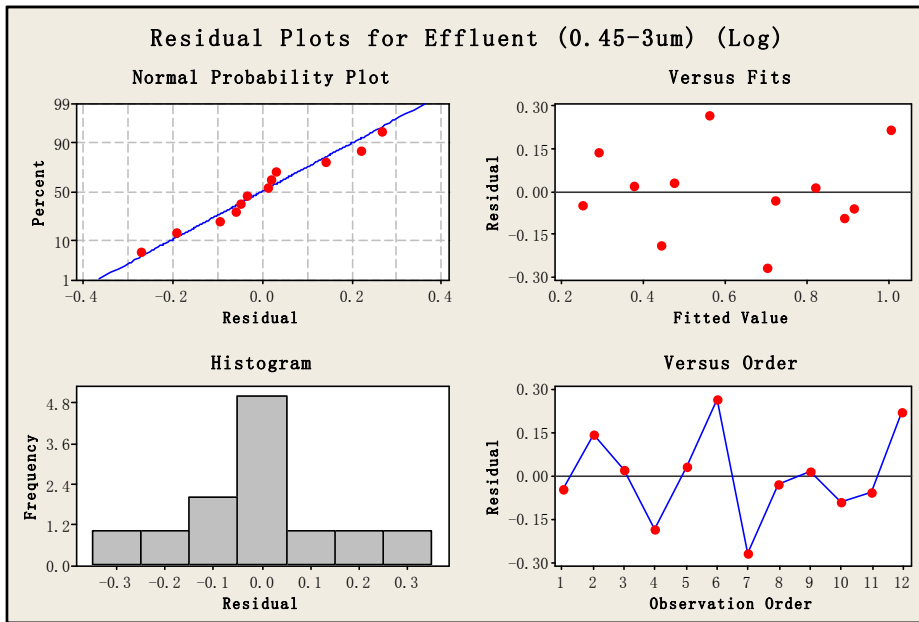


Actual Storms Monitoring (50 sampled storms)


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.81
R Square	0.66
Adjusted R Square	0.65
Standard Error	0.28
Observations	49.00

ANOVA					
	df	SS	MS	F	Significance F
Regression	1	7.36	7.36	90.97	0.00
Residual	47	3.80	0.08		
Total	48	11.16			

	Coefficients	Standard Error	t Stat	P-value	Lower 95%	Upper 95%	Lower 95.0%	Upper 95.0%
Intercept	-0.28	0.06	-4.42	0.00	-0.41	-0.16	-0.41	-0.16
X Variable 1	0.83	0.09	9.54	0.00	0.66	1.01	0.66	1.01

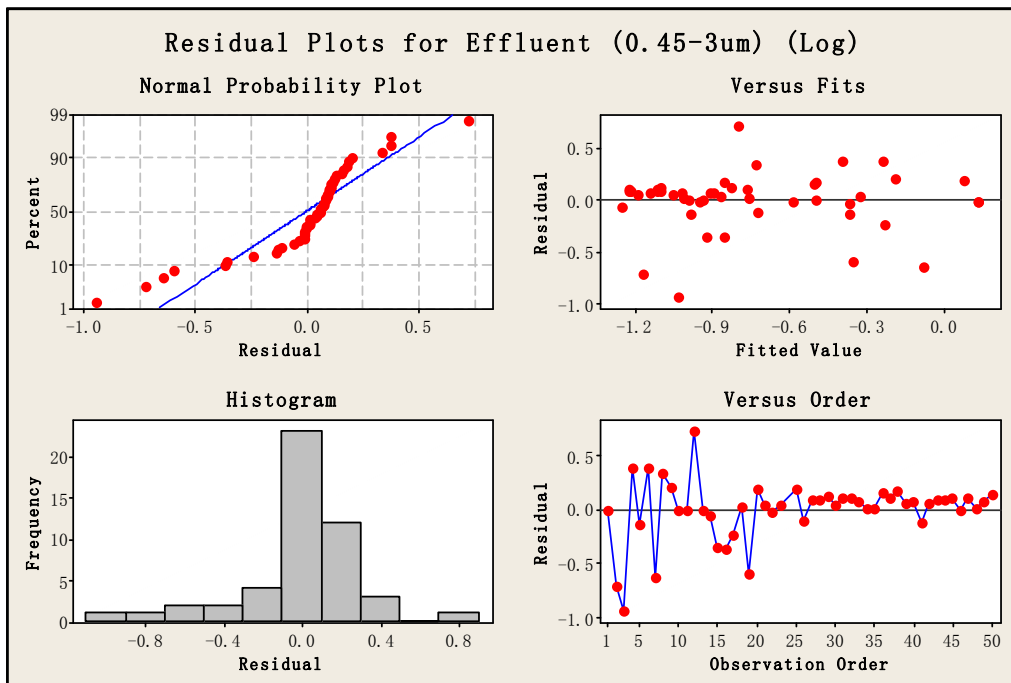

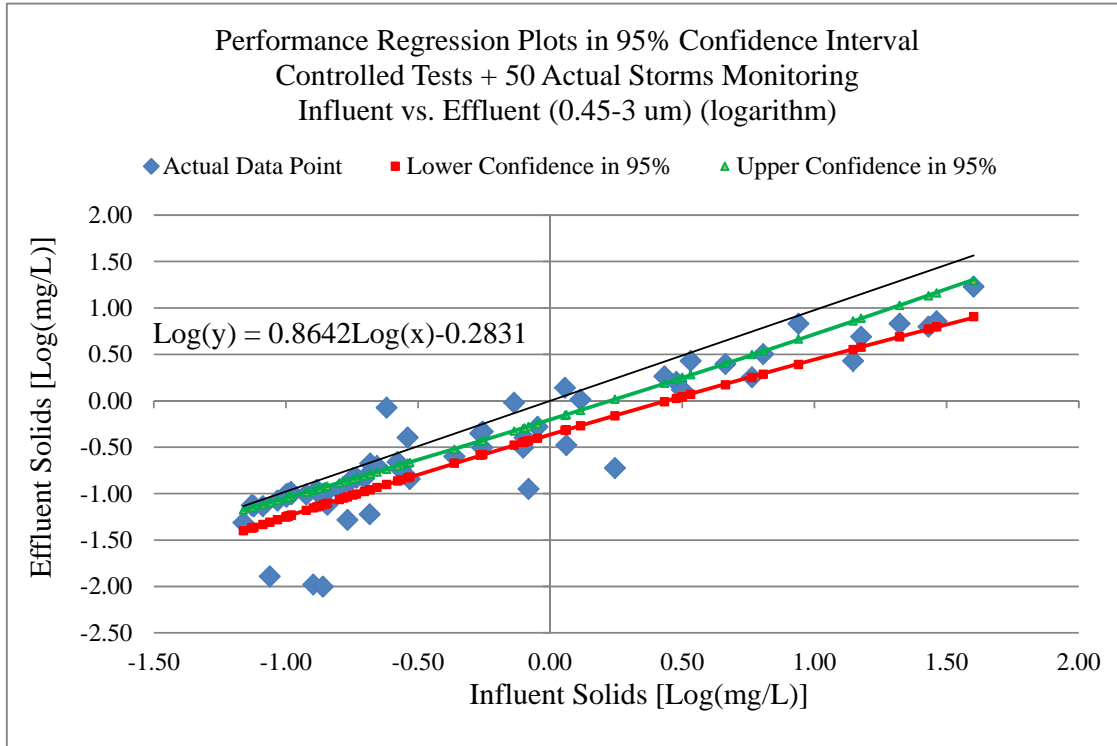

SUMMARY OUTPUT


Regression Statistics	
Multiple R	0.9191
R Square	0.8447
Adjusted R Square	0.8422
Standard Error	0.2916
Observations	62

ANOVA					
	df	SS	MS	F	Significance F
Regression	1	27.7644	27.7644	326.4502	0.0000
Residual	60	5.1030	0.0850		
Total	61	32.8674			


	Coefficients	Standard Error	t Stat	P-value	Lower 95%	Upper 95%	Lower 95.0%	Upper 95.0%
Intercept	-0.2831	0.0392	-7.2255	0.0000	-0.3615	-0.2047	-0.3615	-0.2047
X Variable 1	0.8642	0.0478	18.0679	0.0000	0.7685	0.9599	0.7685	0.9599

Residual Plots for Effluent (0.45-3um) (ctrl+50) (Log)


Normal Probability Plot

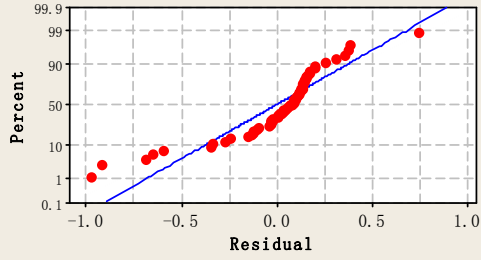


Versus Fits

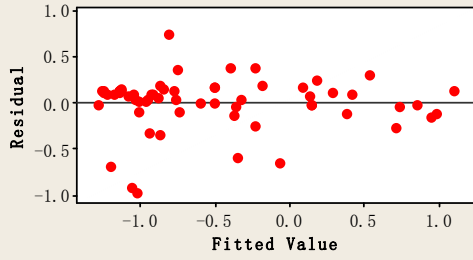

Histogram

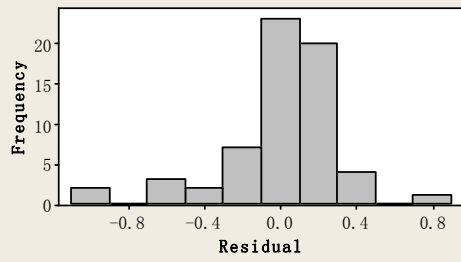

Versus Order

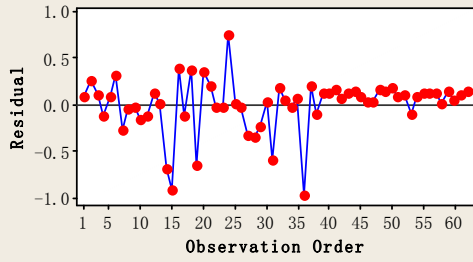

Appendix A.3: Regression and ANOVA Performance Comparison for 3-12 μ m Solids


Controlled Sediment Test

SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	1.00
R Square	0.99
Adjusted R Square	0.90
Standard Error	0.13
Observations	12.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	19.31	19.31	1160.19	0.00
Residual	11	0.18	0.02		
Total	12	19.50			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.77	0.02	34.06	0.00	0.72	0.82	0.72	0.82

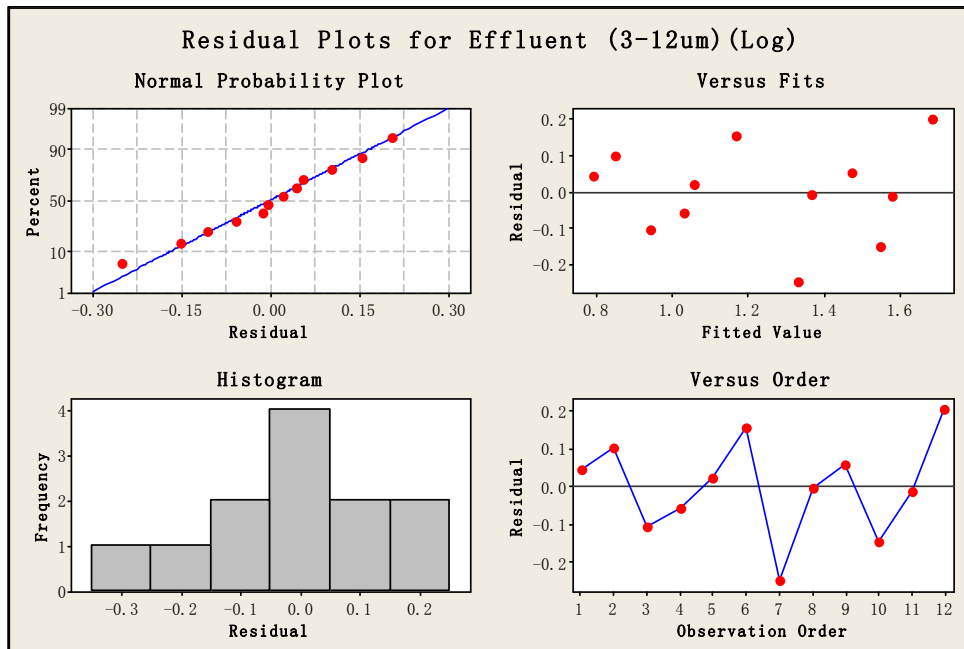



SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.64
R Square	0.40
Adjusted R Square	0.38
Standard Error	0.46
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	7.04	7.04	33.19	0.00
Residual	49	10.39	0.21		
Total	50	17.42			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.40	0.07	5.76	0.00	0.26	0.53	0.26	0.53

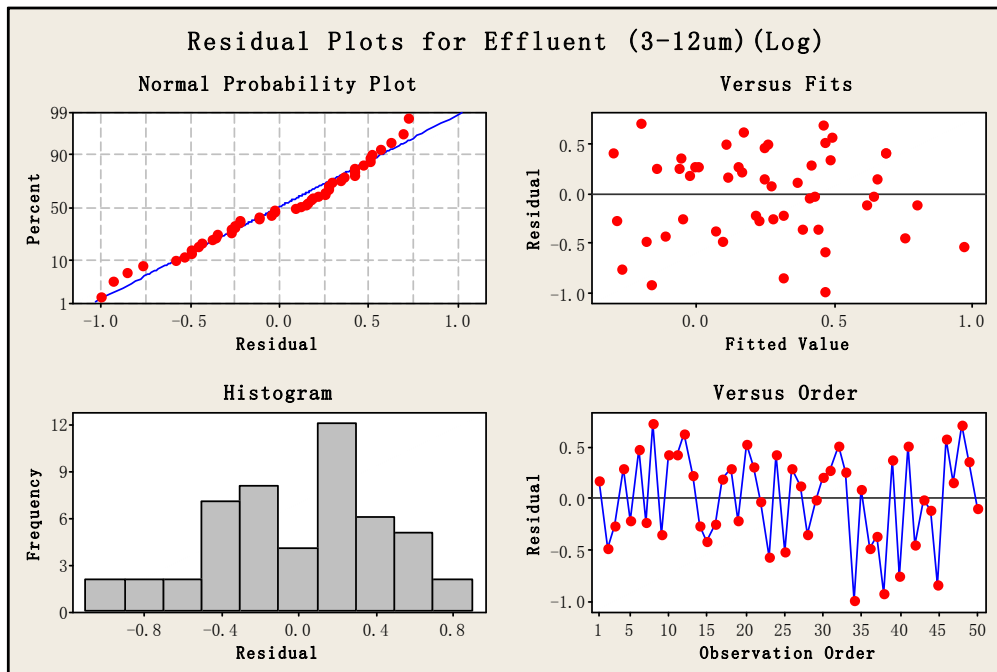

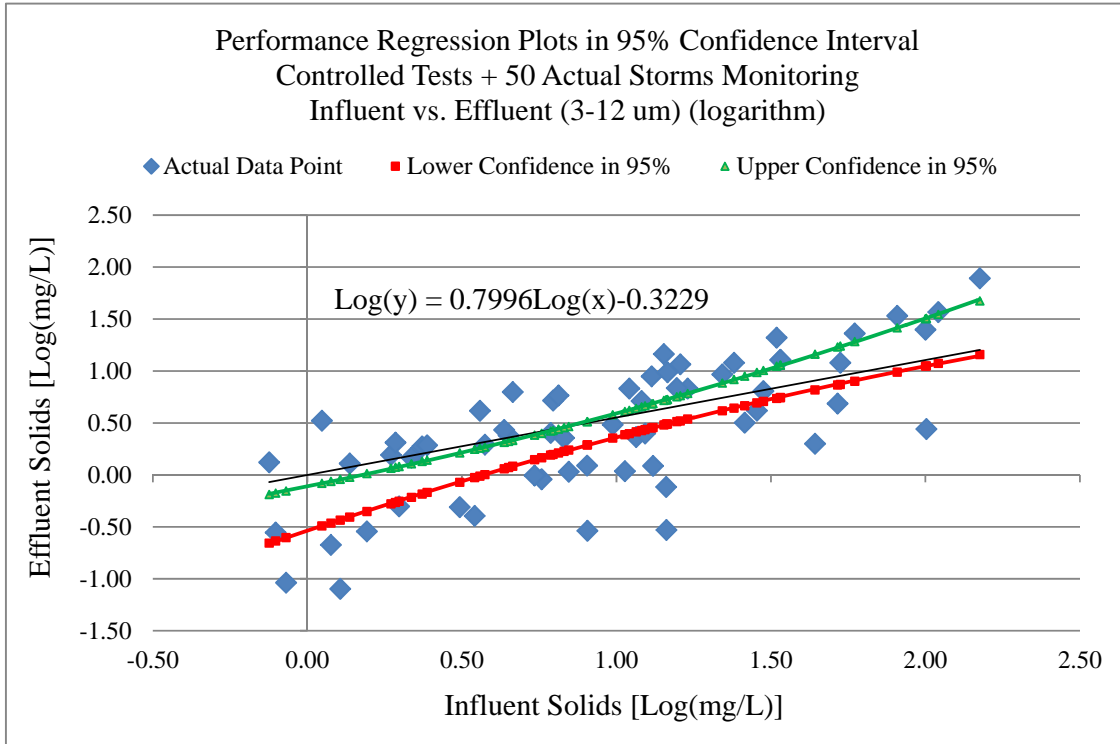

SUMMARY OUTPUT


<i>Regression Statistics</i>	
Multiple R	0.7349
R Square	0.5400
Adjusted R Square	0.5324
Standard Error	0.4372
Observations	62

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	13.4632	13.4632	70.4427	0.0000
Residual	60	11.4674	0.1911		
Total	61	24.9306			


	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.3229	0.1065	-3.0321	0.0036	-0.5358	-0.1099	-0.5358	-0.1099
X Variable 1	0.7996	0.0953	8.3930	0.0000	0.6090	0.9902	0.6090	0.9902

Residual Plots for Effluent (3-12um) (ctrl+50) (Log)


Normal Probability Plot

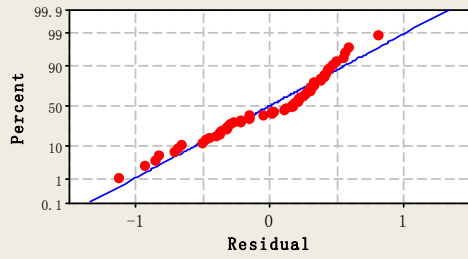


Versus Fits

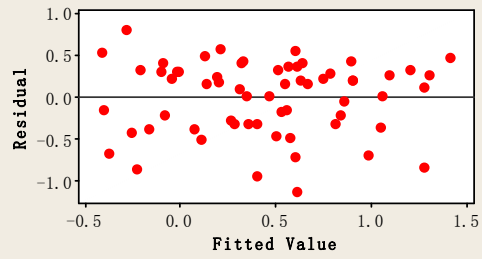

Histogram

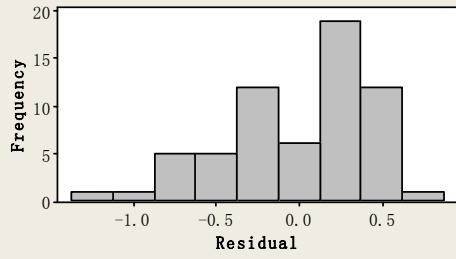

Versus Order

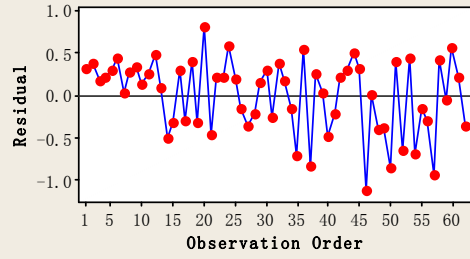

Appendix A.4: Regression and ANOVA Performance Comparison for 12-30 μ m Solids


Controlled Sediment Test

SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.97
R Square	0.95
Adjusted R Square	0.86
Standard Error	0.27
Observations	12.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	14.67	14.67	203.93	0.00
Residual	11	0.79	0.07		
Total	12	15.46			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.64	0.04	14.28	0.00	0.54	0.74	0.54	0.74

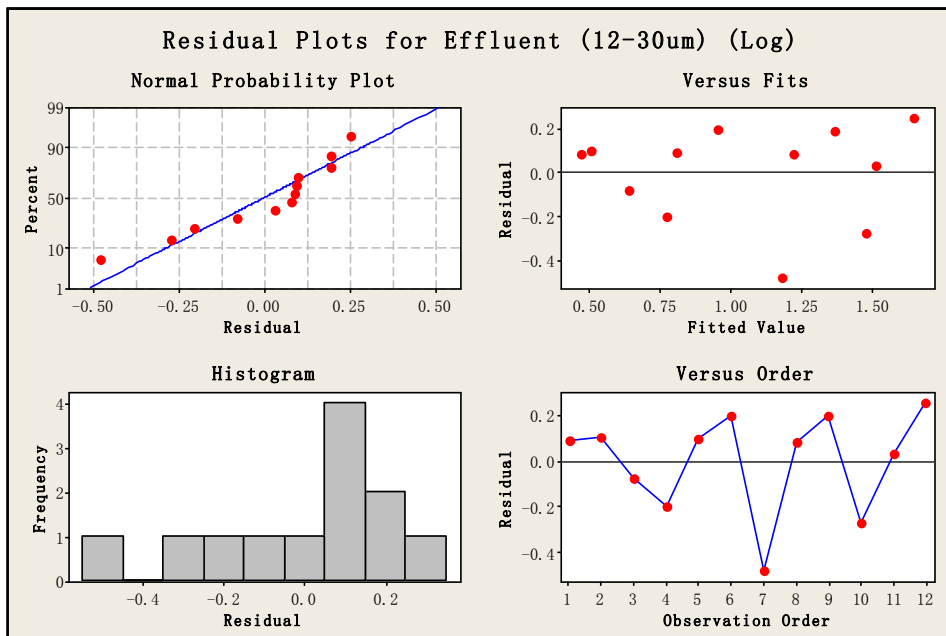



SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.91
R Square	0.82
Adjusted R Square	0.80
Standard Error	0.32
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	23.59	23.59	226.22	0.00
Residual	49	5.11	0.10		
Total	50	28.70			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.54	0.04	15.04	0.00	0.47	0.61	0.47	0.61

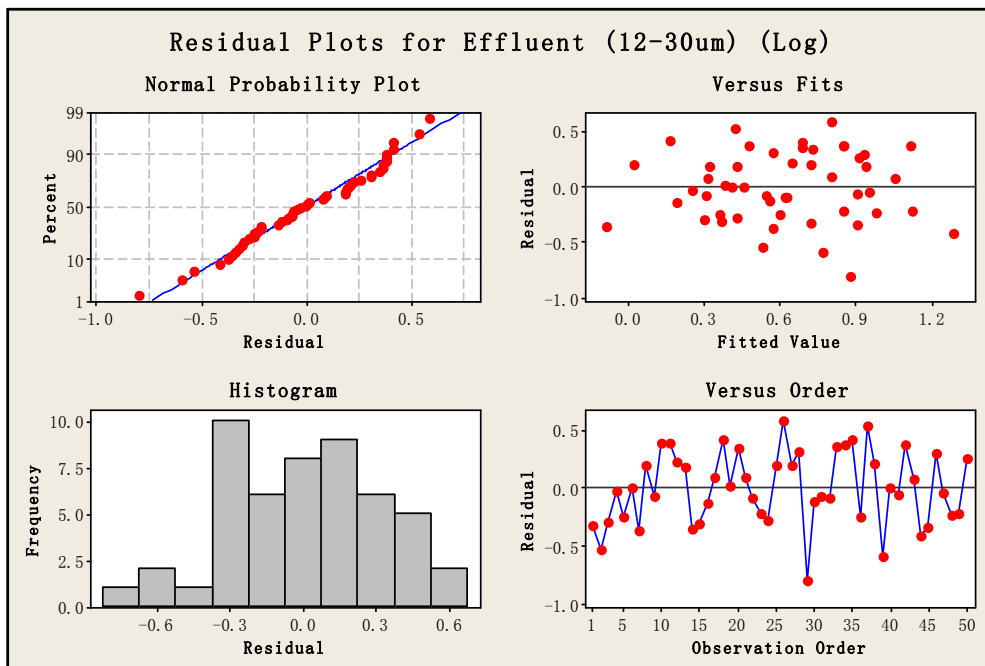

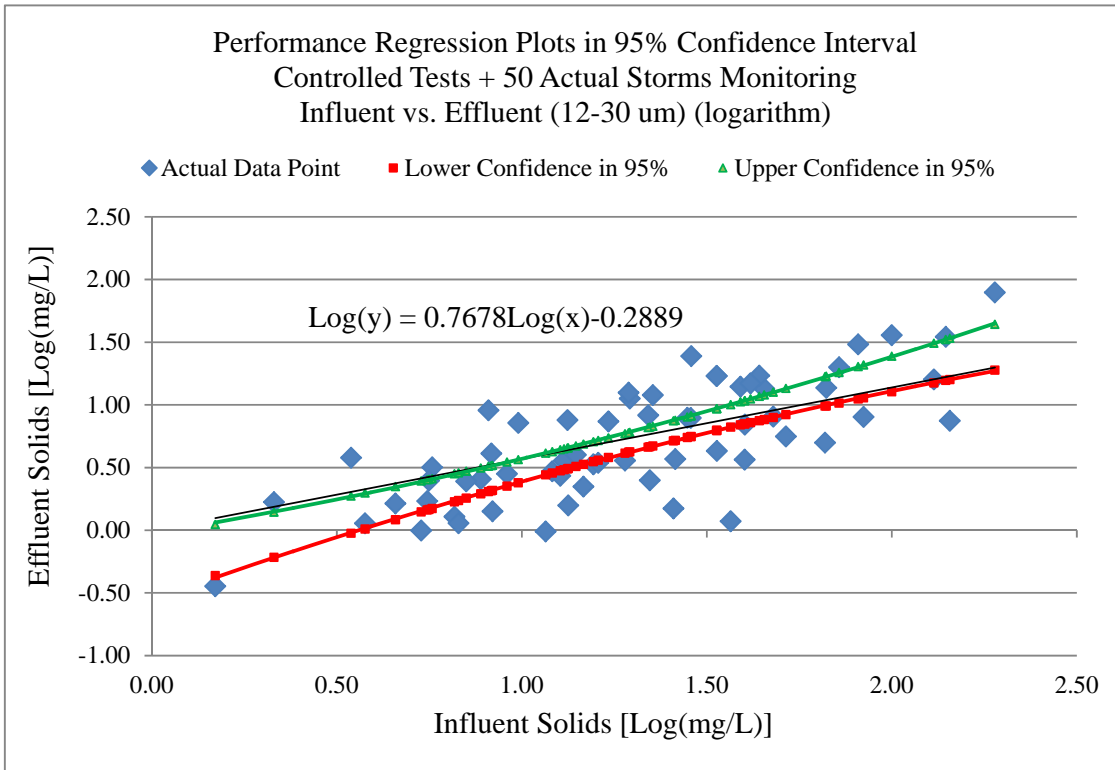

SUMMARY OUTPUT


<i>Regression Statistics</i>	
Multiple R	0.7631
R Square	0.5823
Adjusted R Square	0.5753
Standard Error	0.3047
Observations	62

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	7.7669	7.7669	83.6365	0.0000
Residual	60	5.5719	0.0929		
Total	61	13.3389			


	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.2889	0.1154	-2.5039	0.0150	-0.5197	-0.0581	-0.5197	-0.0581
X Variable 1	0.7678	0.0840	9.1453	0.0000	0.5999	0.9357	0.5999	0.9357

Residual Plots for Effluent (12-30um) (ctrl+50) (Log)


Normal Probability Plot

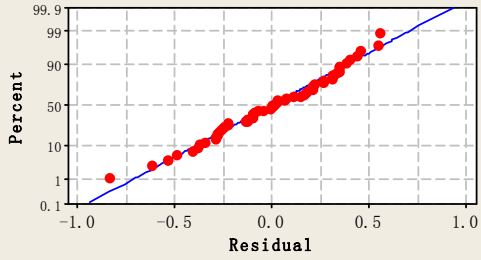


Versus Fits

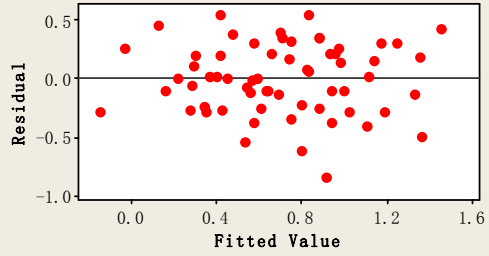

Histogram

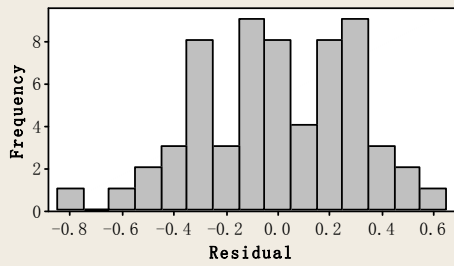

Versus Order

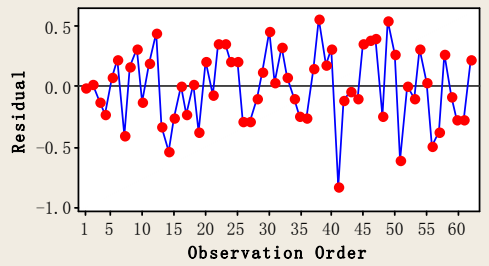

Appendix A.5: Regression and ANOVA Performance Comparison for 30-60 μ m Solids


Controlled Sediment Test

SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.93
R Square	0.86
Adjusted R Square	0.77
Standard Error	0.32
Observations	12.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	6.65	6.65	65.36	0.00
Residual	11	1.12	0.10		
Total	12	7.77			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.51	0.06	8.08	0.00	0.37	0.65	0.37	0.65

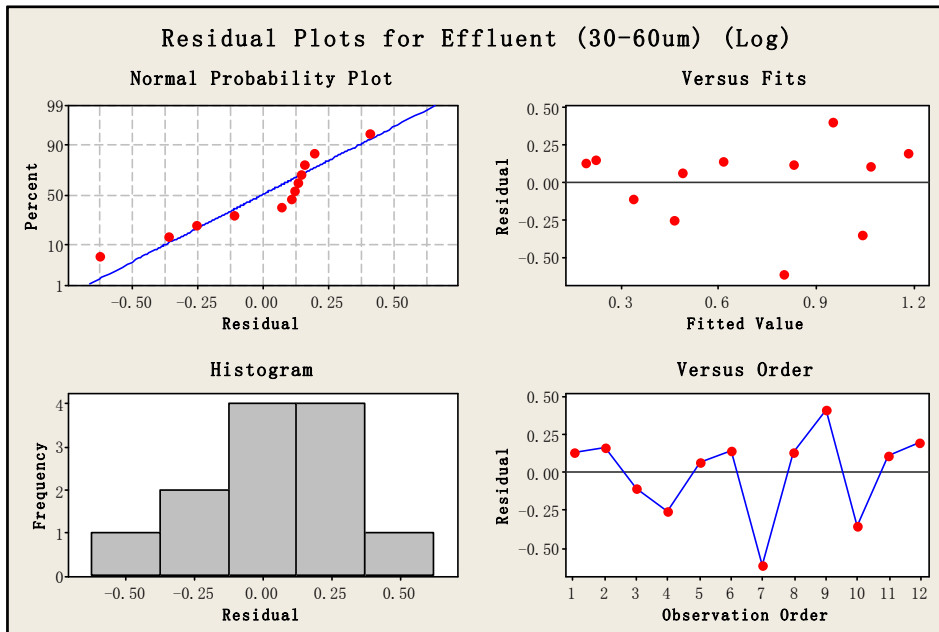


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.66
R Square	0.44
Adjusted R Square	0.43
Standard Error	0.42
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	6.50	6.50	37.61	0.00
Residual	48	8.29	0.17		
Total	49	14.79			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.39	0.14	-2.76	0.01	-0.68	-0.11	-0.68	-0.11
X Variable 1	0.86	0.14	6.13	0.00	0.58	1.14	0.58	1.14

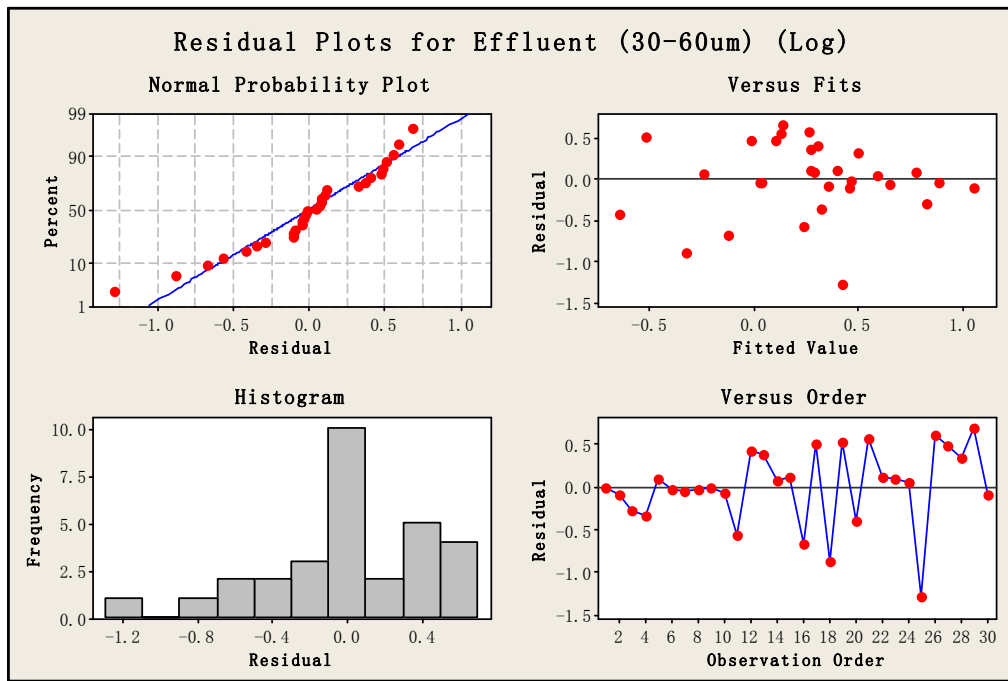



SUMMARY OUTPUT


Regression Statistics	
Multiple R	0.6890
R Square	0.4748
Adjusted R Square	0.4660
Standard Error	0.3943
Observations	62

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	8.4317	8.4317	54.2390	0.0000
Residual	60	9.3273	0.1555		
Total	61	17.7590			


	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.3663	0.1220	-3.0017	0.0039	-0.6104	-0.1222	-0.6104	-0.1222
X Variable 1	0.8084	0.1098	7.3647	0.0000	0.5888	1.0280	0.5888	1.0280

Residual Plots for Effluent (30-60um) (ctrl+50) (Log)


Normal Probability Plot

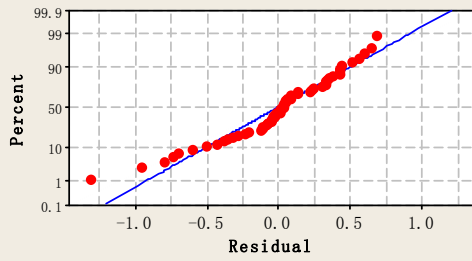


Versus Fits

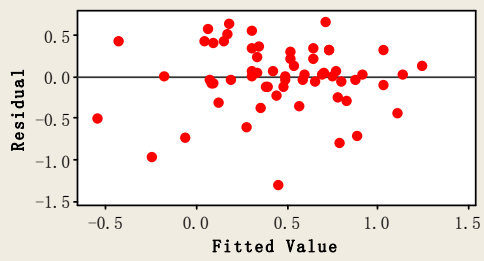

Histogram

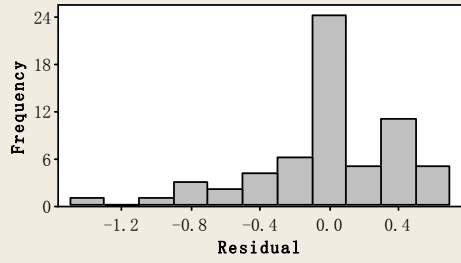

Versus Order

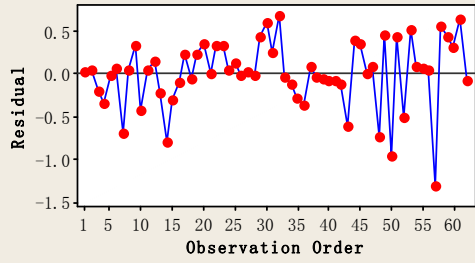

Appendix A.6: Regression and ANOVA Performance Comparison for 60-120 μ m Solids


Controlled Sediment Test

SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.63
R Square	0.39
Adjusted R Square	0.33
Standard Error	0.31
Observations	12.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	0.61	0.61	6.47	0.03
Residual	10	0.94	0.09		
Total	11	1.55			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.39	0.15	-2.66	0.02	-0.72	-0.06	-0.72	-0.06
X Variable 1	0.60	0.23	2.54	0.03	0.07	1.12	0.07	1.12

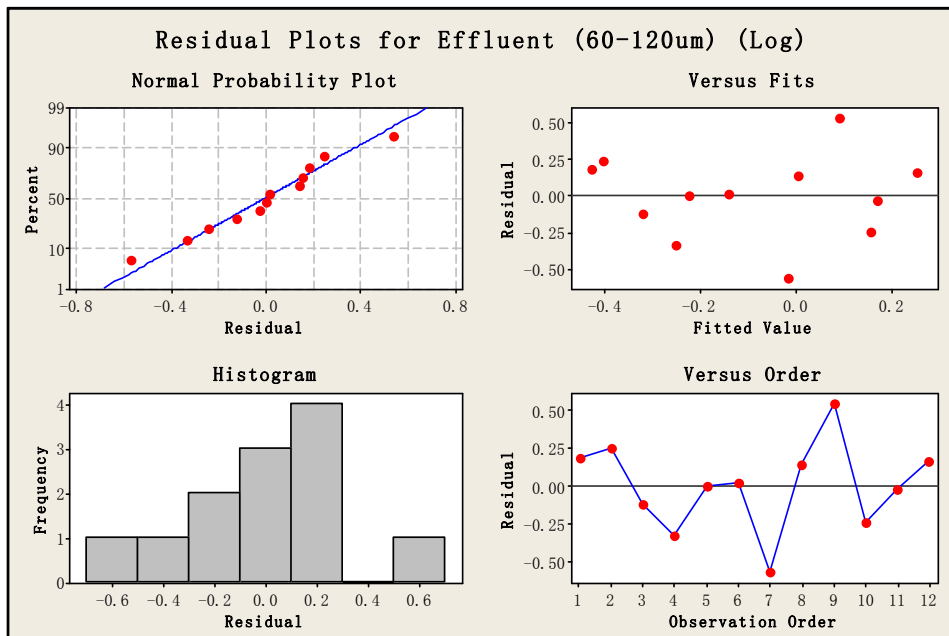



SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.58
R Square	0.33
Adjusted R Square	0.32
Standard Error	0.49
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	5.87	5.87	24.09	0.00
Residual	48	11.70	0.24		
Total	49	17.58			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.40	0.13	-2.99	0.00	-0.66	-0.13	-0.66	-0.13
X Variable 1	0.74	0.15	4.91	0.00	0.44	1.04	0.44	1.04

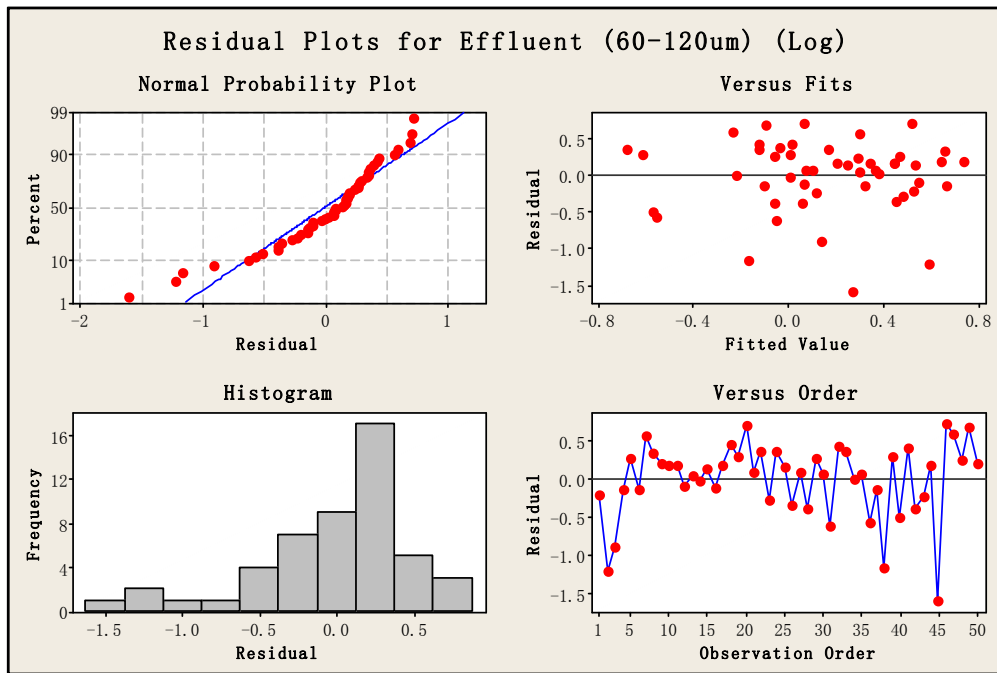

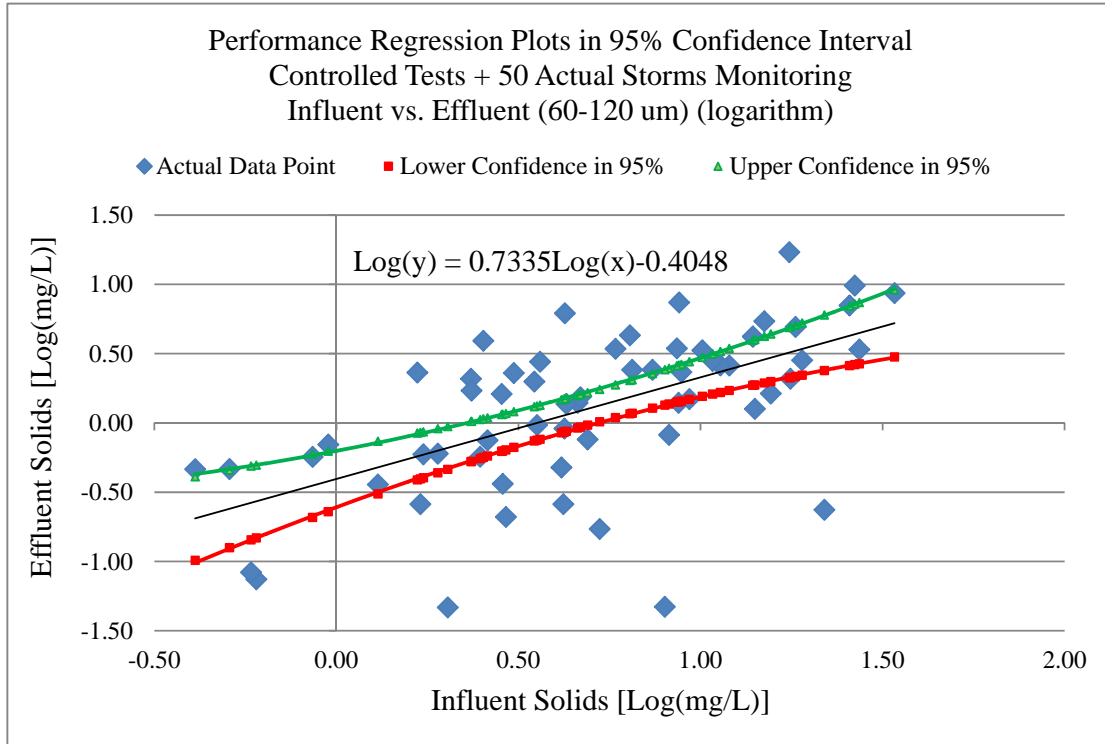

SUMMARY OUTPUT


<i>Regression Statistics</i>	
Multiple R	0.5963
R Square	0.3555
Adjusted R Square	0.3448
Standard Error	0.4604
Observations	62

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	7.0149	7.0149	33.0989	0.0000
Residual	60	12.7163	0.2119		
Total	61	19.7312			


	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.4048	0.1068	-3.7897	0.0004	-0.6184	-0.1911	-0.6184	-0.1911
X Variable 1	0.7335	0.1275	5.7532	0.0000	0.4785	0.9886	0.4785	0.9886

Residual Plots for Effluent (60-120um) (ctrl+50) (Log)


Normal Probability Plot

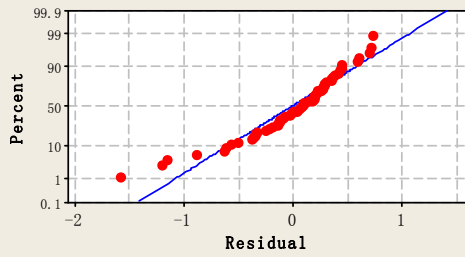


Versus Fits

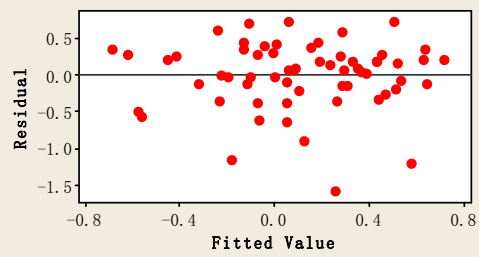

Histogram

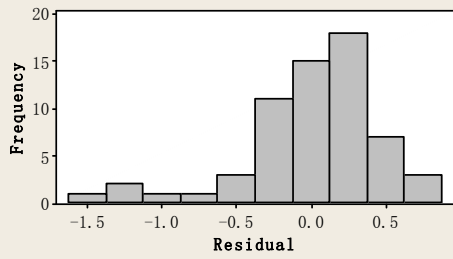

Versus Order

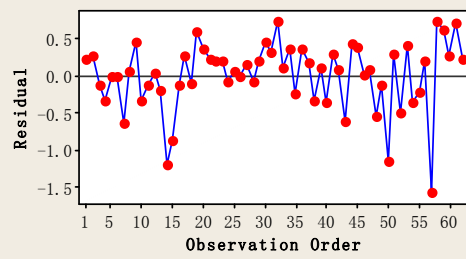

Appendix A.7: Regression and ANOVA Performance Comparison for 250-1180 μm Solids


Actual Storms Monitoring (50 sampled storms)


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.77
R Square	0.60
Adjusted R Square	0.58
Standard Error	0.41
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	12.31	12.31	72.48	0.00
Residual	49	8.32	0.17		
Total	50	20.63			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.29	0.03	8.51	0.00	0.22	0.35	0.22	0.35

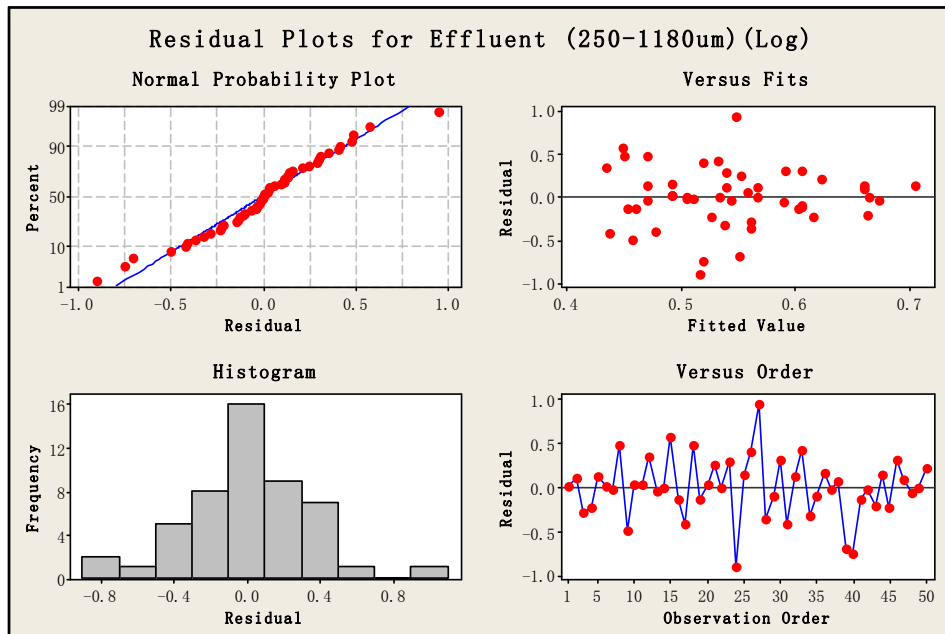

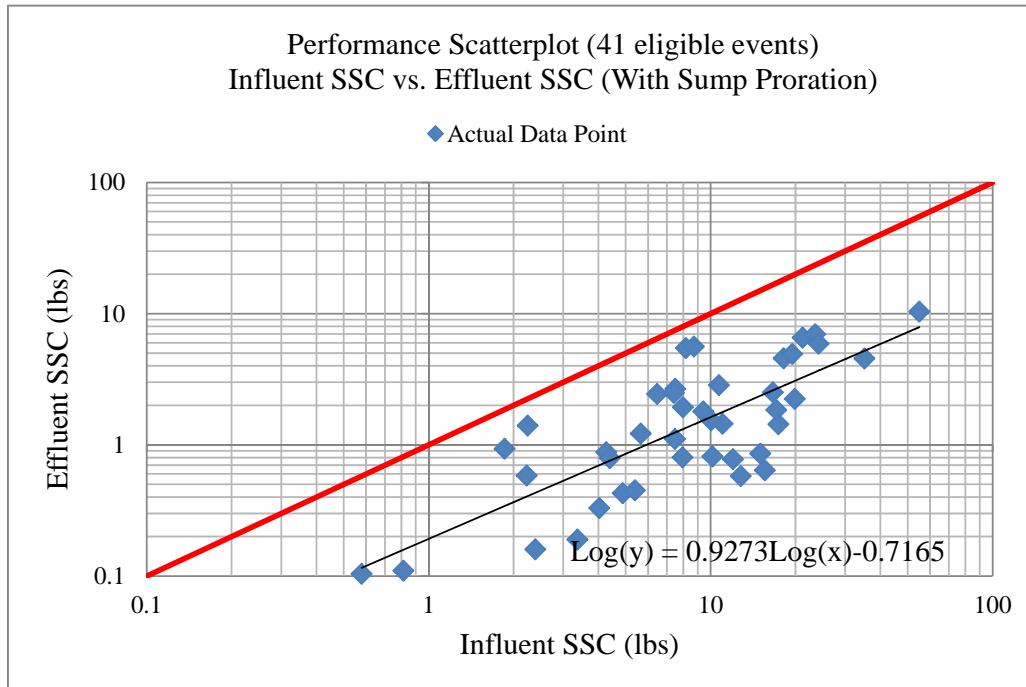


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.7724
R Square	0.5967
Adjusted R Square	0.5863
Standard Error	0.3195
Observations	41

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	5.8894	5.8894	57.6922	0.0000
Residual	39	3.9812	0.1021		
Total	40	9.8706			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.7165	0.1215	-5.8986	0.0000	-0.9622	-0.4708	-0.9622	-0.4708
X Variable 1	0.9273	0.1221	7.5955	0.0000	0.6804	1.1742	0.6804	1.1742

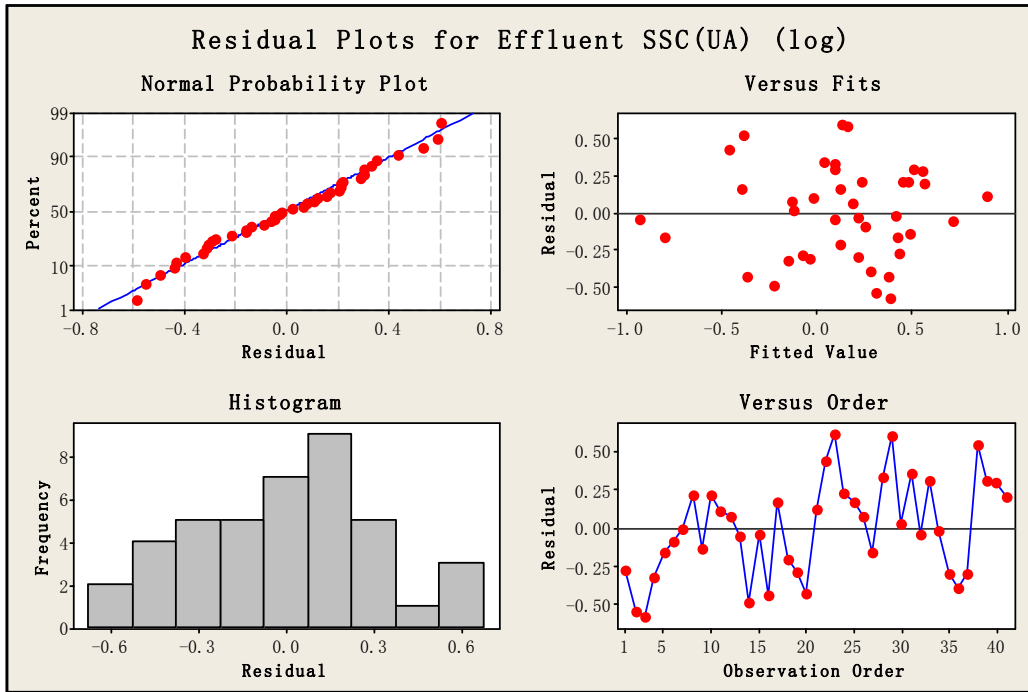

Wilcoxon Signed Rank Test


Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	25%	75%
Influent SSC(UA)	41	0	8.73	4.634	16.864
Effluent SSC(UA)	41	0	1.44	0.71	2.767

W= -861.000 T+ = 0.000 T- = -861.000
 Z-Statistic (based on positive ranks) = -5.579
 (P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix B.2: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load 0.45-3 µm Solids

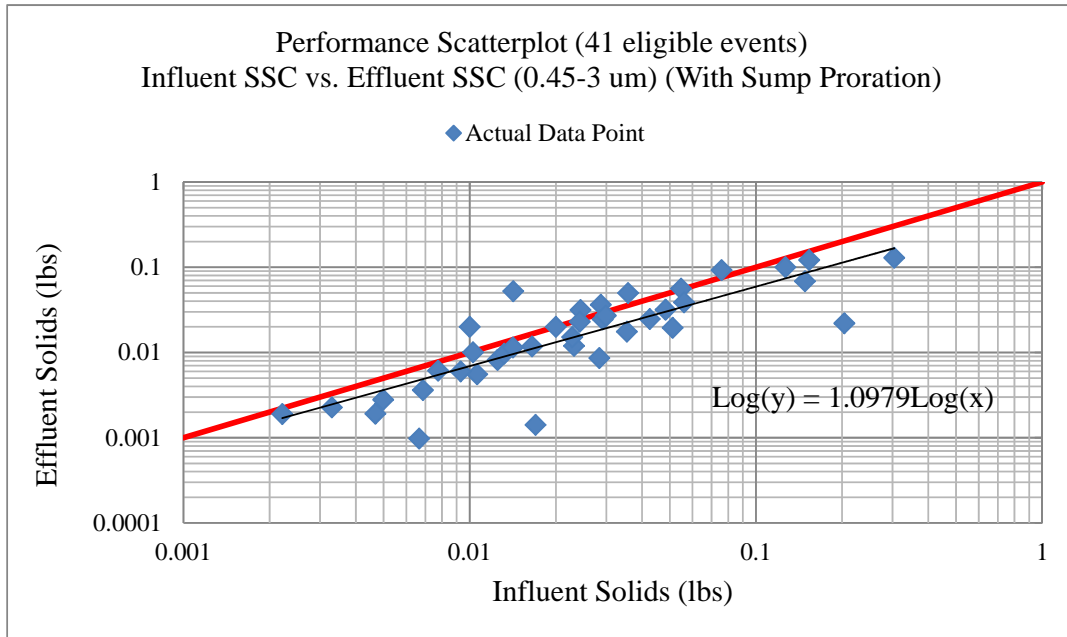


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.9866
R Square	0.9734
Adjusted R Square	0.9471
Standard Error	0.3139
Observations	39

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	137.1543	137.1543	1392.2962	0.0000
Residual	38	3.7434	0.0985		
Total	39	140.8977			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.0000	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	1.0979	0.0294	37.3135	0.0000	1.0383	1.1574	1.0383	1.1574

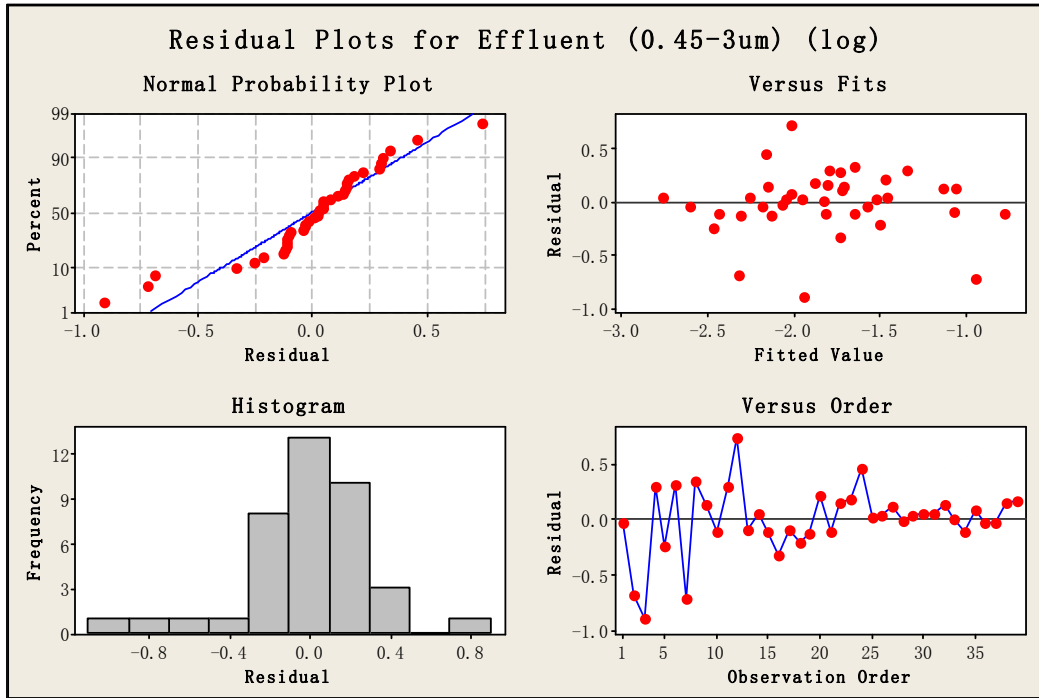

Wilcoxon Signed Rank Test


Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	25%	75%
Influent (0.45-3um)	39	0	0.0231	0.0103	0.0483
Effluent (0.45-3um)	39	0	0.0195	0.00612	0.0363

W= -439.000 T+ = 151.000 T- = -590.000
 Z-Statistic (based on positive ranks) = -3.183
 (P = 0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = 0.001).

Appendix B.3: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load 3-12 µm Solids

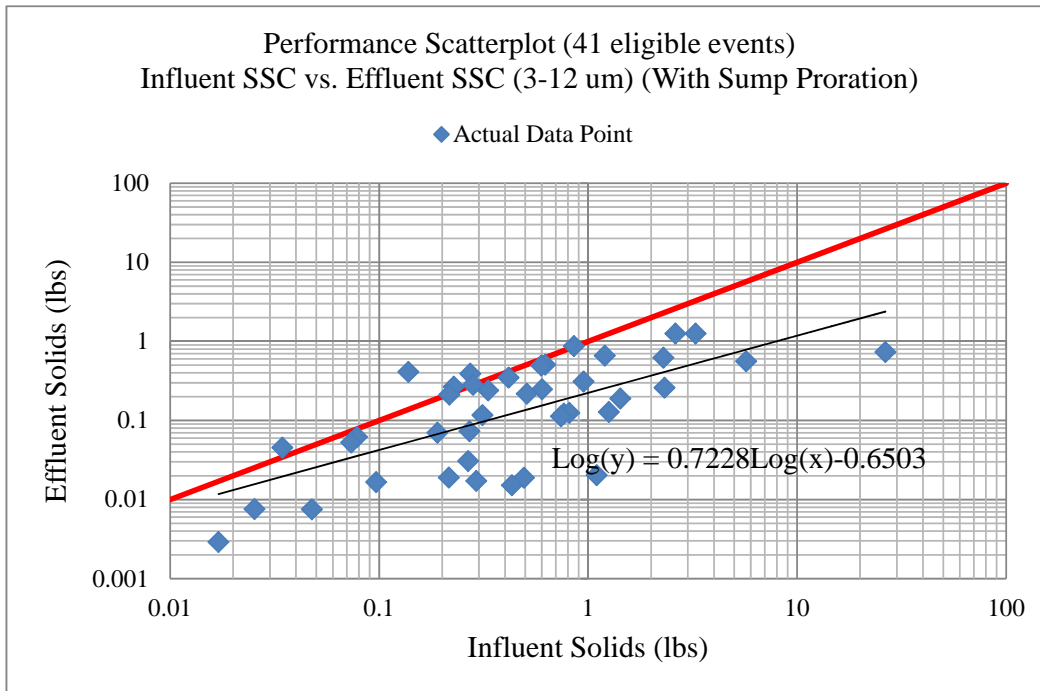


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.6896
R Square	0.4755
Adjusted R Square	0.4620
Standard Error	0.4899
Observations	41

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	8.4848	8.4848	35.3550	0.0000
Residual	39	9.3596	0.2400		
Total	40	17.8444			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.6503	0.0884	-7.3543	0.0000	-0.8292	-0.4715	-0.8292	-0.4715
X Variable 1	0.7228	0.1216	5.9460	0.0000	0.4770	0.9687	0.4770	0.9687

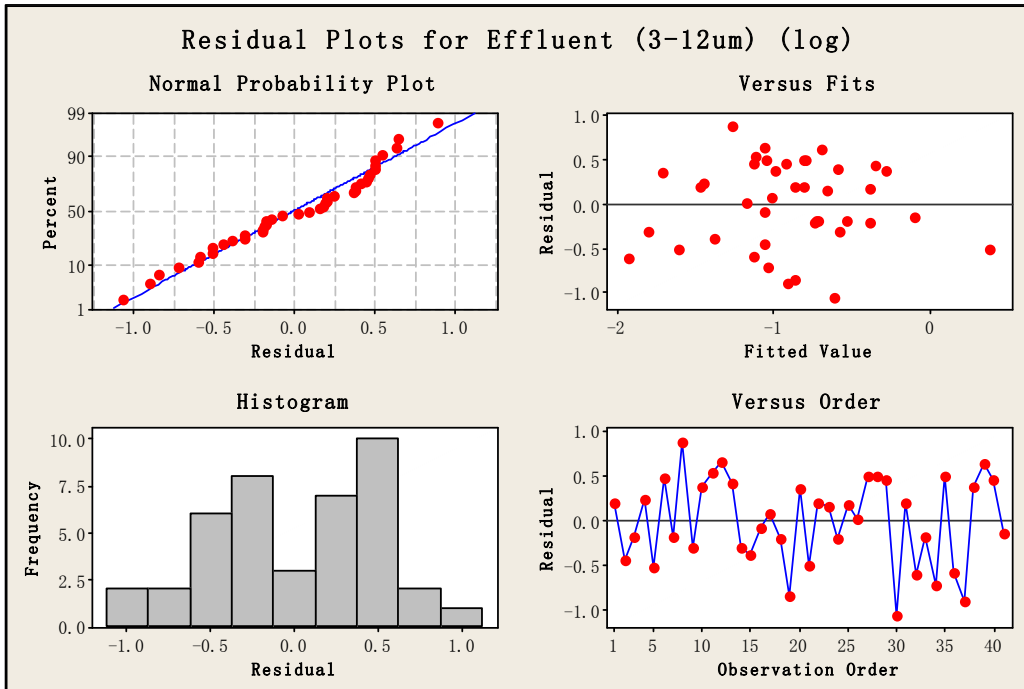

Wilcoxon Signed Rank Test


Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	25%	75%
Influent (3-12um)	41	0	0.431	0.216	1.024
Effluent (3-12um)	41	0	0.19	0.0381	0.401

W= -747.000 T+ = 57.000 T- = -804.000
 Z-Statistic (based on positive ranks) = -4.840
 ($P = < 0.001$)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference ($P = < 0.001$).

Appendix B.4: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load 12-30 μm Solids

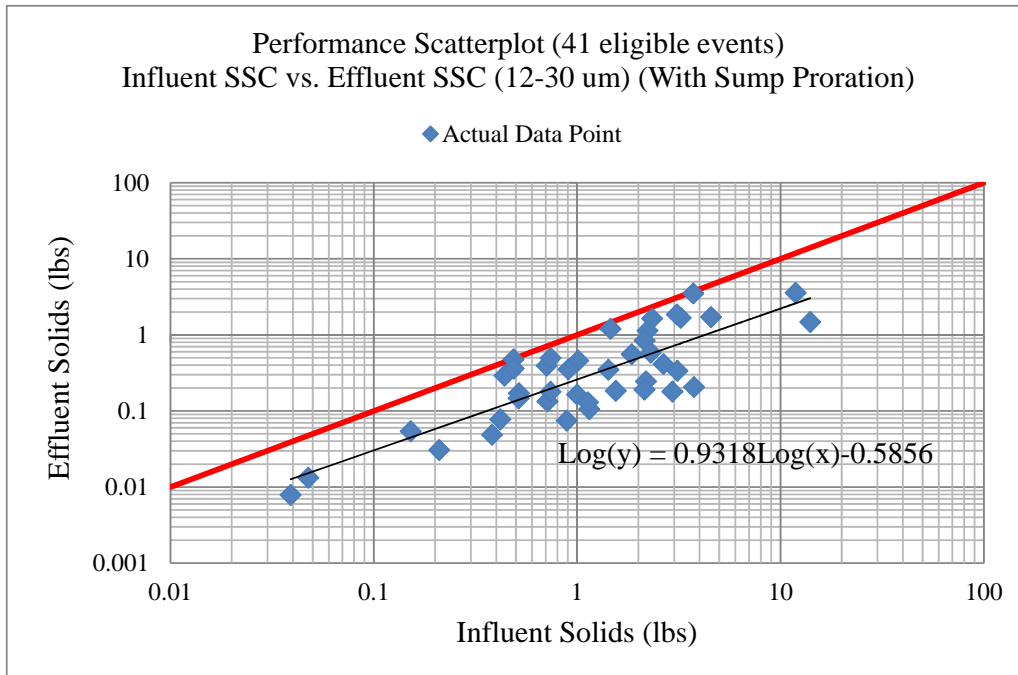


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.8227
R Square	0.6768
Adjusted R Square	0.6685
Standard Error	0.3455
Observations	41

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	9.7481	9.7481	81.6574	0.0000
Residual	39	4.6557	0.1194		
Total	40	14.4038			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.5856	0.0542	-10.7985	0.0000	-0.6953	-0.4759	-0.6953	-0.4759
X Variable 1	0.9318	0.1031	9.0365	0.0000	0.7232	1.1403	0.7232	1.1403

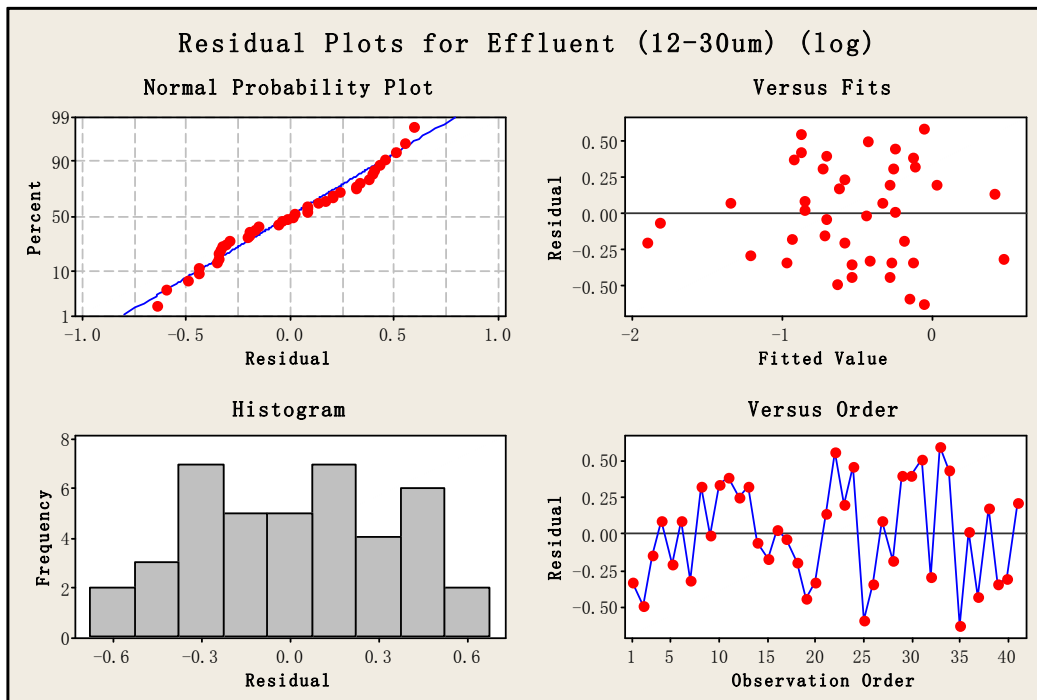

Wilcoxon Signed Rank Test


Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	25%	75%
Influent (12-30um)	41	0	1.146	0.516	2.498
Effluent (12-30um)	41	0	0.336	0.14	0.715

W= -861.000 T+ = 0.000 T- = -861.000
 Z-Statistic (based on positive ranks) = -5.579
 (P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix B.5: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load 30-60 µm Solids

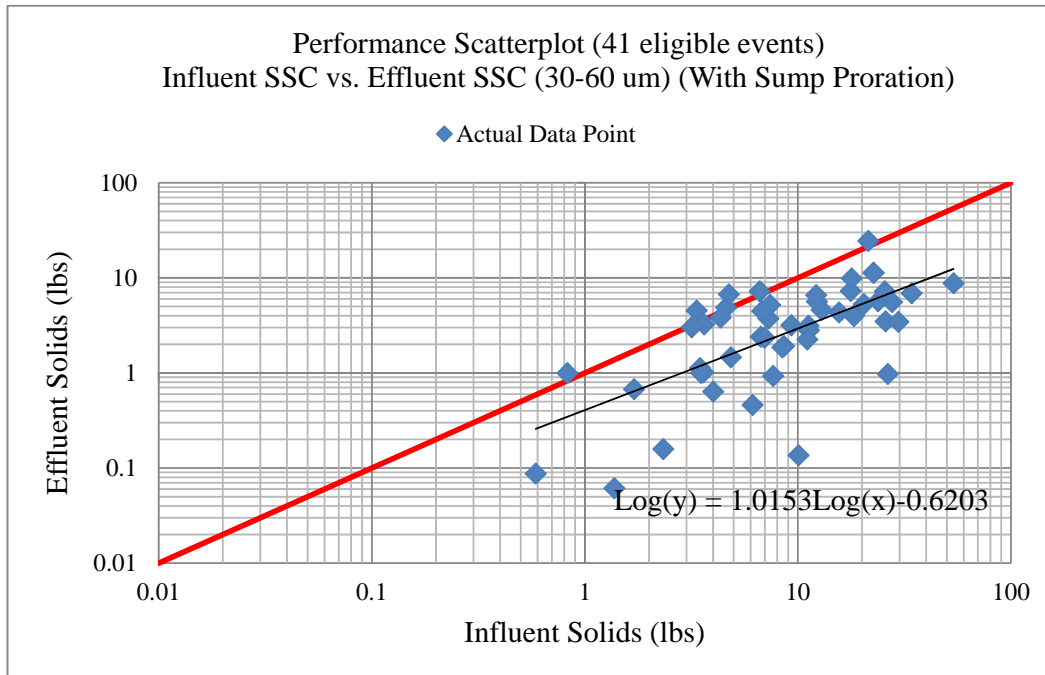


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.7744
R Square	0.5997
Adjusted R Square	0.5894
Standard Error	0.4277
Observations	41

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	10.6872	10.6872	58.4254	0.0000
Residual	39	7.1339	0.1829		
Total	40	17.8211			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.6203	0.0693	-8.9514	0.0000	-0.7604	-0.4801	-0.7604	-0.4801
X Variable 1	1.0153	0.1328	7.6437	0.0000	0.7467	1.2840	0.7467	1.2840

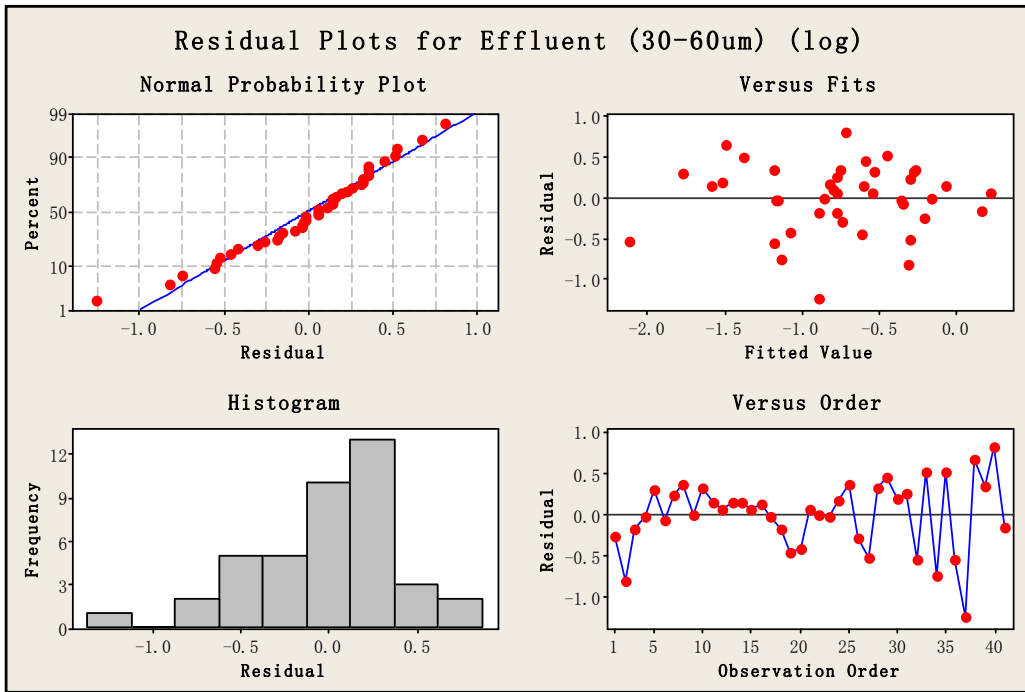

Wilcoxon Signed Rank Test


Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	25%	75%
Influent (30-60um)	41	0	0.732	0.302	1.934
Effluent (30-60um)	41	0	0.189	0.069	0.646

W= -823.000 T+ = 19.000 T- = -842.000
 Z-Statistic (based on positive ranks) = -5.332
 (P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix B.6: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load 60-120 µm Solids

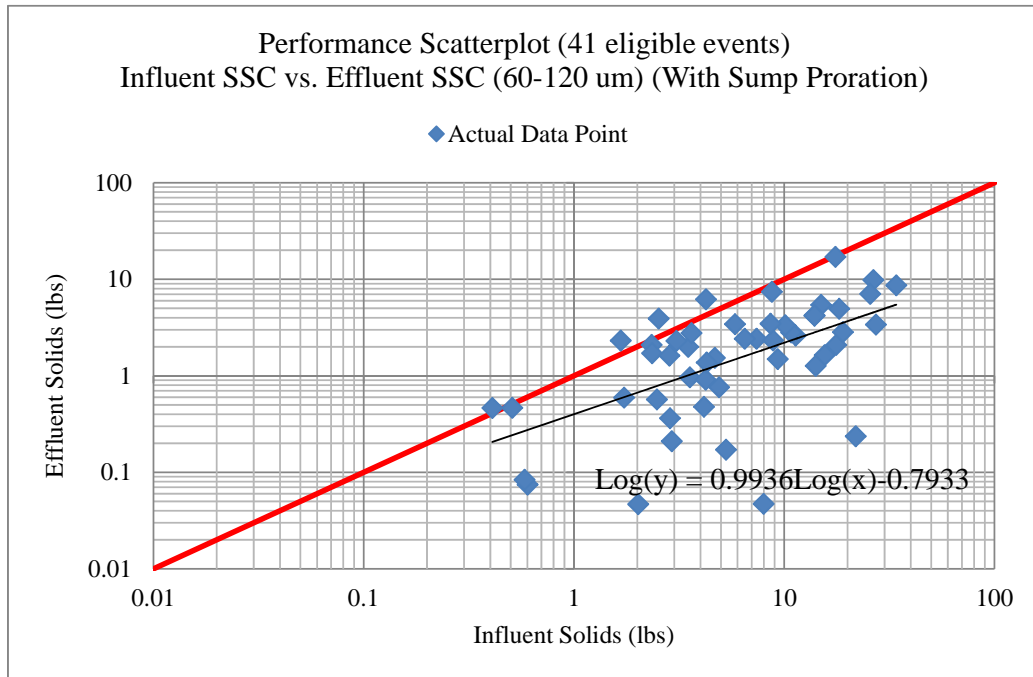


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.6638
R Square	0.4407
Adjusted R Square	0.4263
Standard Error	0.5386
Observations	41

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	8.9148	8.9148	30.7282	0.0000
Residual	39	11.3146	0.2901		
Total	40	20.2294			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.7933	0.0909	-8.7231	0.0000	-0.9772	-0.6093	-0.9772	-0.6093
X Variable 1	0.9936	0.1792	5.5433	0.0000	0.6311	1.3562	0.6311	1.3562

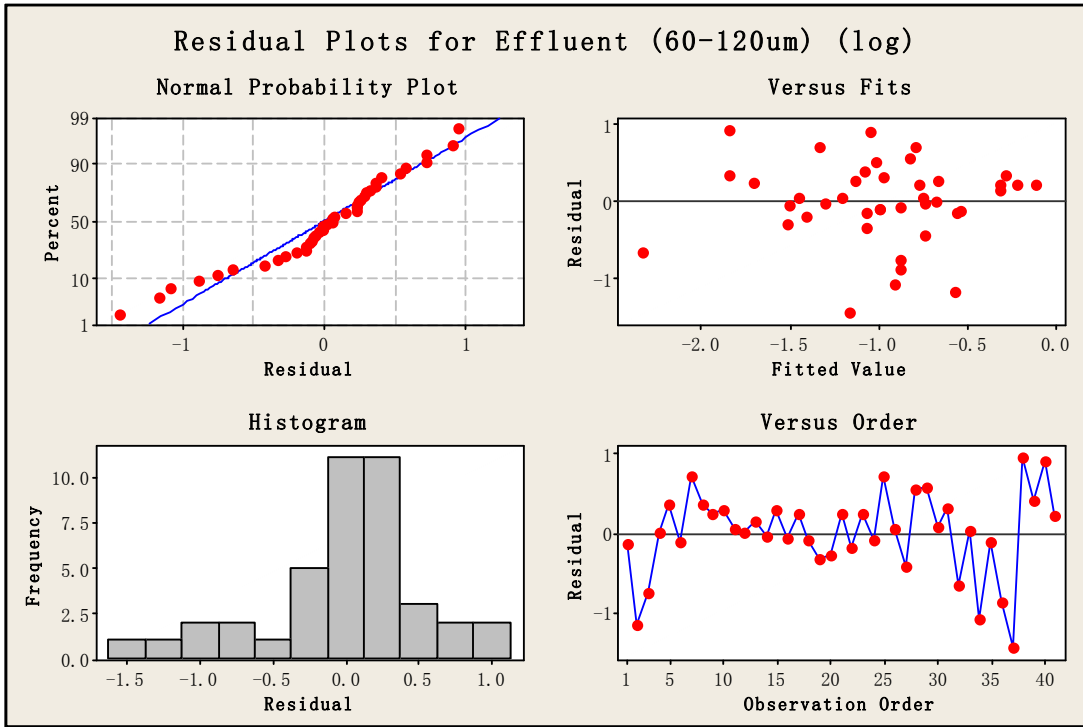

Wilcoxon Signed Rank Test


Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	25%	75%
Influent (60-120um)	41	0	0.665	0.346	1.224
Effluent (60-120um)	41	0	0.127	0.034	0.309

W= -839.000 T+ = 11.000 T- = -850.000
 Z-Statistic (based on positive ranks) = -5.436
 (P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix B.7: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load 120-250 μm Solids

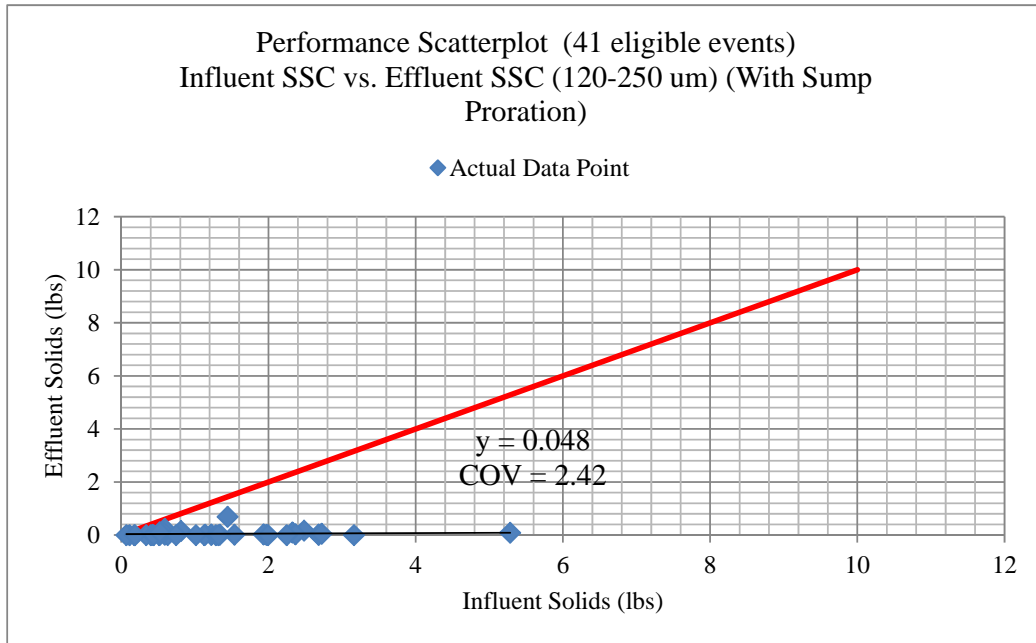

Wilcoxon Signed Rank Test

Normality Test
(Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	25%	75%
Influent (120-250 μm)	26	0	1.222	0.587	2.336
Effluent (120-250 μm)	26	0	0.0192	0.0112	0.104


W = -351.000 T₊ = 0.000 T₋ = -351.000

Z-Statistic (based on positive ranks) = -4.457

(P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix B.8: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load 250-1180 µm Solids

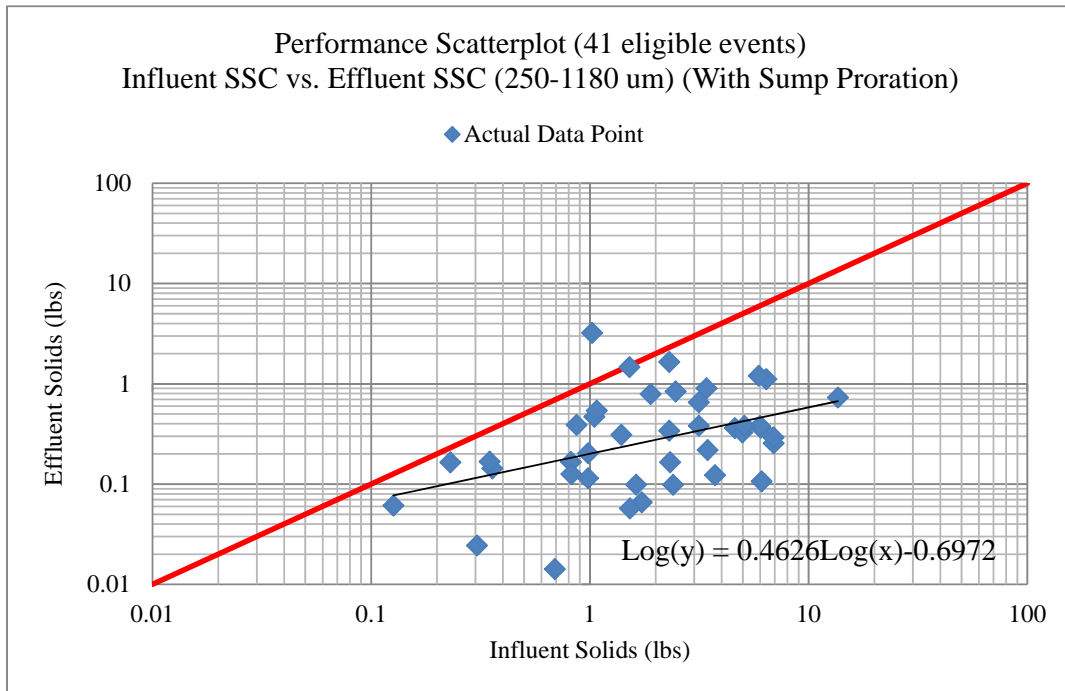


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.4322
R Square	0.1868
Adjusted R Square	0.1659
Standard Error	0.4483
Observations	41

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1	1.8001	1.8001	8.9570	0.0048
Residual	39	7.8378	0.2010		
Total	40	9.6379			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.6972	0.0818	-8.5227	0.0000	-0.8627	-0.5318	-0.8627	-0.5318
X Variable 1	0.4626	0.1546	2.9928	0.0048	0.1500	0.7753	0.1500	0.7753

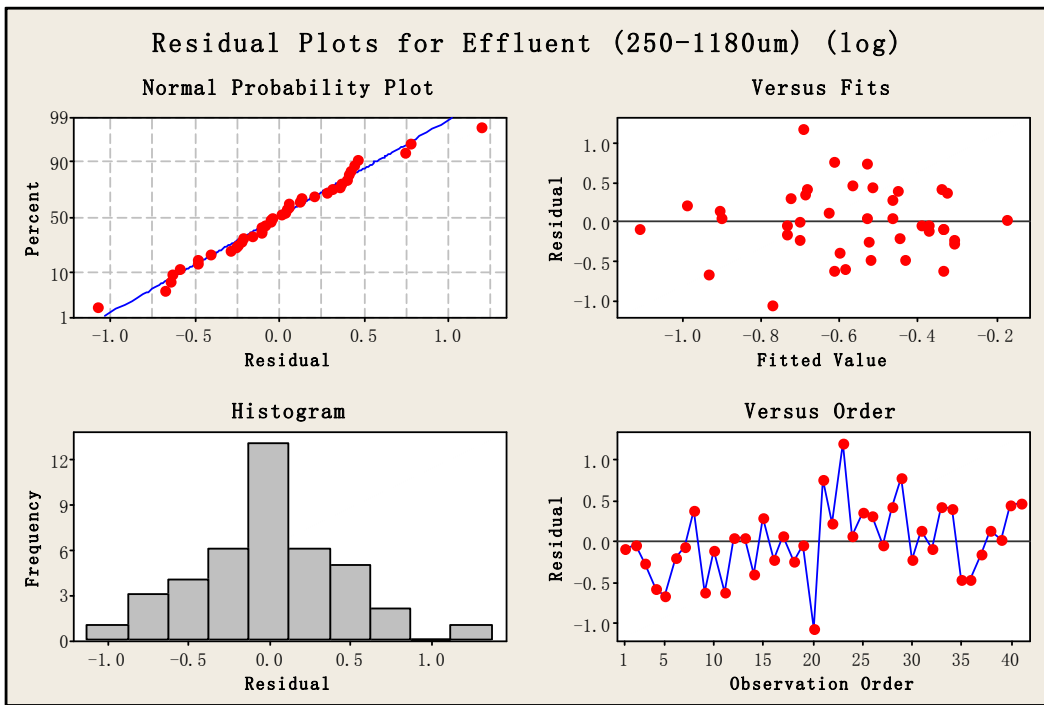

Wilcoxon Signed Rank Test


Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	25%	75%
Influent (250-1180um)	41	0	2.302	0.98	4.786
Effluent (250-1180um)	41	0	0.31	0.124	0.598

W= -813.000 T+ = 24.000 T- = -837.000
 Z-Statistic (based on positive ranks) = -5.268
 (P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix B.9: Summary of Regression, ANOVA and Hypothesis Analyses
for Sum-of-Load >1180 µm Solids

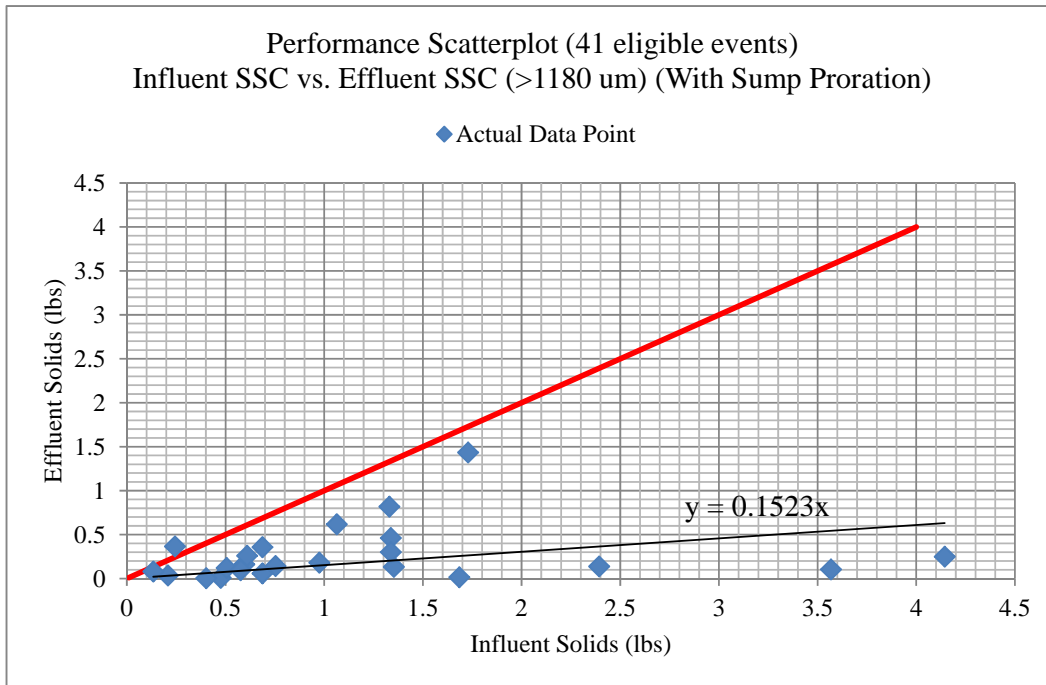


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.5625
R Square	0.3164
Adjusted R Square	0.2709
Standard Error	0.3509
Observations	23

ANOVA					
	df	SS	MS	F	Significance F
Regression	1	1.2539	1.2539	10.1810	0.0044
Residual	22	2.7095	0.1232		
Total	23	3.9633			

	Coefficients	Standard Error	t Stat	P-value	Lower 95%	Upper 95%	Lower 95.0%	Upper 95.0%
Intercept	0	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.1523	0.0477	3.1908	0.0042	0.0533	0.2513	0.0533	0.2513

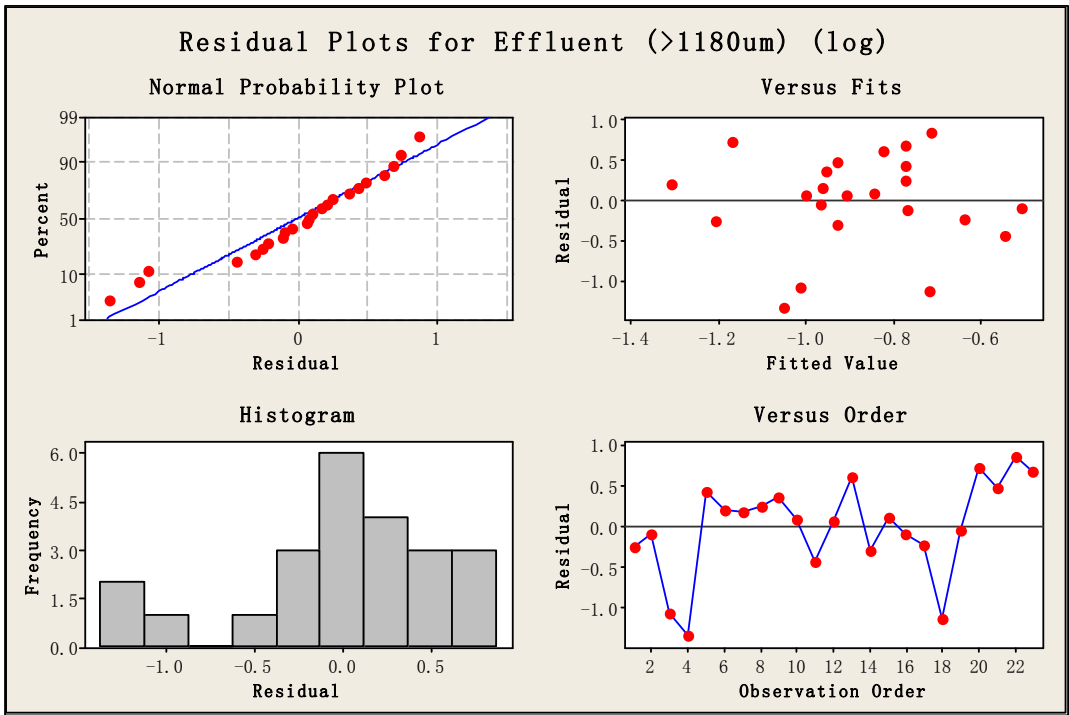

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk)


Failed (P < 0.050)

Group	N	Missing	Median	25%	75%
Influent (>1180um)	23	0	0.753	0.505	1.352
Effluent (>1180um)	23	0	0.144	0.079	0.357

W = -272.000 T+ = 2.000 T- = -274.000
 Z-Statistic (based on positive ranks) = -4.136
 (P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix C: August 13, 2012 Storm Event Summary

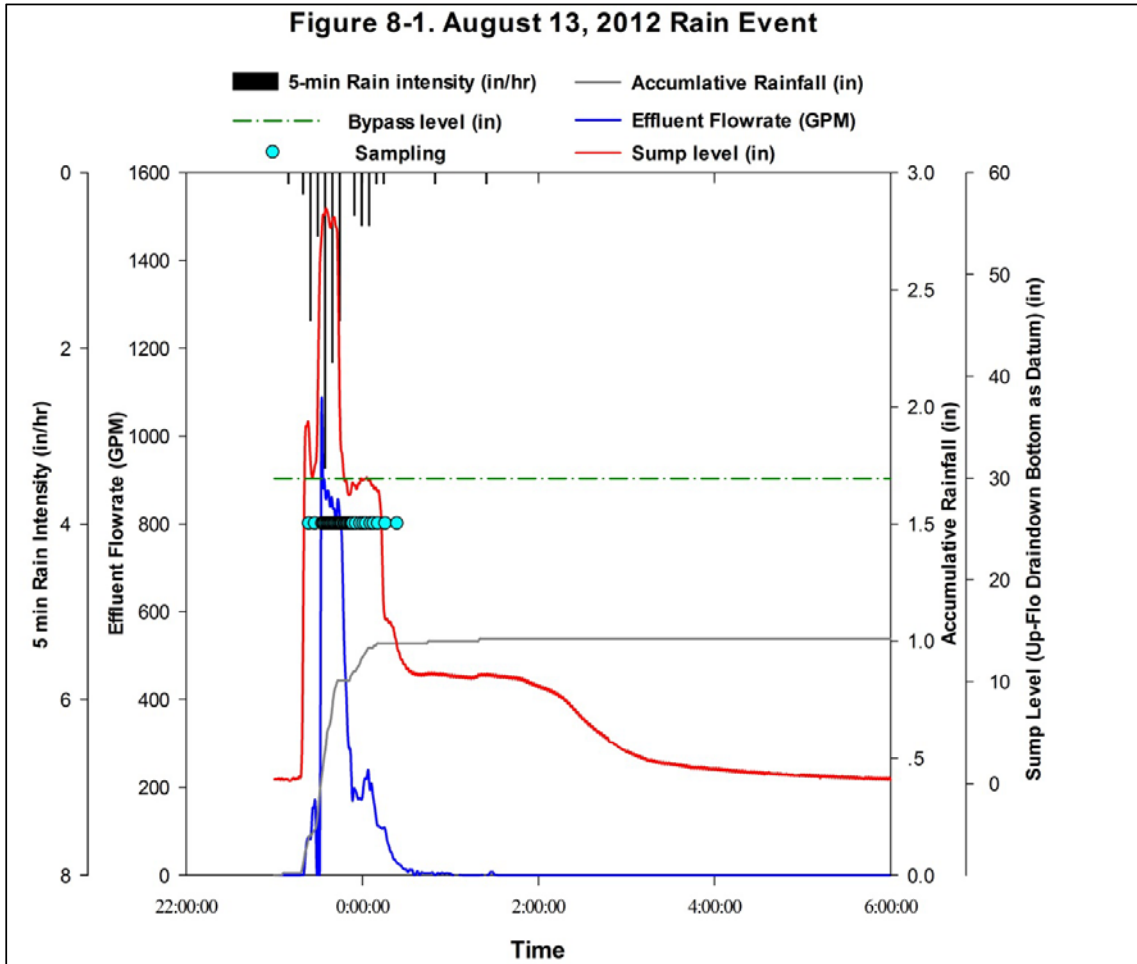

Note: The level Up-Flo Draindown is set as the datum which is also the lowest water elevation. The depth sensor in the sump is approximately 5.7 inches below this datum. The depth to the depth sensor is inspected periodically during site maintenance.

Table 8-1. Site Information	
Site Name:	Bama Belle Parking Deck
Location:	N(33°12'50") W(87°34'17")
Drainage Area (acres):	0.89
Percentage of Impervious area (%):	68
Runoff Curve Number (CN):	84
Rational Equation C Coefficient:	0.76
Volumetric Runoff Coefficient (Rv)	0.89

Table 8-2. August 13, 2012 Rain Event Characteristics Information			
	Goal	Actual Value	Note
Rain Event Start Date/Time:			2012/8/13 23:06
Rain Event End Date/Time:			2012/8/14 1:19
Total Precipitation (inch):	≥ 0.1	1.01	
Total Runoff Depth (inch):	NA	0.90	
Total Outflow (gallon):	NA	20903	
Rain Duration (hours):	≥ 1	2.22	
Flow Start Date/Time:			2012/8/13 23:21
Flow End Date/Time:			2012/8/14 1:29
Flow Duration (hours):	NA	2.13	
Average Rain Intensity (in/hr):	NA	0.45	
Average Runoff Rate (gallons/min):	NA	162	
Peak 5-min Rain Intensity (in/hr):	NA	3.36	
Peak Runoff Rate (gallons/min):	NA	1023	
Peak to Average Runoff Ratio:	NA	6.31	
Bypassed flow volume (gallon):	NA	10571	
Percentage of Bypassed Flow (%):	NA	50.57	
Inter-Event Time since prior rain (hours)	≥ 6.0	154.85	

Table 8-3. August 13, 2012 Rain Event Sampling Information			
	Goal	Actual Value	Note
Number of Subsamples in event:	≥ 10	42	
Volume per Subsample (mL):	250	250	
Total Volume for Event (L):	> 2.5	10.5	The actual volumes of both samples were visually consistent with the programmed ones
Programmed Passed Flow Volume per Subsample (gallon):	Small Event: 120	480	
	Moderate Event: 480		
	Large Event: 2000		
Samples Coverage of total storm flow (%)	75.00	97.87	

**Table 8-4. August 13, 2012 Rain Event
Water Quality Analysis Information**

All units are in mg/L except pH, Bacteria in MPN, Turbidity in NTU, Conductivity in μ S and Temperature in $^{\circ}$ C

Constituent	Influent	Effluent	Percentage reduction	Analytical Method	MDL	Laboratory
TSS	35	14	60.0	SM 2540D	1 mg/L	Stillbrook Lab
TSS	93	14	85.4	SM 2540D	1 mg/L	UA Lab
SSC	50	20	60.0	ASTM D3977-97B	1 mg/L	Stillbrook Lab
SSC	93	16	82.4	ASTM D3977-97B	1 mg/L	UA Lab
TDS	33	26	21.2	EPA 160.2	1 mg/L	UA Lab
VSS	15	6	60.0	SM 2540E	1 mg/L	UA Lab
Total N as N	1.0	0.9	10.0	SM 4500-NH3 C / SM 4110B	0.1 mg/L	Stillbrook Lab
Dissolved N as N	0.7	0.7	0.0	SM 4500-NH3 C / SM 4110B	0.1 mg/L	Stillbrook Lab
Ammonia as N	BDL	BDL	NA	SM 4500-NH3 C	0.1 mg/L	Stillbrook Lab
Nitrate as N	0.18	0.19	-5.6	SM 4110B	0.02 mg/L	Stillbrook Lab
Total P as P	1.13	0.86	23.9	SM 4500-P-E	0.02 mg/L	Stillbrook Lab
Dissolved P as P	0.95	0.77	18.9	SM 4500-P-E	0.02 mg/L	Stillbrook Lab
Dissolved Orthophosphate as P	BDL	BDL	NA	SM 4110B	0.02 mg/L	Stillbrook Lab
Total Cd	BDL	BDL	NA	EPA 200.8	0.005 mg/L	Stillbrook Lab
Dissolved Cd	BDL	BDL	NA	EPA 200.8	0.005 mg/L	Stillbrook Lab
Total Cr	0.006	BDL	> 16.7	EPA 200.8	0.005 mg/L	Stillbrook Lab
Dissolved Cr	BDL	BDL	NA	EPA 200.8	0.005 mg/L	Stillbrook Lab
Total Cu	0.047	0.016	66.0	EPA 200.8	0.005 mg/L	Stillbrook Lab
Dissolved Cu	0.010	0.006	40.0	EPA 200.8	0.005 mg/L	Stillbrook Lab
Total Pb	0.022	BDL	> 77.3	EPA 200.8	0.005 mg/L	Stillbrook Lab
Dissolved Pb	BDL	BDL	NA	EPA 200.8	0.005 mg/L	Stillbrook Lab
Total Zn	0.050	0.017	66.0	EPA 200.8	0.005 mg/L	Stillbrook Lab
Dissolved Zn	0.014	0.008	42.9	EPA 200.8	0.005 mg/L	Stillbrook Lab
Total Coliform	> 48,392	> 48,392	NA	IDEXX Method	<1	UA Lab
<i>E. Coli</i>	3077	1887	38.7	IDEXX Method	<1	UA Lab
Enterococci	13769	2847	79.3	IDEXX Method	<1	UA Lab
pH	6.85	6.93	-1.2	SM 4500-H+ B/ EPA 150	-2.00	UA Lab
Turbidity	11.15	8.59	23.0	SM 2130B/ EPA 180.1	0 NTU	UA Lab
Conductivity	24.5	23.9	2.4	SM 2510B/ EPA 120.6	0 μ S	UA Lab
Temperature	24.0	24.2	-0.8	SM 212/ EPA 170.1	5 $^{\circ}$ C	UA Lab

Table 8-5. August 13, 2012 Rain Event SSC Quality Control Table									
Laboratory	Influent (mg/L)			Effluent (mg/L)			Percentage reduction (%)		
	1.5 to 1180 μm particles	> 1180 μm particles	Total	1.5 to 1180 μm particles	> 1180 μm particles	Total	1.5 to 1180 μm particles	> 1180 μm particles	Total
Stillbrook Lab	50	NA*	NA*	20	NA*	NA*	60.0	NA*	NA*
UA Lab	86	7	93	15	1	16	82.6	79.8	82.4

* This analysis does not include the mass of particle greater than 1180 μm since the sample was pre-sieved by the 1180 μm screen before the sample splitting to protect the cone splitter. This mass was analyzed separately by the UA lab.

Table 8-6. August 13, 2012 Rain Event Specific Gravity Quality Control Table						
Coulter Counter	Particle Volume ($\mu\text{m}^3/\text{L}$ sample)		Mass (mg/L sample)		Specific Gravity (3 to 250 μm) (g/cc)	
	Influent	Effluent	Influent	Effluent	Influent	Effluent
Particles from 3 to 250 μm *	13845	6124	34	10	2.5	1.7


* This particle specific gravity was calculated using the Coulter Counter particle volume data for 3 to 250 μm particles along with the measured mass concentration for the same particle size range.



Table 8-7. August 13, 2012 Rain Event TSS Quality Control Table						
Filter Type & Pore Size	Influent (mg/L)			Effluent (mg/L)		
	1	2 (replicate)	Average	1	2 (replicate)	Average
Whatman® 934-AH™ Glass Microfiber Filters, 1.5 μm	94	91	93	13	14	14
Millipore Membrane Filter, 0.45 μm	91	93	92	18	16	17



Note: The average TSS values from Whatman® 934-AH™ Glass Microfiber Filters are reported as the formal TSS results. The TSS values from the 0.45 μm membrane filters are used for the particle size distribution calculations and secondarily to test the repeatability of the method and the significance of the different filters types for these small pore sizes.

Table 8-8. August 13, 2012 Rain Event Bacteria Quality Control Table						
Constituents	Influent (MPN/100 mL)			Effluent (MPN/100 mL)		
	Dilution 1 (10X)	Dilution 2 (20X)	Average	Dilution 1 (10X)	Dilution 2 (20X)	Average
Total Coliform	> 24,196	> 48,392	> 48,392	> 24,196	> 48,392	> 48,392
<i>E. Coli</i>	3,654	2,500	3,077	2,014	1,760	1,887
Enterococci	12,997	14,540	13,769	3,076	2,618	2,847

Table 8-9. August 13, 2012 Rain Event VSS Quality Control Table						
Filter Type & Pore Size	Influent (mg/L)			Effluent (mg/L)		
	1	2 (replicate)	Average	1	2 (replicate)	Average
Whatman® 934-AH™ Glass Microfiber Filters, 1.5µm	14	16	15	7	5	6

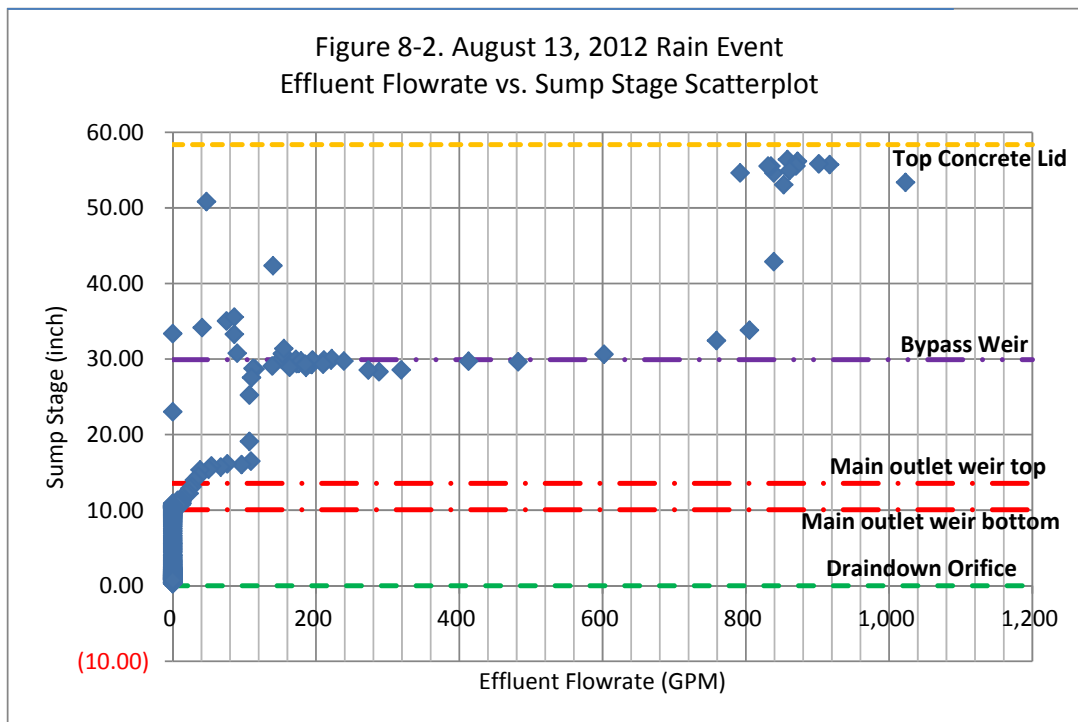

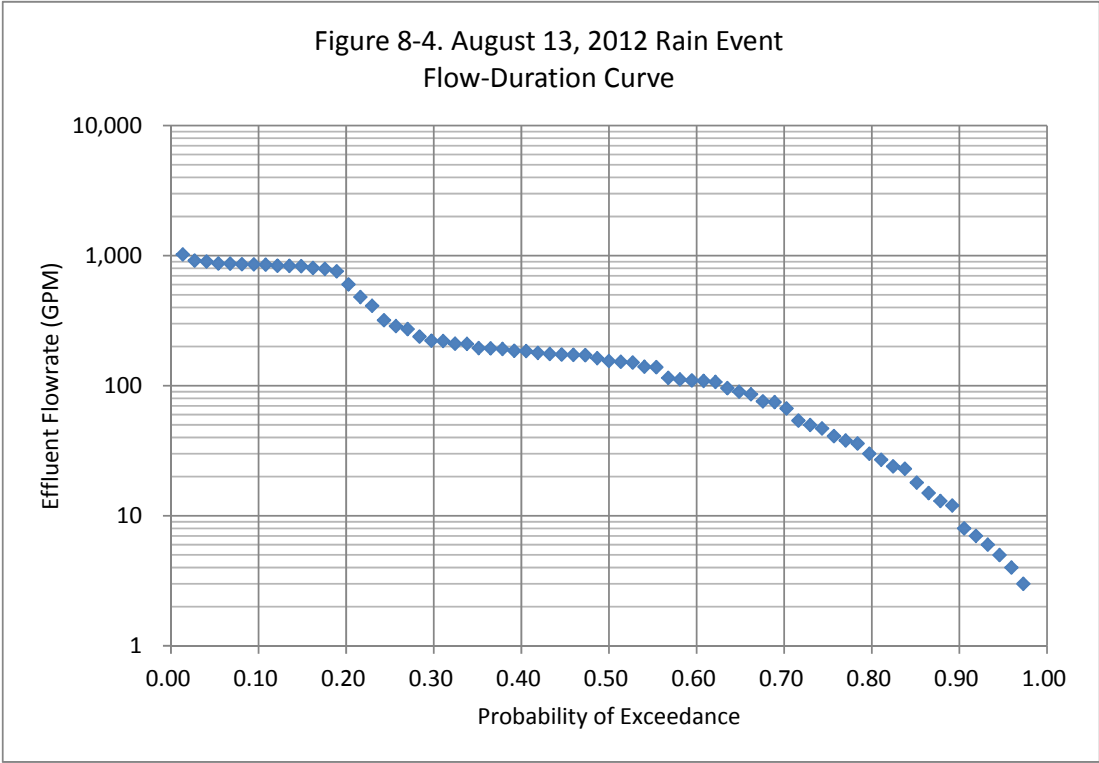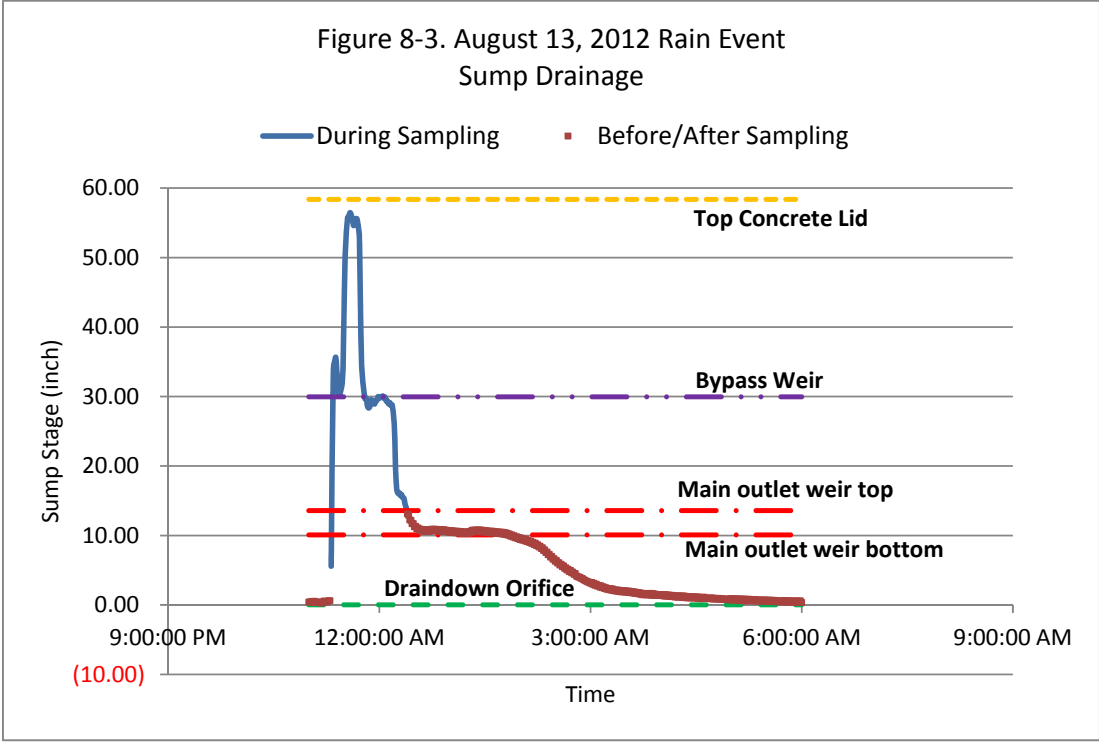

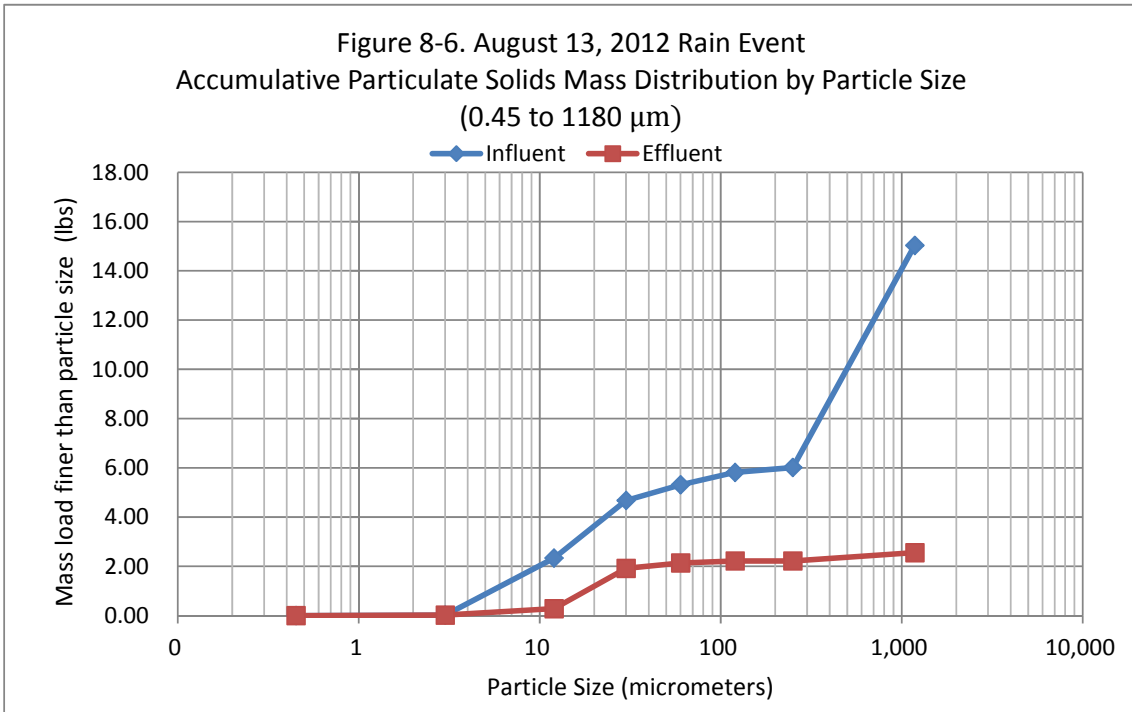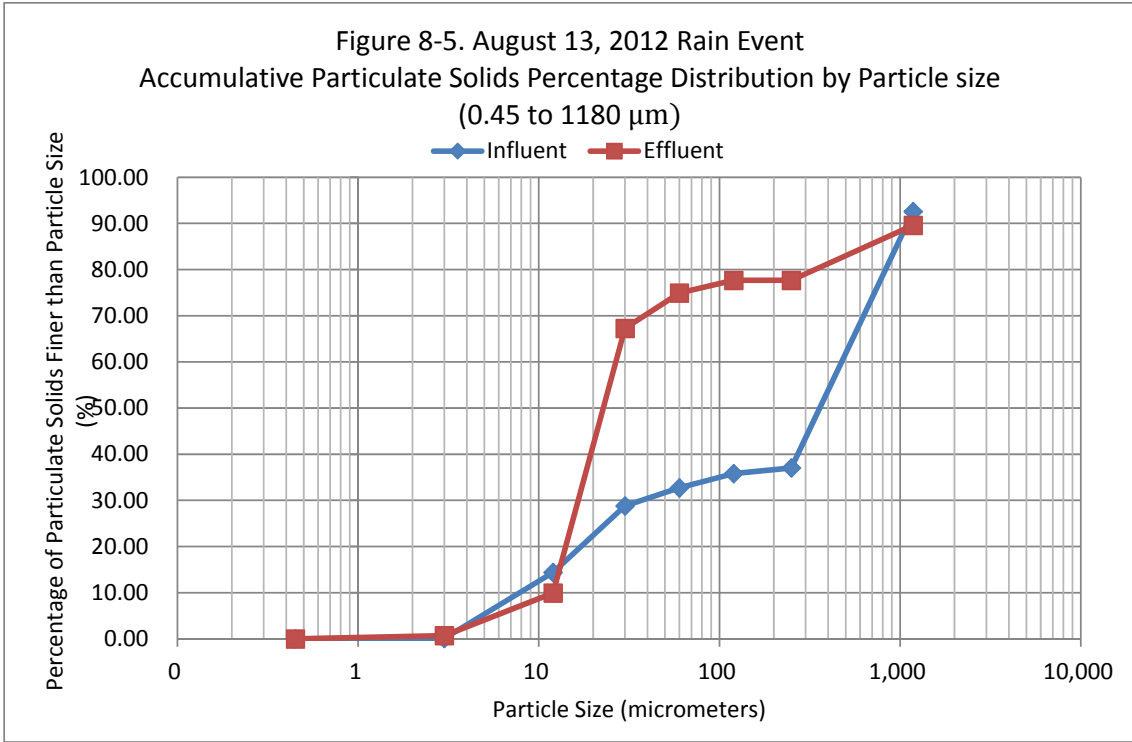

Not shown: The influent sample had 1.21 lbs larger than 1180 μm and the effluent had 0.30 lbs larger than 1180 μm (7.43% and 10.43% of the total particulate solids load, respectively). The absolute largest particle sizes are not known due to their irregular shape.

Table 8-10. August 13, 2012 Rain Event Particle Size Distribution Information								
Particle Size (um)	Solids Conc. for the range (mg/L)		Mass Percentage (%)		Mass for the range (lbs)		Total Amount Captured (lbs)	Percentage Reduction by Mass (%)
	Influent (Without Sump)	Effluent	Influent (Without Sump)	Effluent	Influent (Without Sump)	Effluent		
0.45 to 3	0.10	0.09	0.11	0.70	0.02	0.02	0.00	-12.90
3 to 12	13.14	1.22	14.27	9.24	2.32	0.26	2.05	88.62
12 to 30	13.28	7.59	14.42	57.33	2.34	1.64	0.71	30.15
30 to 60	3.60	1.01	3.91	7.66	0.63	0.22	0.42	65.57
60 to 120	2.86	0.36	3.11	2.75	0.50	0.08	0.43	84.46
120 to 250	1.12	0.00	1.21	0.00	0.20	0.00	0.20	100.00
250 to 1180	51.15	1.57	55.54	11.90	9.02	0.34	8.68	96.24
>1180	6.84	1.38	7.43	10.43	1.21	0.30	0.91	75.33
Total	92	13	100.00	100.00	16.24	2.85	13.38	82.43

Table 8-11. August 13, 2012 Rain Event Particle Size Distribution Information				
Particles Size (um)	Accumulative Mass Percentage (%)		Accumulative Mass (lbs)	
	Influent (Without Sump)	Effluent	Influent (Without Sump)	Effluent
<0.45	0.00	0.00	0.00	0.00
<3	0.11	0.70	0.02	0.02
<12	14.38	9.94	2.33	0.28
<30	28.80	67.27	4.68	1.92
<60	32.71	74.93	5.31	2.14
<120	35.81	77.67	5.82	2.22
<250	37.03	77.67	6.01	2.22
<1180	92.57	89.57	15.03	2.56
>1180	100.00	100.00	16.24	2.85






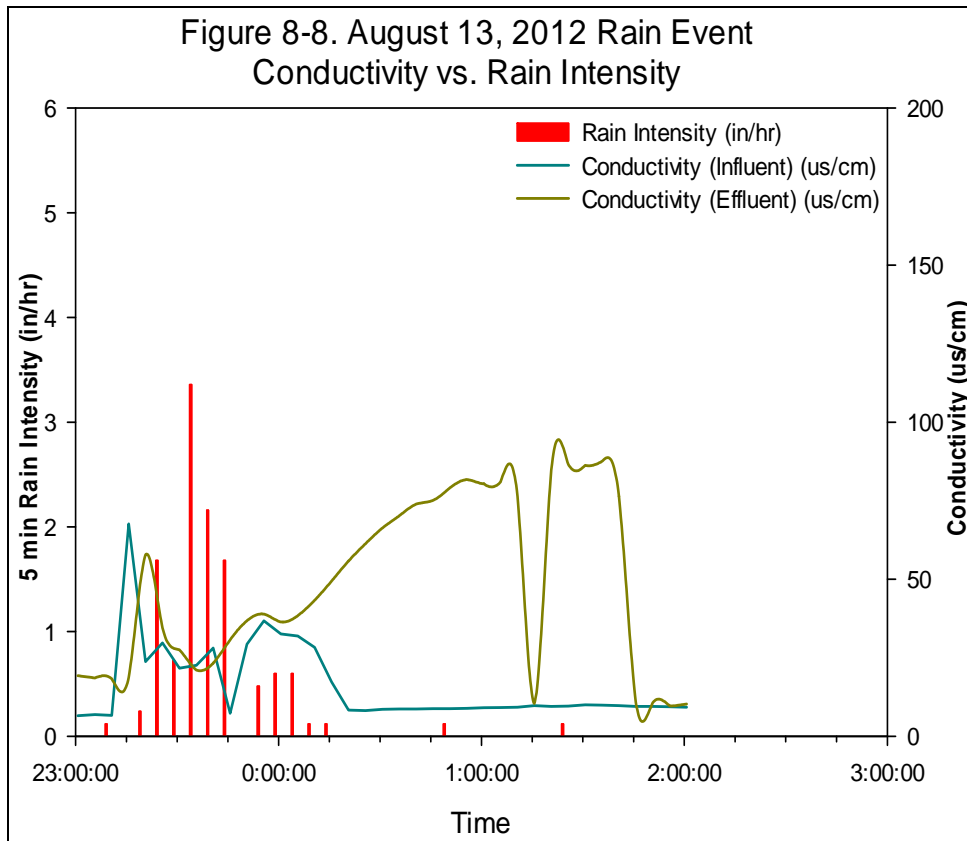


Figure 8-9. August 13, 2012 Rain Event
Turbidity vs. Rain Intensity

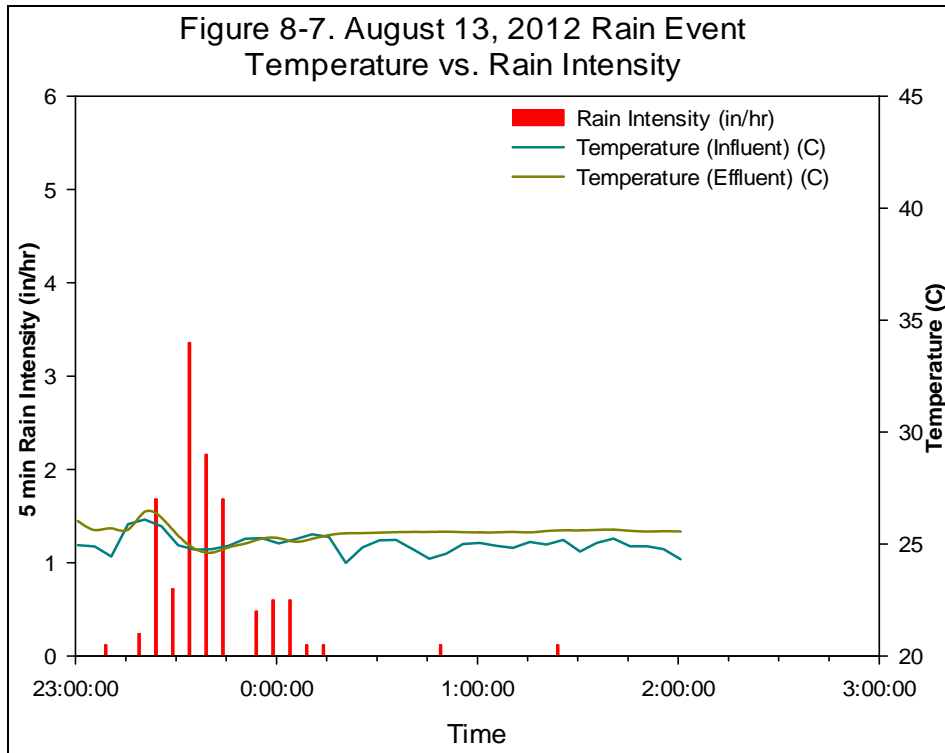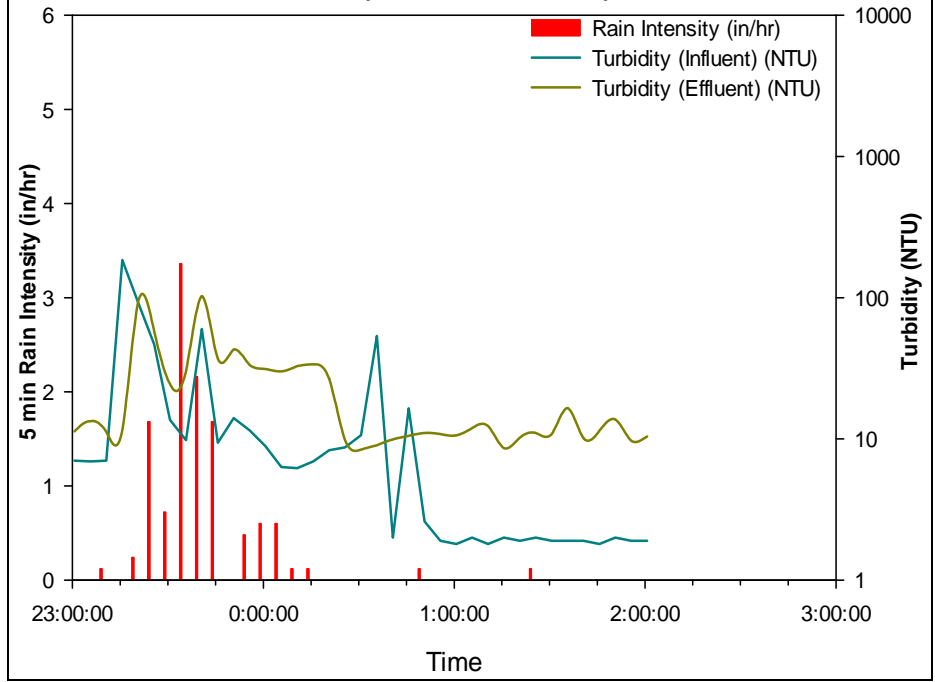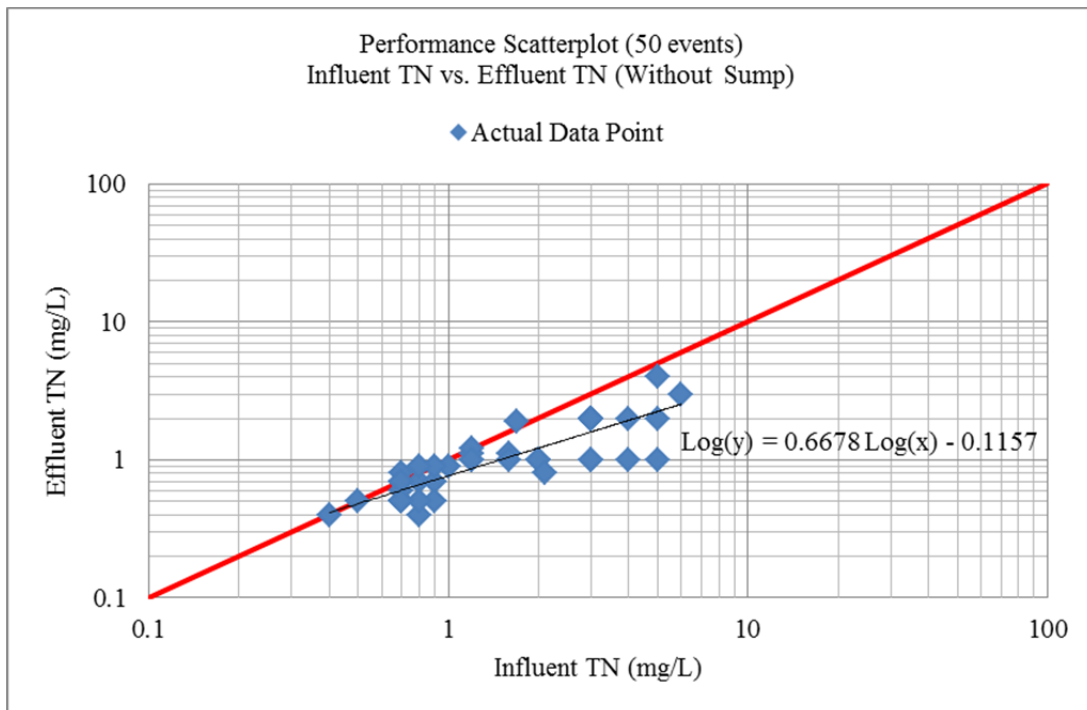

Appendix D.1: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Nitrogen (50 Sampled Storms)

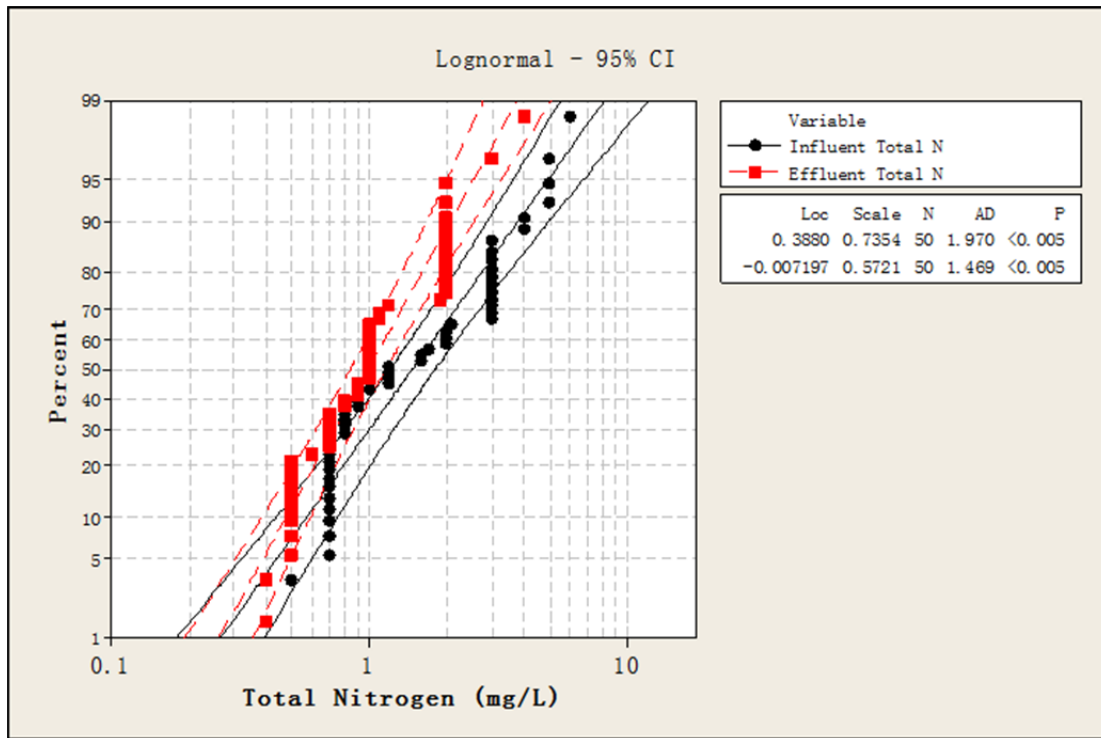

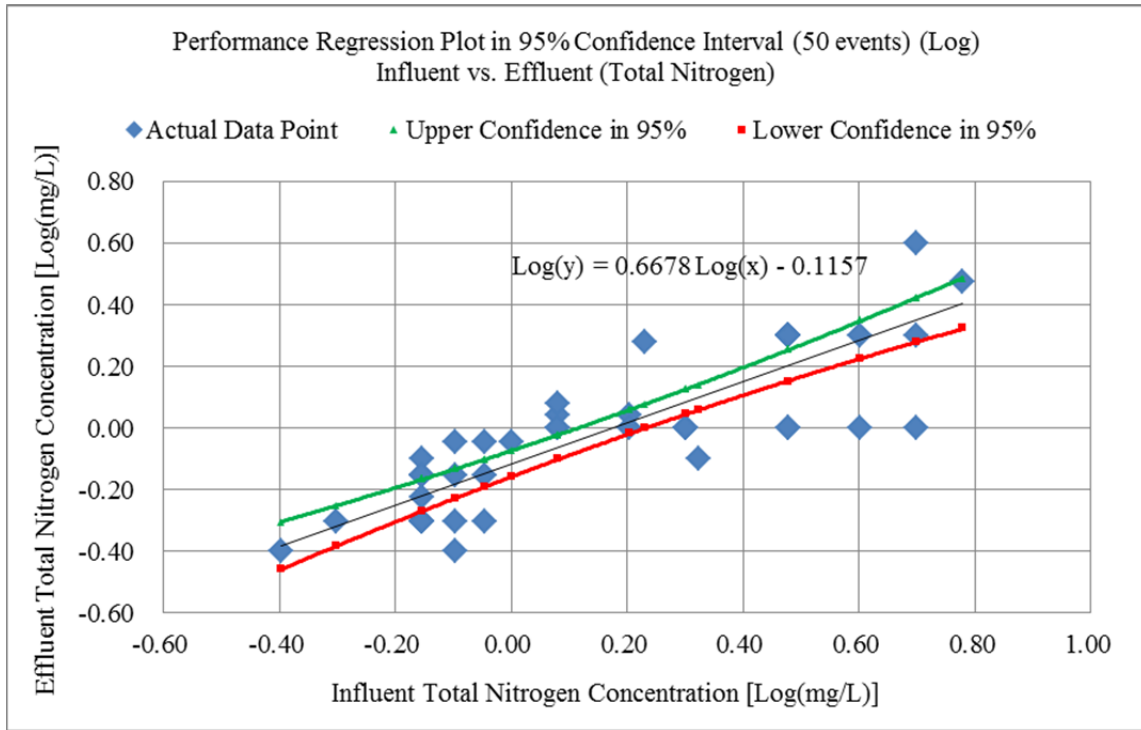


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.86
R Square	0.74
Adjusted R Square	0.73
Standard Error	0.13
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	2.23	2.23	134.55	0.00
Residual	48.00	0.80	0.02		
Total	49.00	3.02			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.12	0.02	-5.61	0.00	-0.16	-0.07	-0.16	-0.07
X Variable 1	0.67	0.06	11.60	0.00	0.55	0.78	0.55	0.78

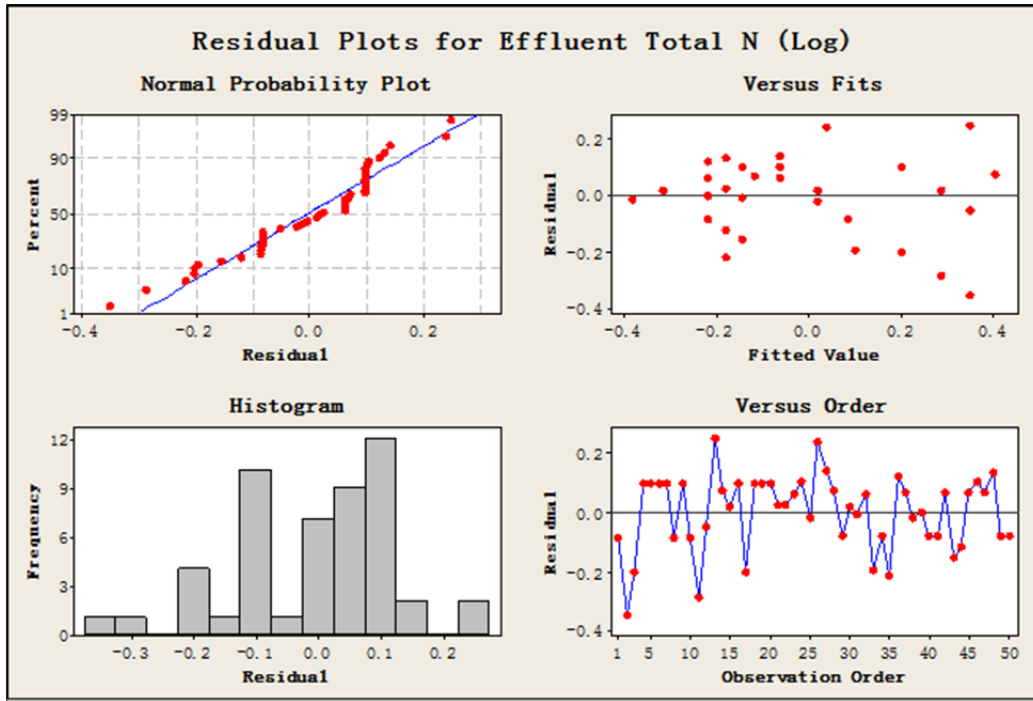

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	0.25	0.75
Influent TN	50.00	0.00	1.20	0.70	3.00
Effluent TN	50.00	0.00	1.00	0.68	2.00



$W = -864.000$ $T_+ = 19.500$ $T_- = -883.500$


Z-Statistic (based on positive ranks) = -5.428

($P = < 0.001$)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference ($P = < 0.001$).

Appendix D.2: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Nitrogen (50 Sampled Storms)

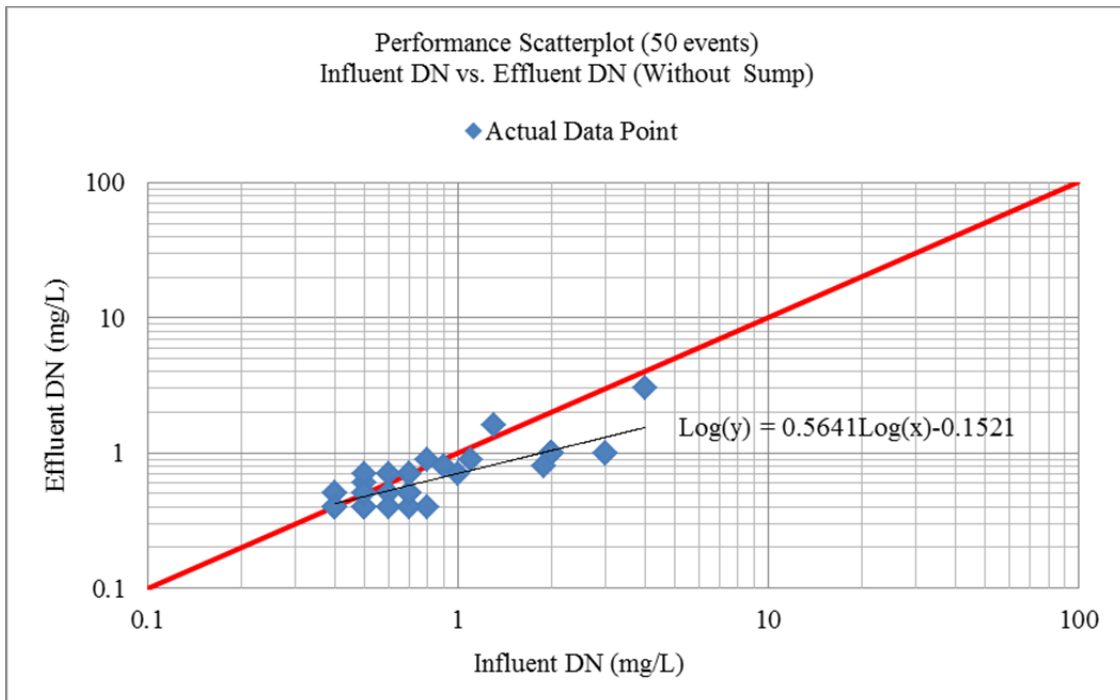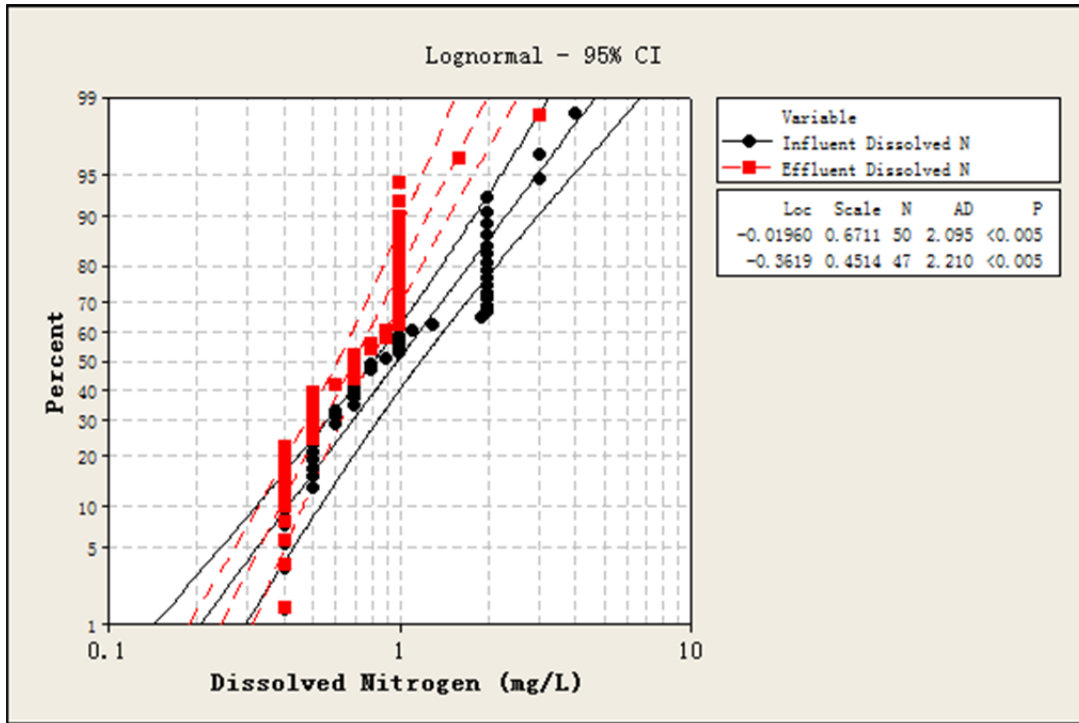

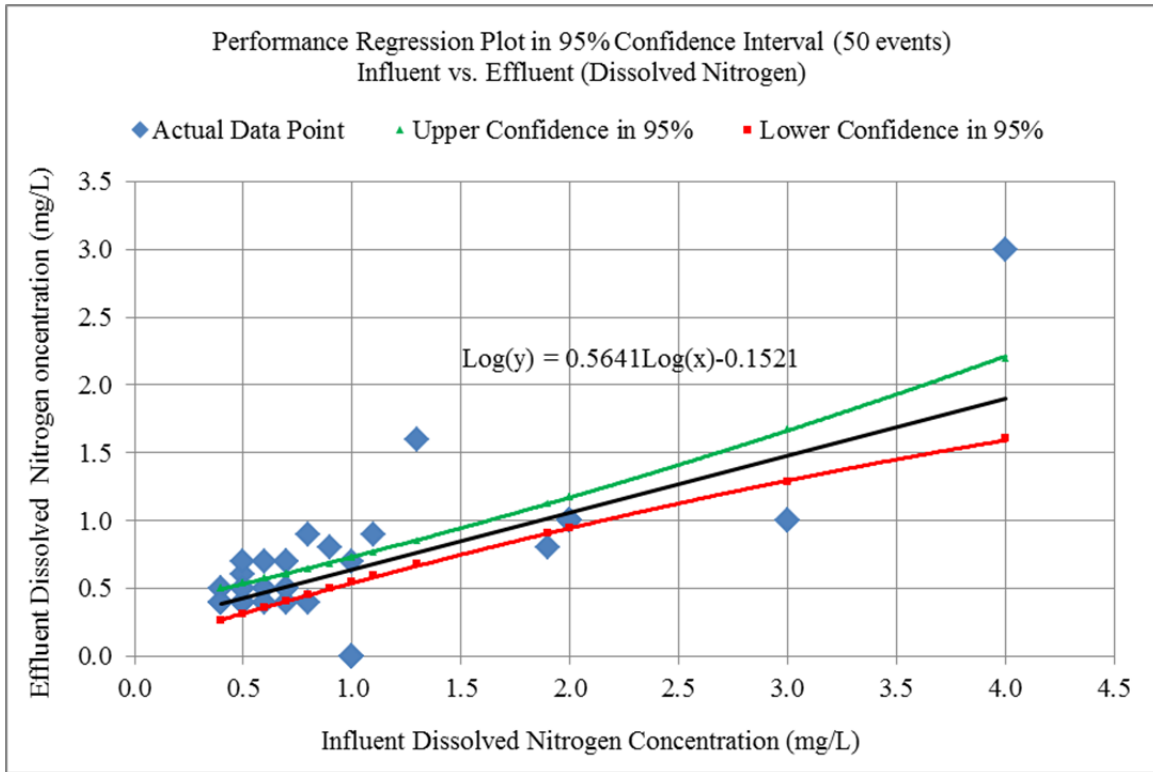


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.87
R Square	0.75
Adjusted R Square	0.74
Standard Error	0.10
Observations	47.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	1.32	1.32	134.45	0.00
Residual	45.00	0.44	0.01		
Total	46.00	1.77			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.15	0.01	-10.50	0.00	-0.18	-0.12	-0.18	-0.12
X Variable 1	0.56	0.05	11.60	0.00	0.47	0.66	0.47	0.66

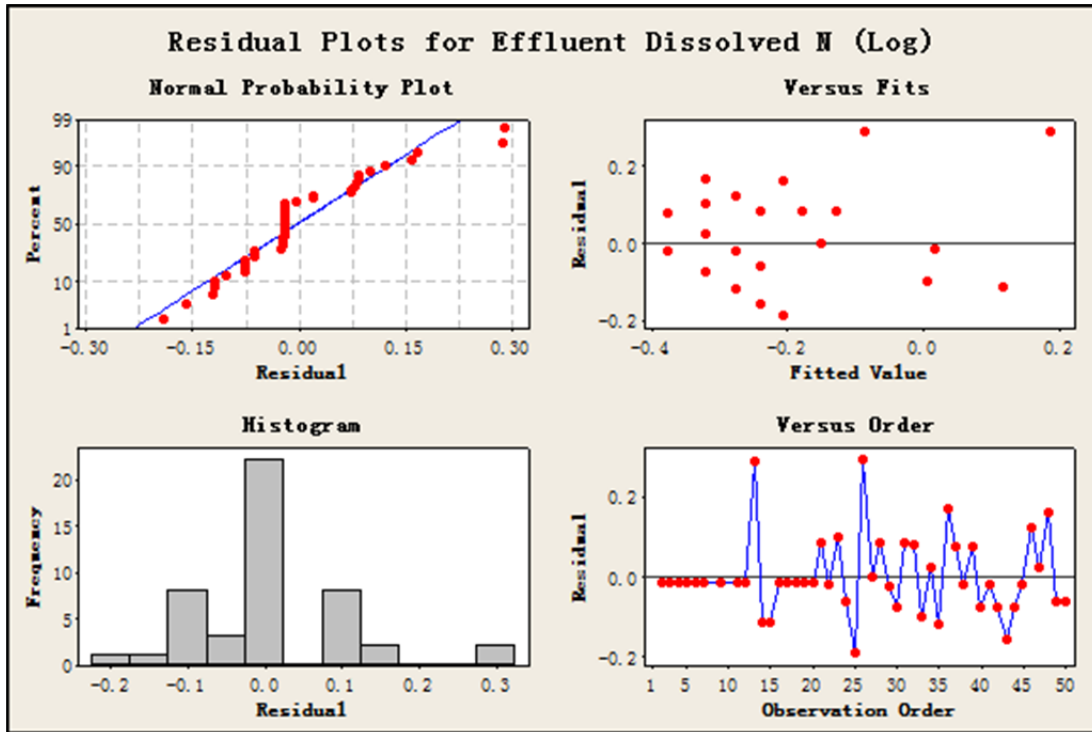

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed ($P < 0.050$)

Group	N	Missing	Median	0.25	0.75
Influent DN	50.00	0.00	0.85	0.50	2.00
Effluent DN	50.00	0.00	0.70	0.40	1.00



$W = -776.000$ $T^+ = 63.500$ $T^- = -839.500$


Z-Statistic (based on positive ranks) = -4.910

($P = < 0.001$)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference ($P = < 0.001$).

Appendix D.3: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Nitrogen (50 Sampled Storms)

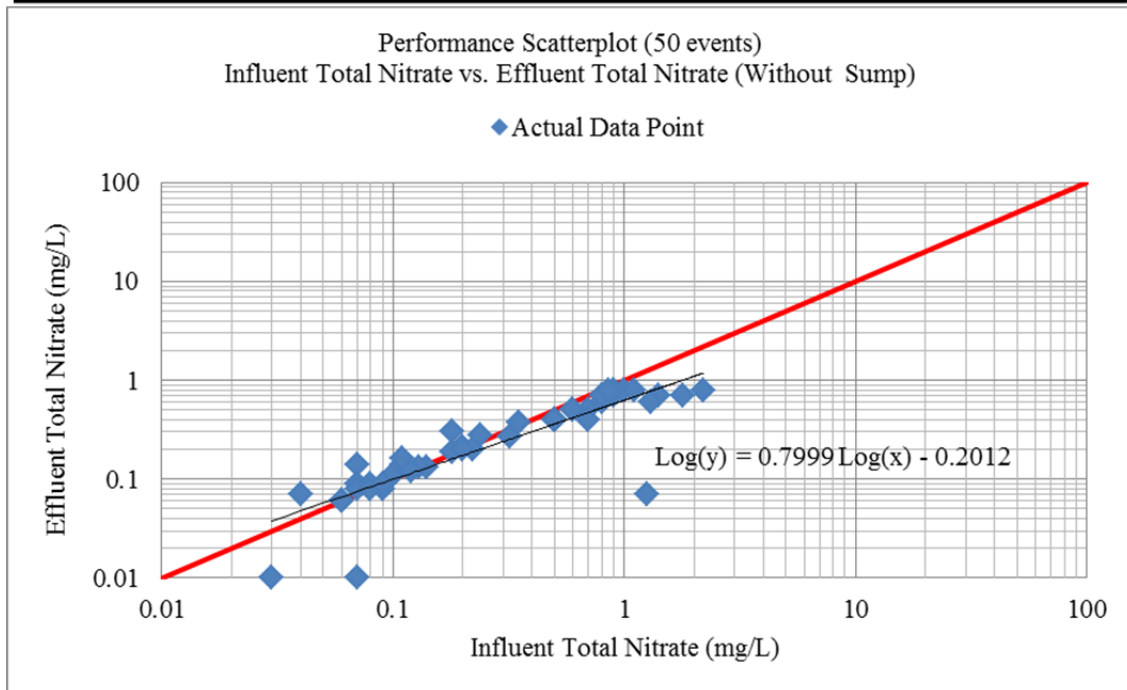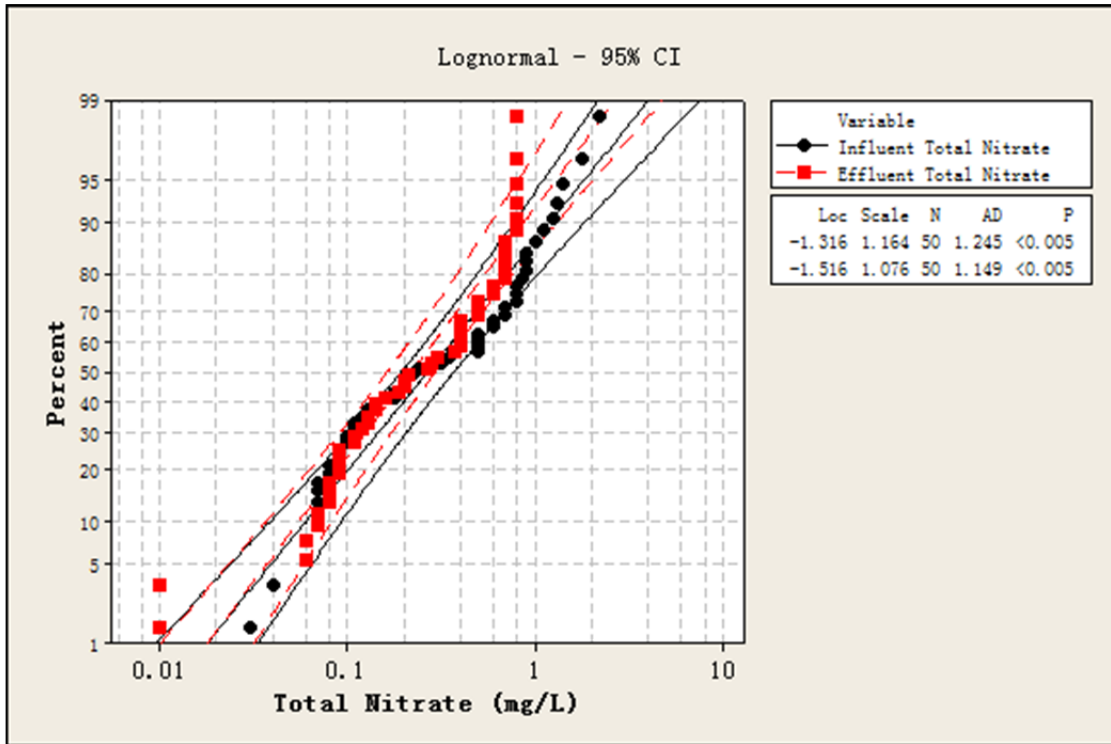

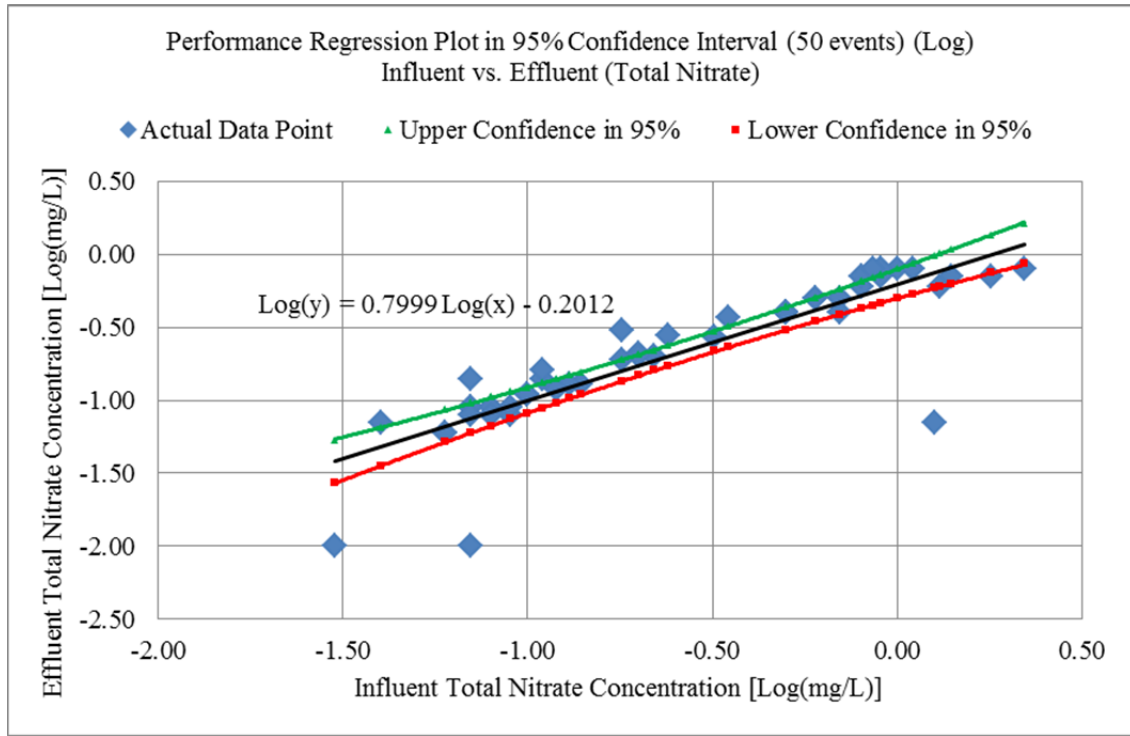


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.87
R Square	0.75
Adjusted R Square	0.74
Standard Error	0.24
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	8.02	8.02	143.07	0.00
Residual	48.00	2.69	0.06		
Total	49.00	10.71			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.20	0.05	-3.96	0.00	-0.30	-0.10	-0.30	-0.10
X Variable 1	0.80	0.07	11.96	0.00	0.67	0.93	0.67	0.93

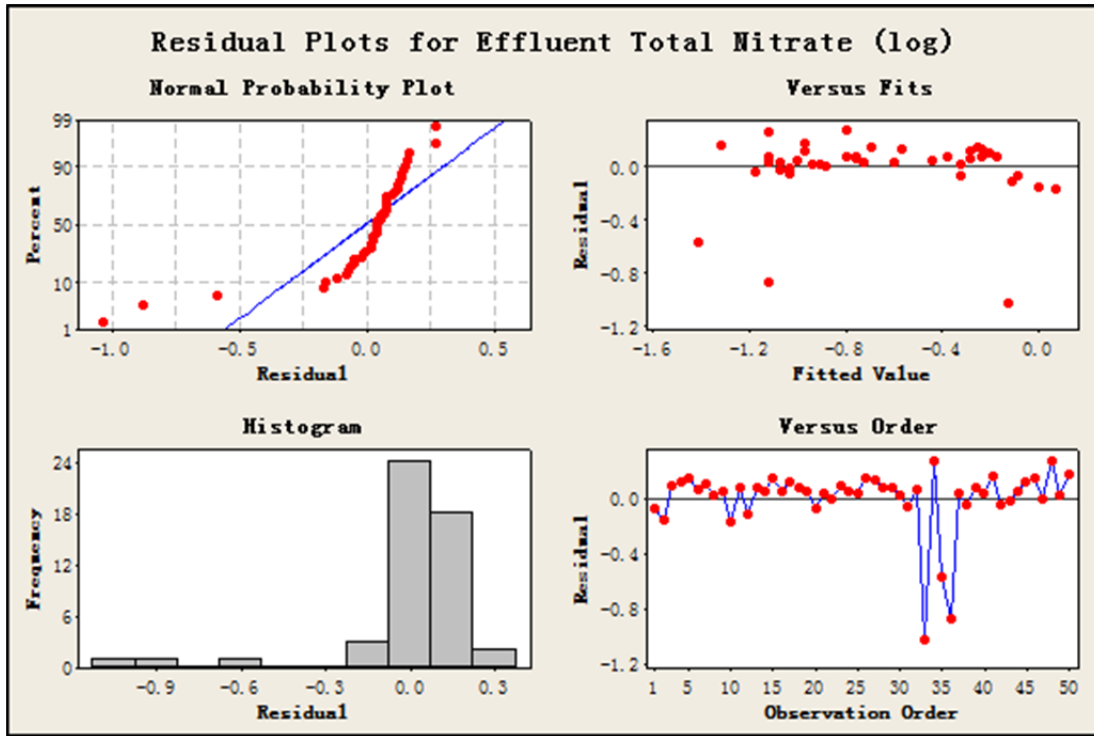

Wilcoxon Signed Rank Test



Normality Test (Shapiro-Wilk) Failed (P < 0.050)


Group	N	Missing	Median	0.25	0.75
Influent Nitrate	50.00	0.00	0.23	0.09	0.80
Effluent Nitrate	50.00	2.00	0.28	0.11	0.60

W= -532.000 T+ = 164.500 T- = -696.500
 Z-Statistic (based on positive ranks) = -3.451
 (P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix D.4: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Phosphorus (50 Sampled Storms)

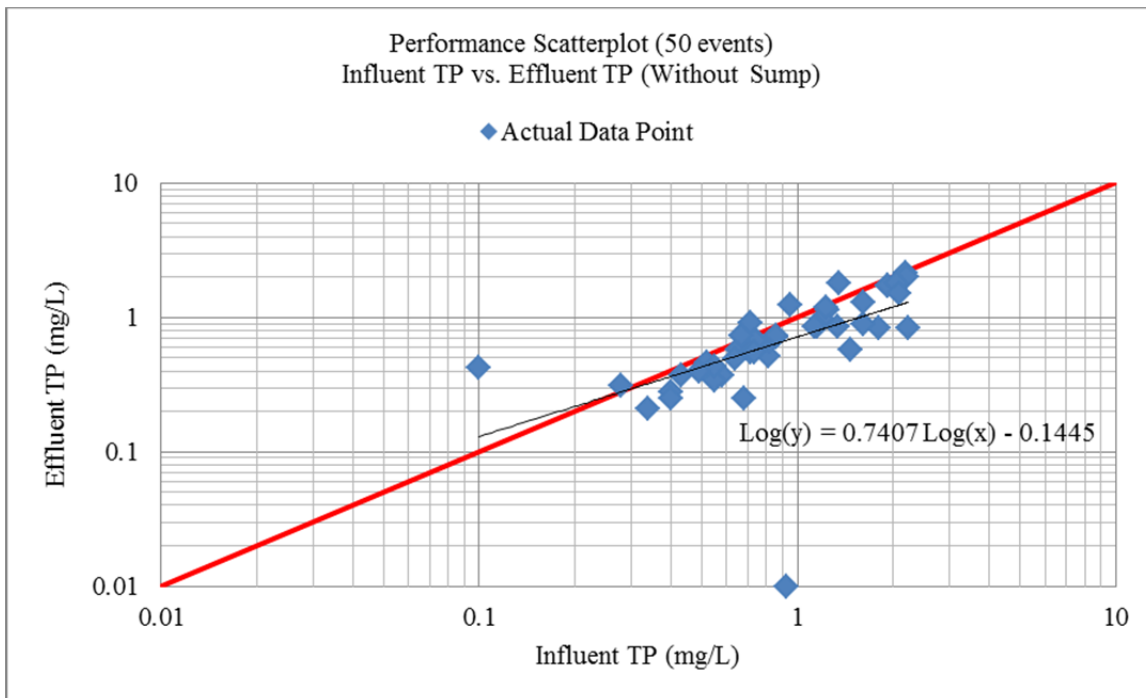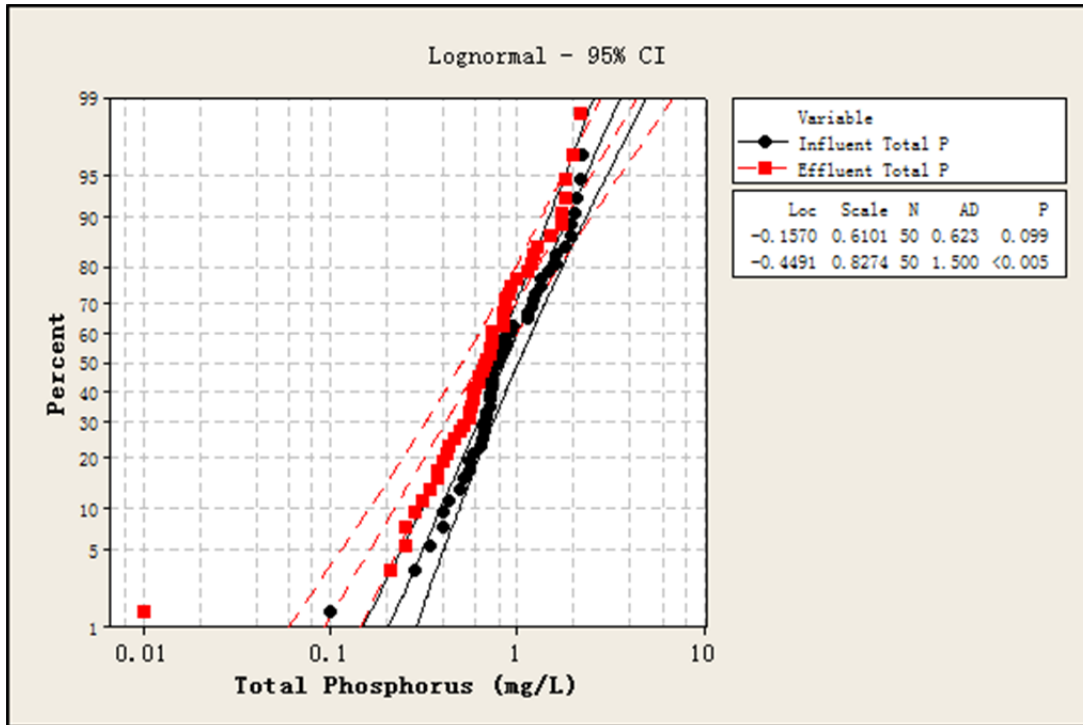

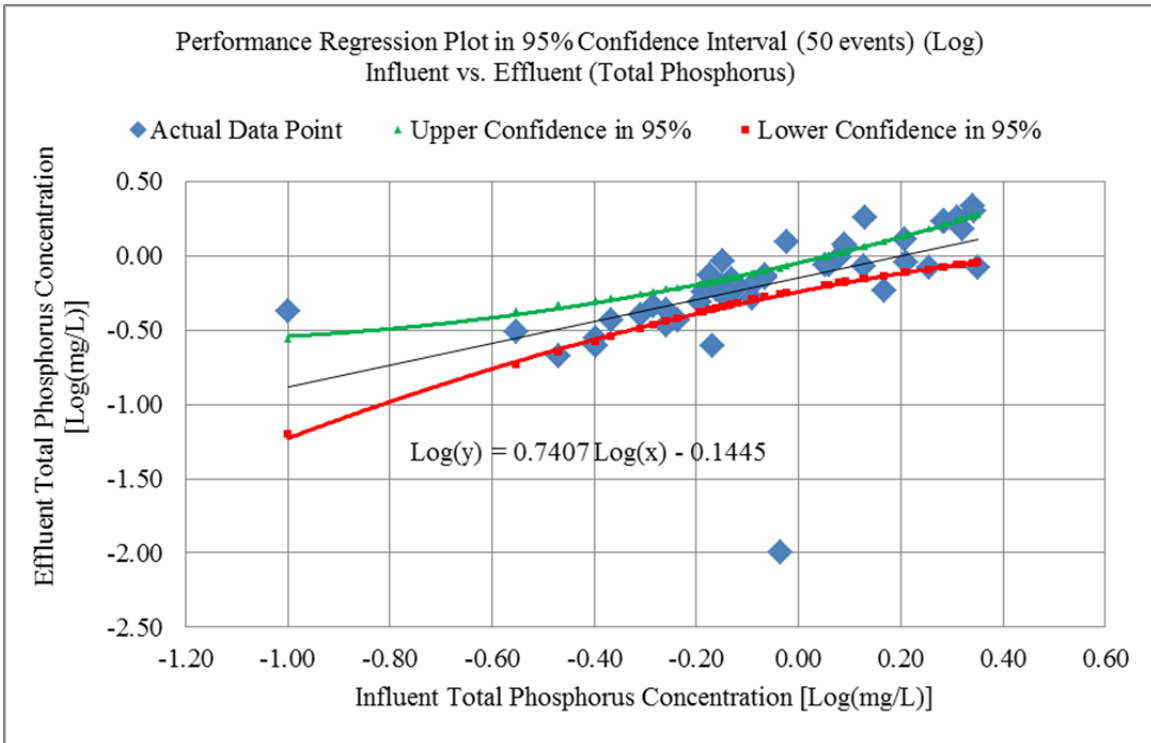


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.55
R Square	0.30
Adjusted R Square	0.28
Standard Error	0.30
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	1.89	1.89	20.41	0.00
Residual	48.00	4.44	0.09		
Total	49.00	6.33			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.14	0.04	-3.25	0.00	-0.23	-0.06	-0.23	-0.06
X Variable 1	0.74	0.16	4.52	0.00	0.41	1.07	0.41	1.07

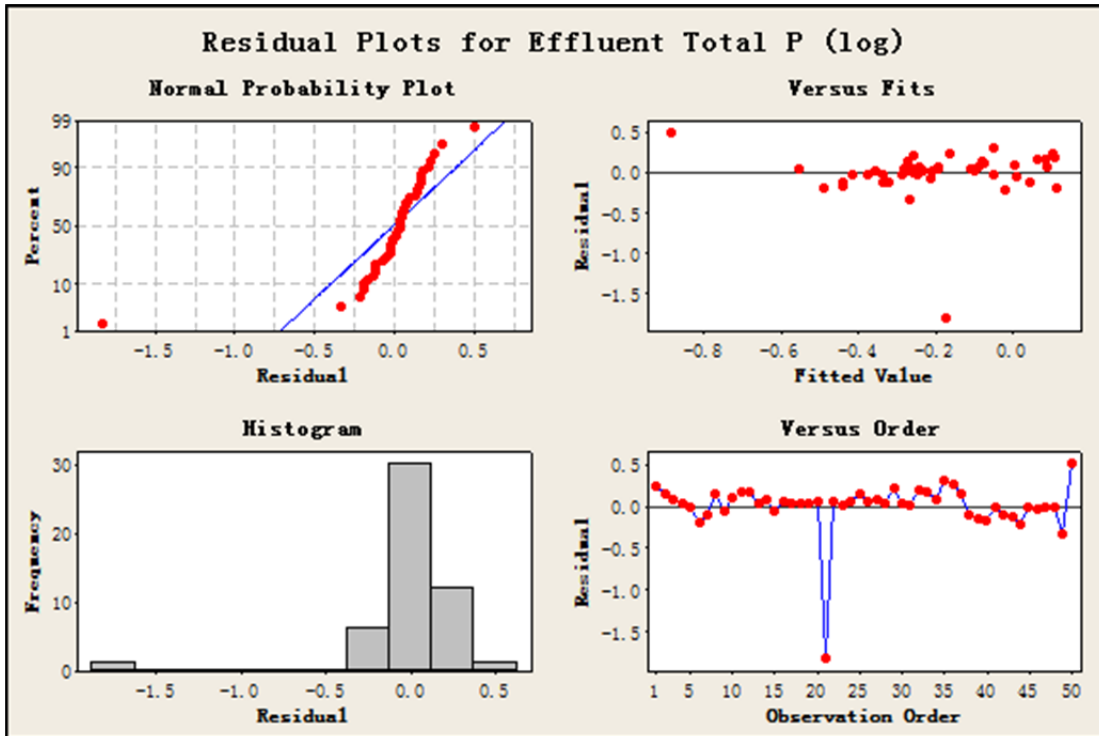

Note: consistent high level of phosphorus concentrations were found from October, November, and December, 2012. Reason was unknown.

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent TP	50.00	0.00	0.79	0.65	1.34
Effluent TP	50.00	1.00	0.69	0.48	0.95



W= -887.000 T+ = 169.000 T- = -1056.000


Z-Statistic (based on positive ranks) = -4.412

(P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix D.5: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Phosphorus (50 Sampled Storms)

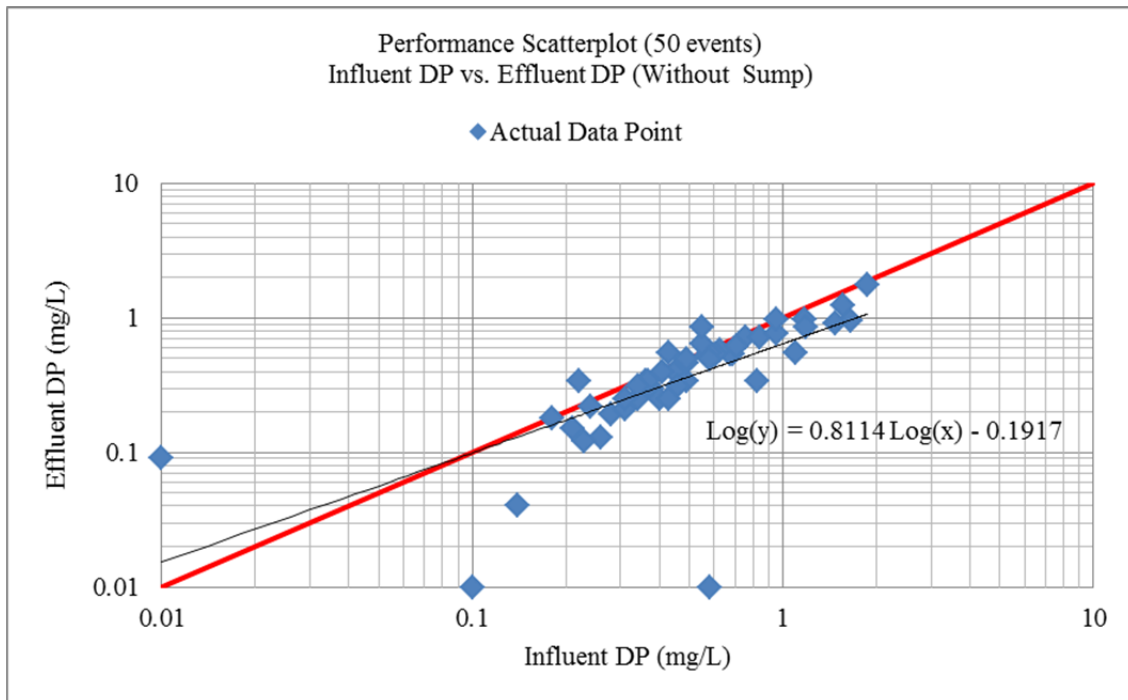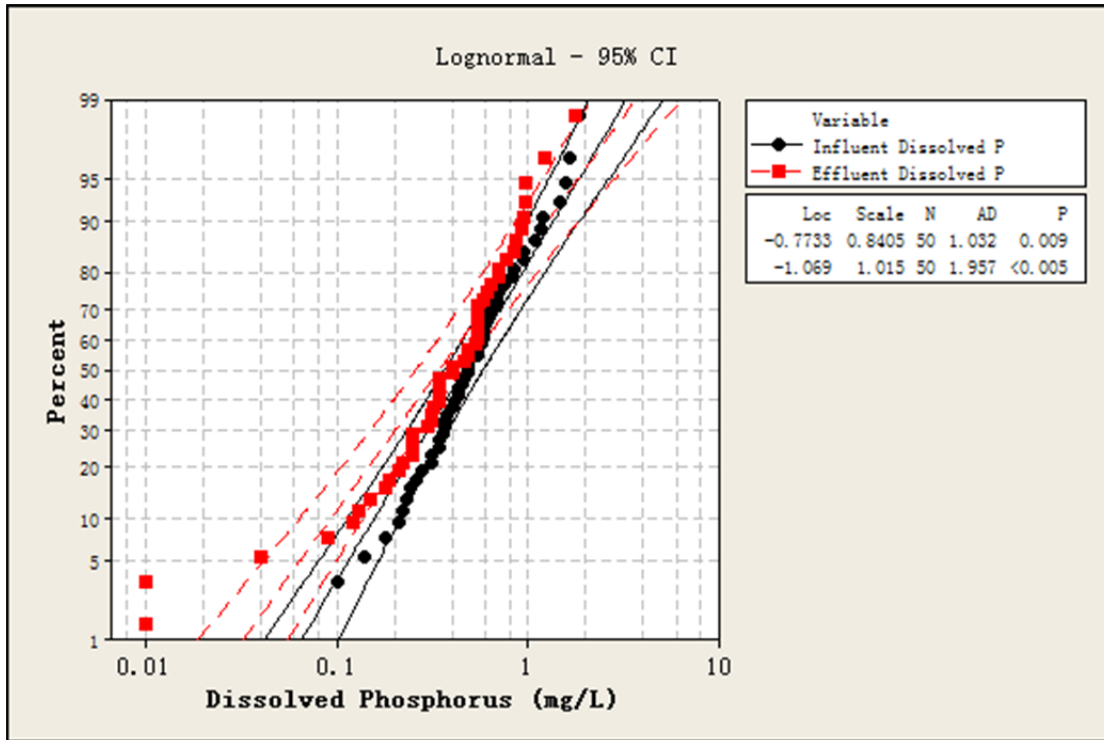

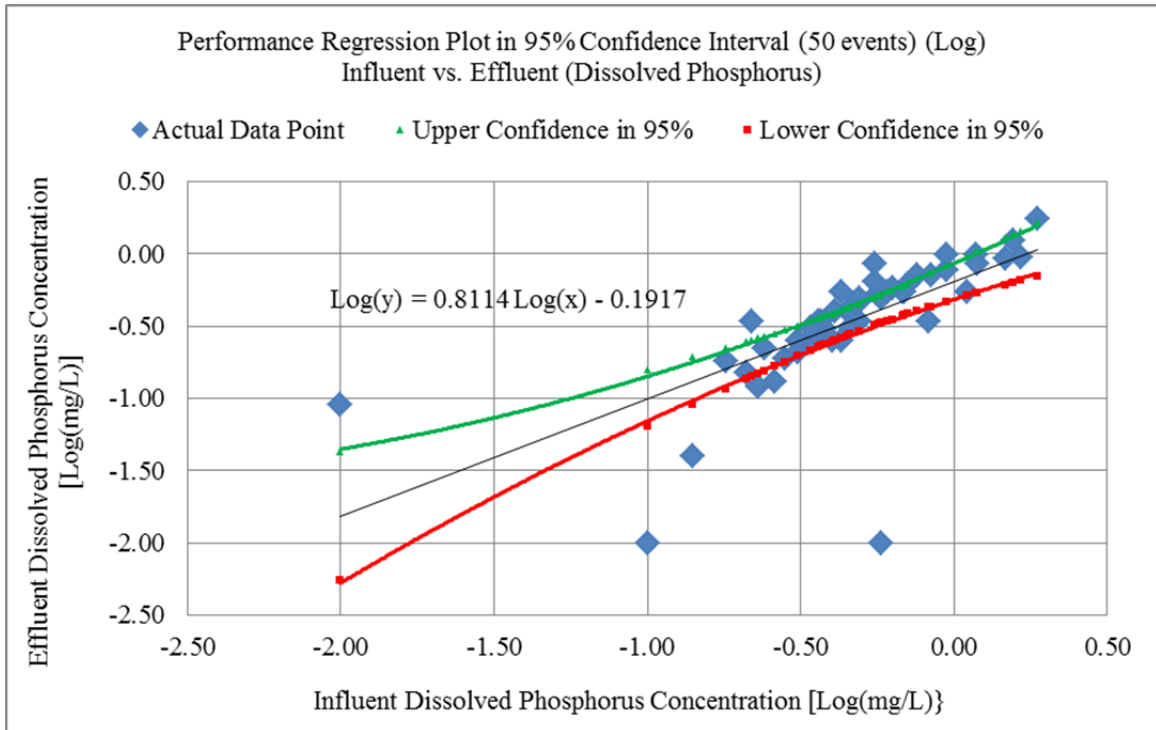


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.67
R Square	0.45
Adjusted R Square	0.44
Standard Error	0.33
Observations	50.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	4.30	4.30	39.45	0.00
Residual	48.00	5.23	0.11		
Total	49.00	9.53			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.19	0.06	-3.01	0.00	-0.32	-0.06	-0.32	-0.06
X Variable 1	0.81	0.13	6.28	0.00	0.55	1.07	0.55	1.07

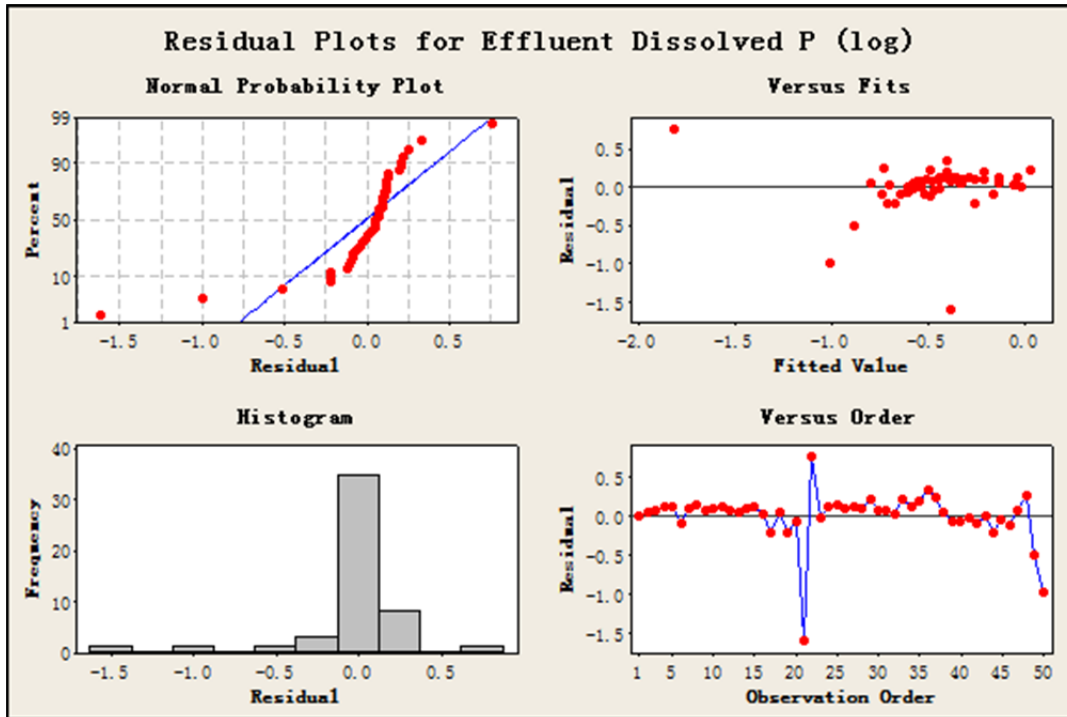

Note: consistent high level of phosphorus concentrations were found from October, November, and December, 2012. Reason was unknown.

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent DP	50.00	1.00	0.49	0.34	0.74
Effluent DP	50.00	2.00	0.43	0.25	0.63



W= -799.000 T+ = 118.000 T- = -917.000


Z-Statistic (based on positive ranks) = -4.510

(P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix D.6: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Copper (50 Sampled Storms)

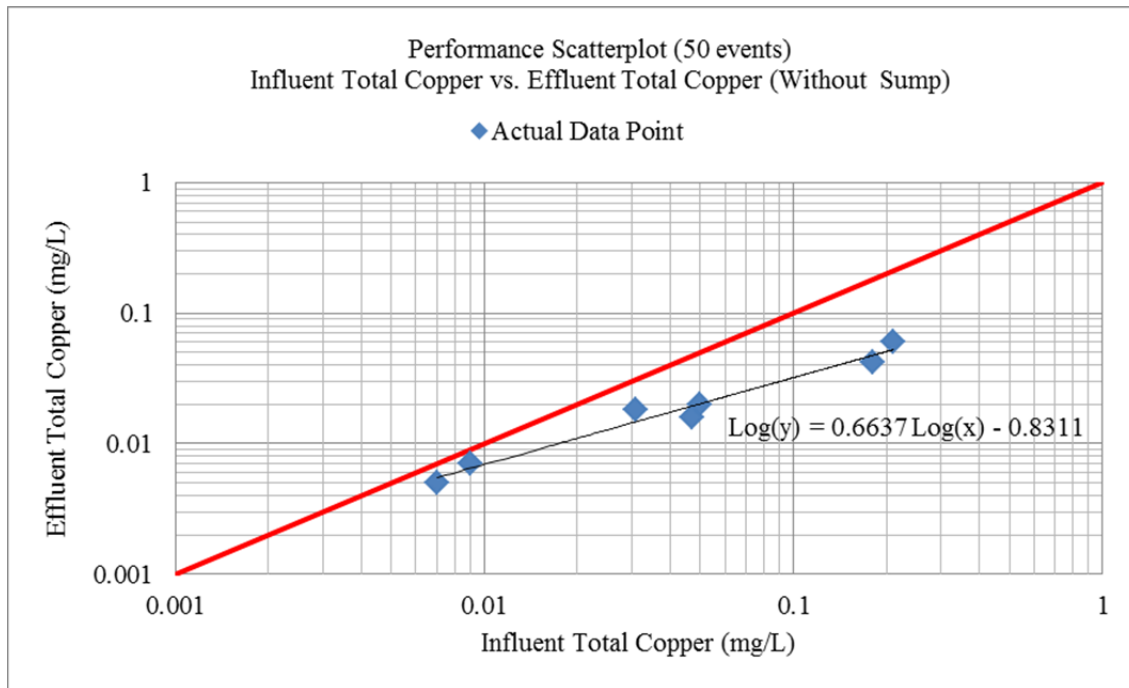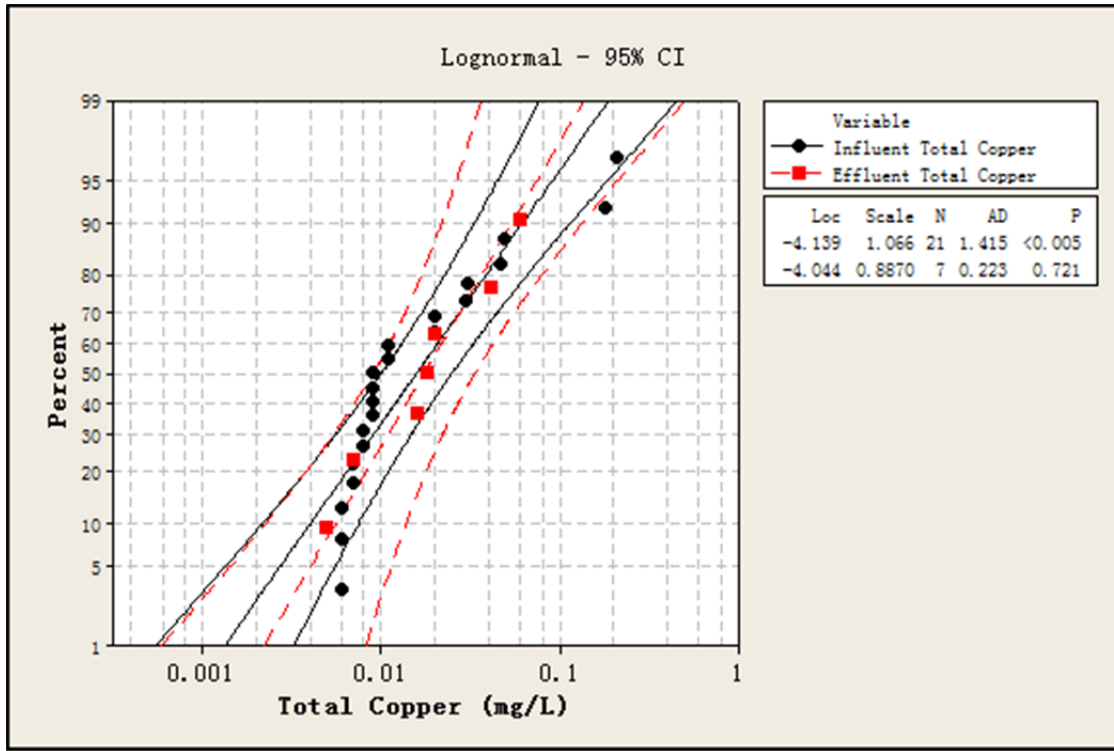

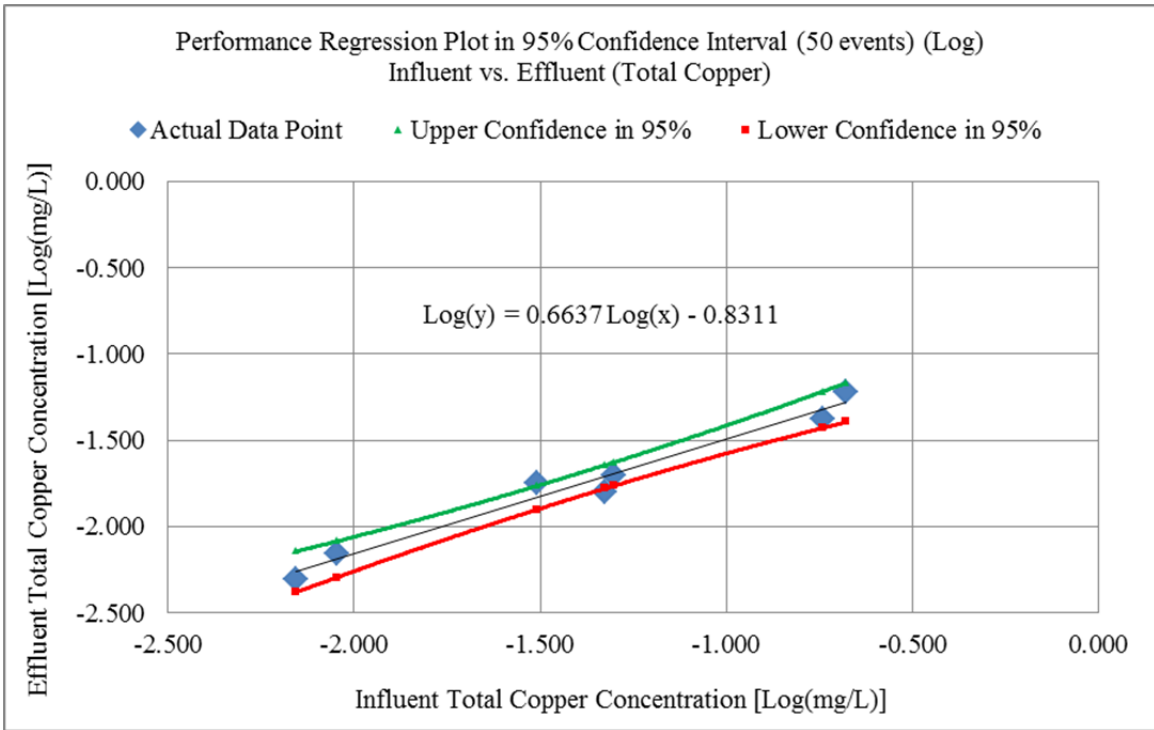


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.99
R Square	0.97
Adjusted R Square	0.97
Standard Error	0.07
Observations	7.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	0.87	0.87	182.85	0.00
Residual	5.00	0.02	0.00		
Total	6.00	0.89			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.83	0.07	-11.35	0.00	-1.02	-0.64	-1.02	-0.64
X Variable 1	0.66	0.05	13.52	0.00	0.54	0.79	0.54	0.79

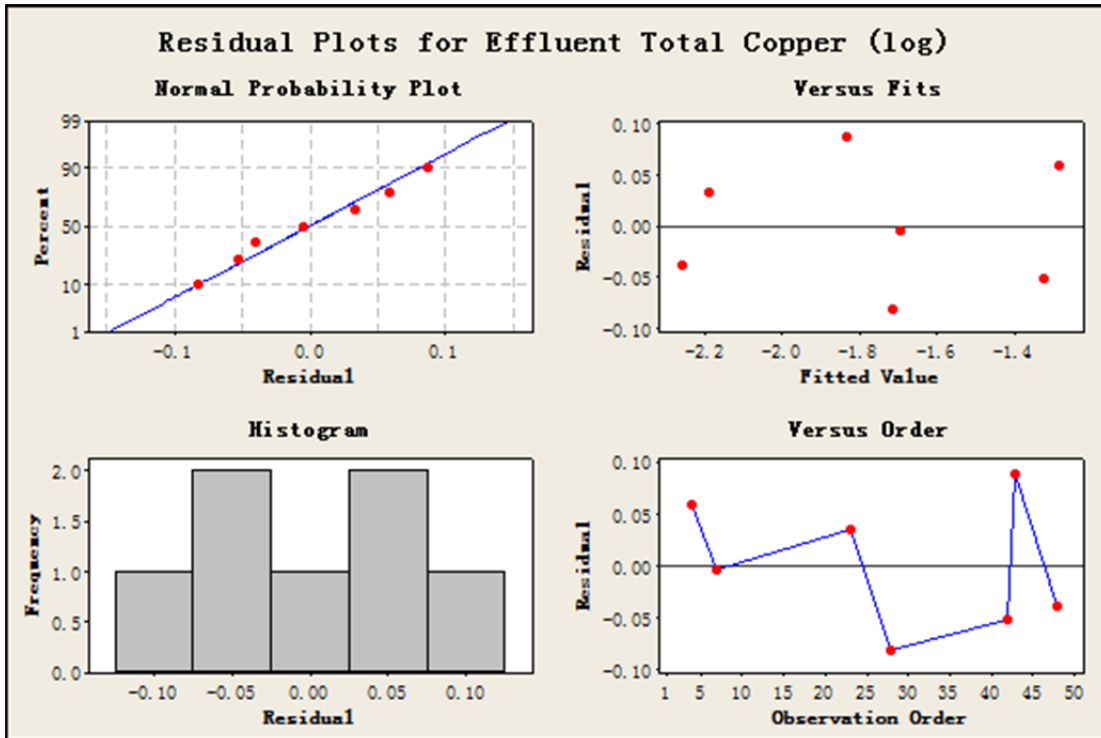

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent Total Copper	50.00	29.00	0.01	0.01	0.03
Effluent Total Copper	50.00	43.00	0.02	0.01	0.04



W = -28.000 T+ = 0.000 T- = -28.000


Z-Statistic (based on positive ranks) = -2.366

P(est.) = 0.022 P(exact) = 0.016

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = 0.016).

Appendix D.7: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Copper (50 Sampled Storms)

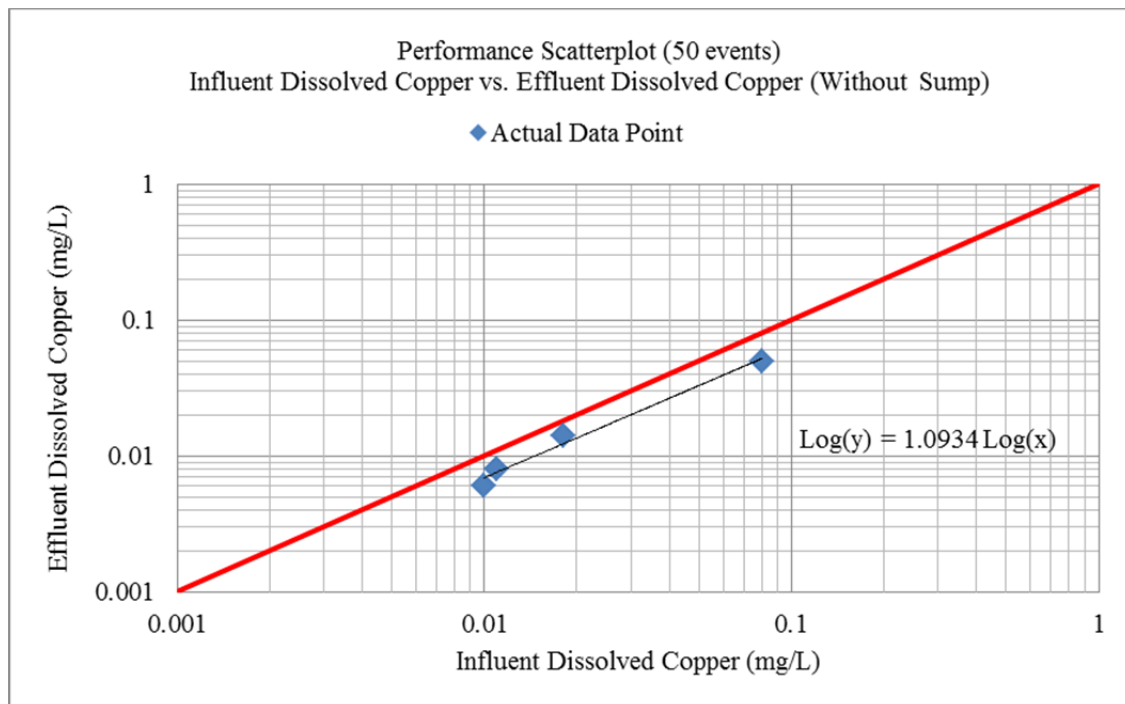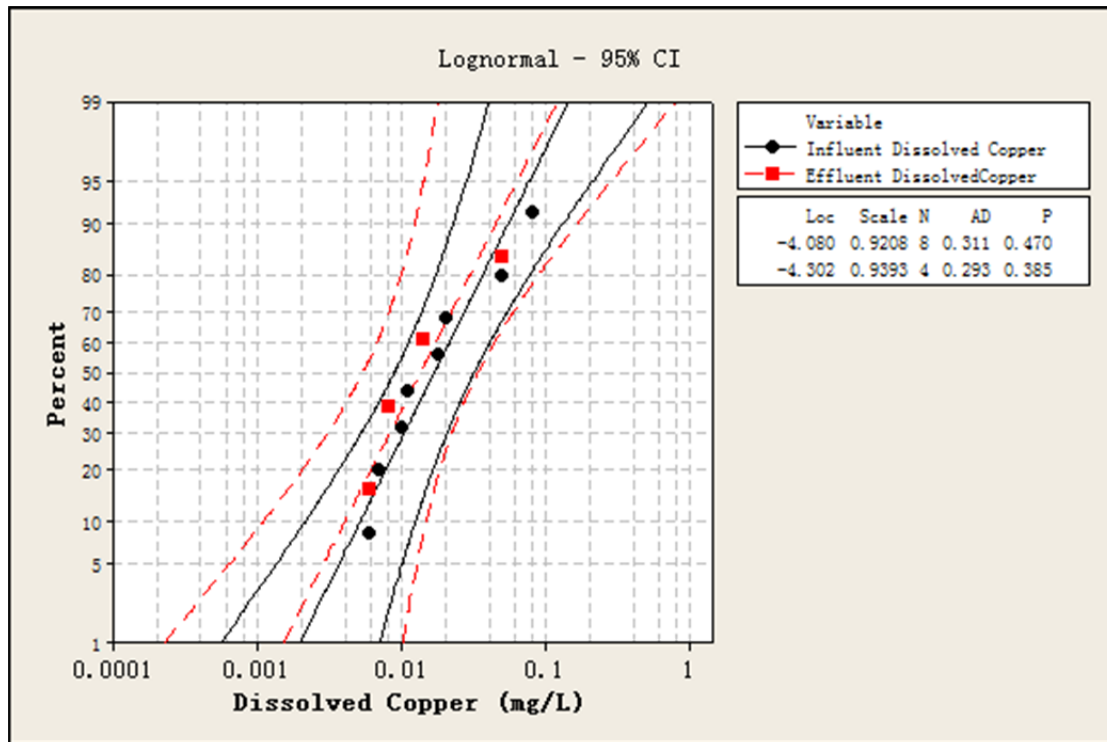

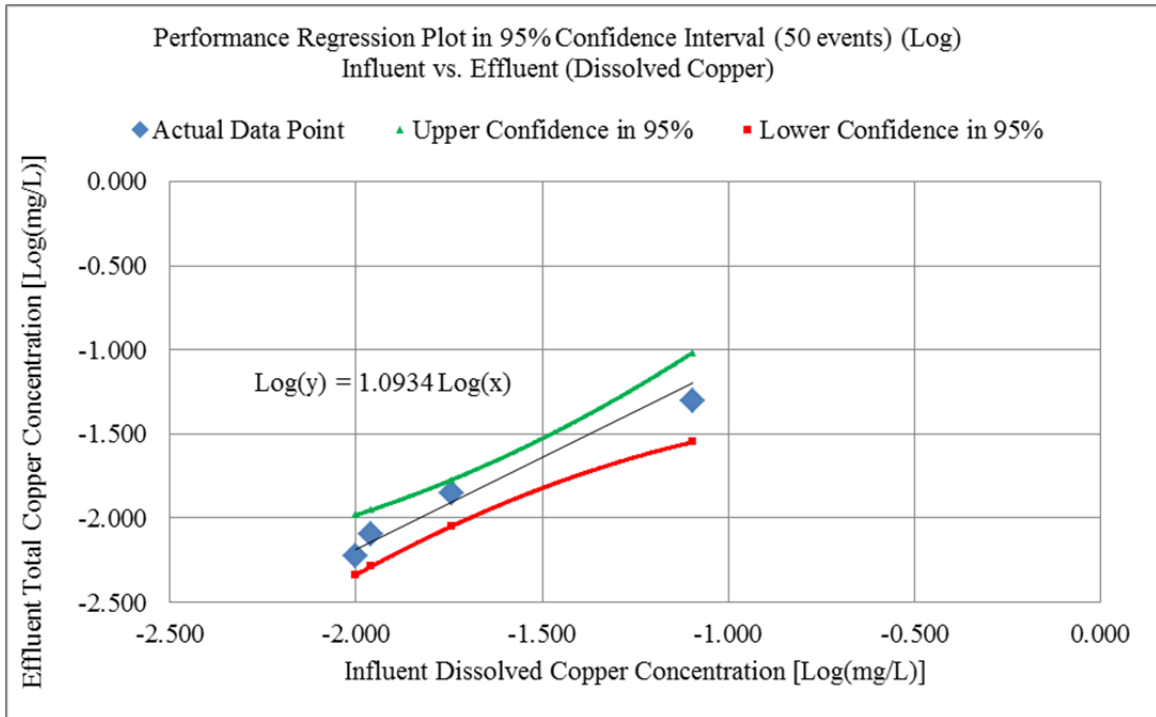


SUMMARY OUTPUT

Regression Statistics	
Multiple R	1.00
R Square	1.00
Adjusted R Square	0.67
Standard Error	0.07
Observations	4.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	14.45	14.45	2634.23	0.00
Residual	3.00	0.02	0.01		
Total	4.00	14.46			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	1.09	0.02	51.32	0.00	1.03	1.16	1.03	1.16

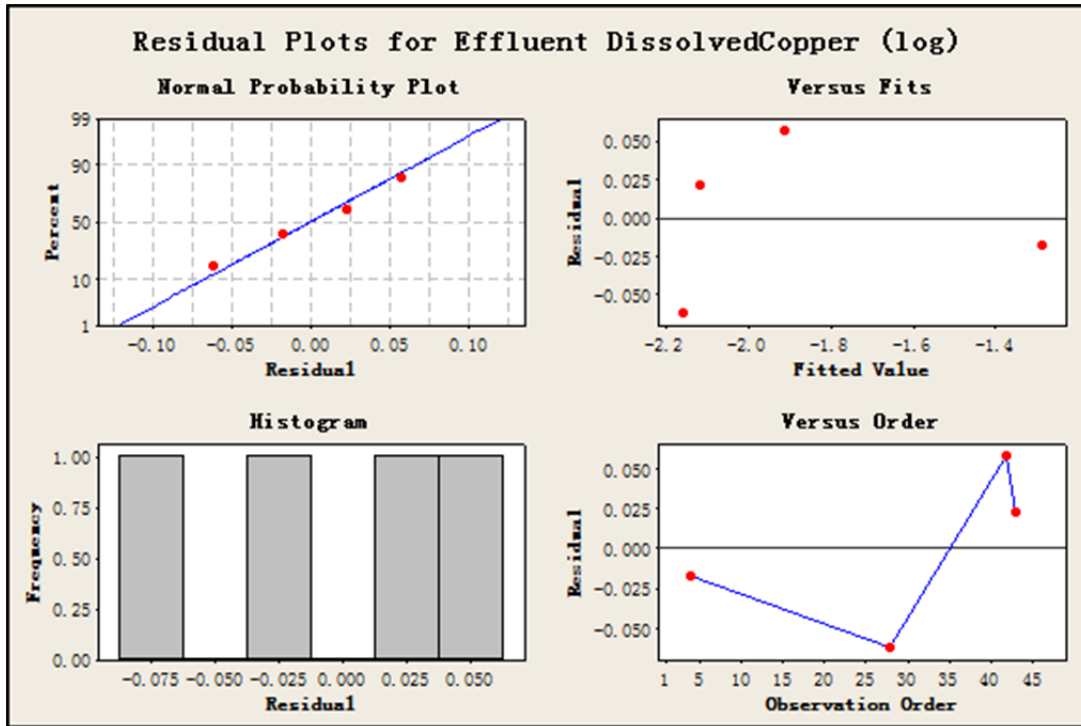

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent Dissolved Copper	48.00	40.00	0.01	0.01	0.04
Effluent Dissolved Copper	48.00	44.00	0.01	0.01	0.04



W = -10.000 T+ = 0.000 T- = -10.000


Z-Statistic (based on positive ranks) = -1.826

P(est.) = 0.100 P(exact) = 0.125

The change that occurred with the treatment is not great enough to exclude the possibility that it is due to chance (P = 0.125).

Appendix D.8: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Total Zinc (50 Sampled Storms)

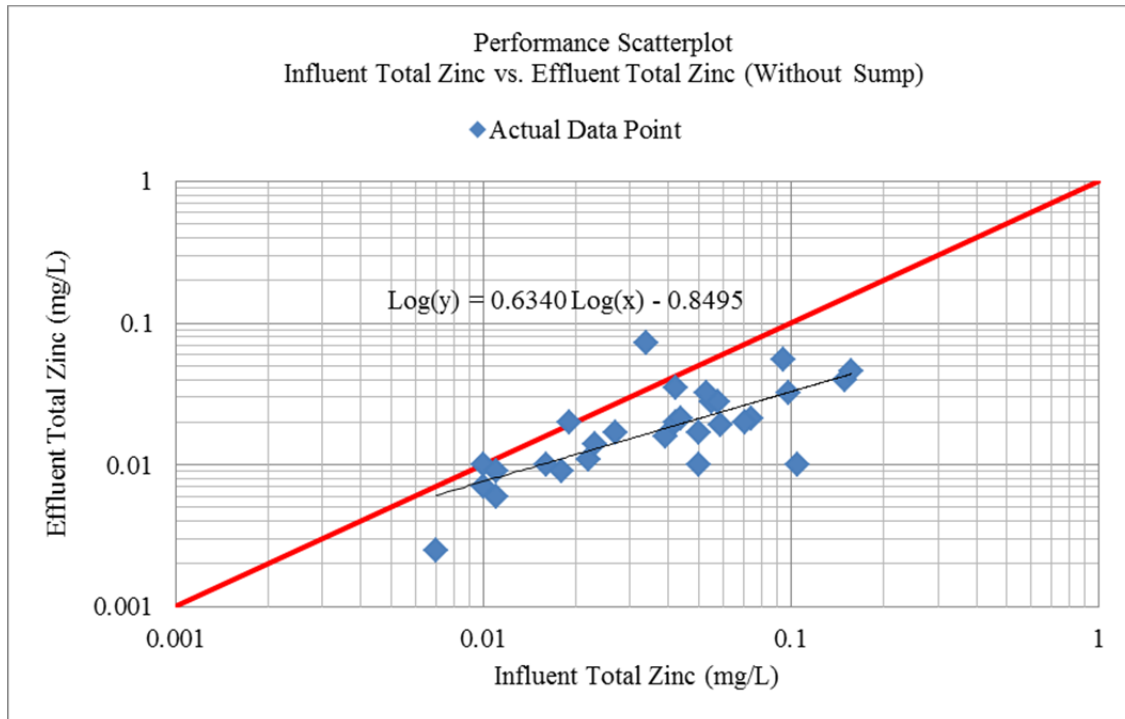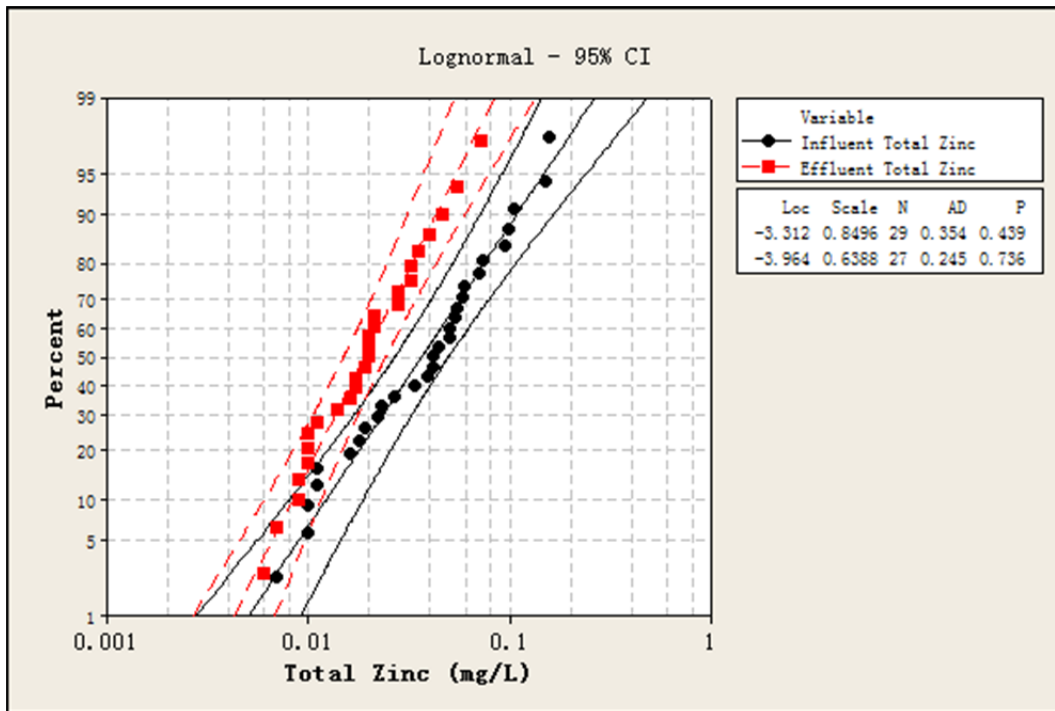

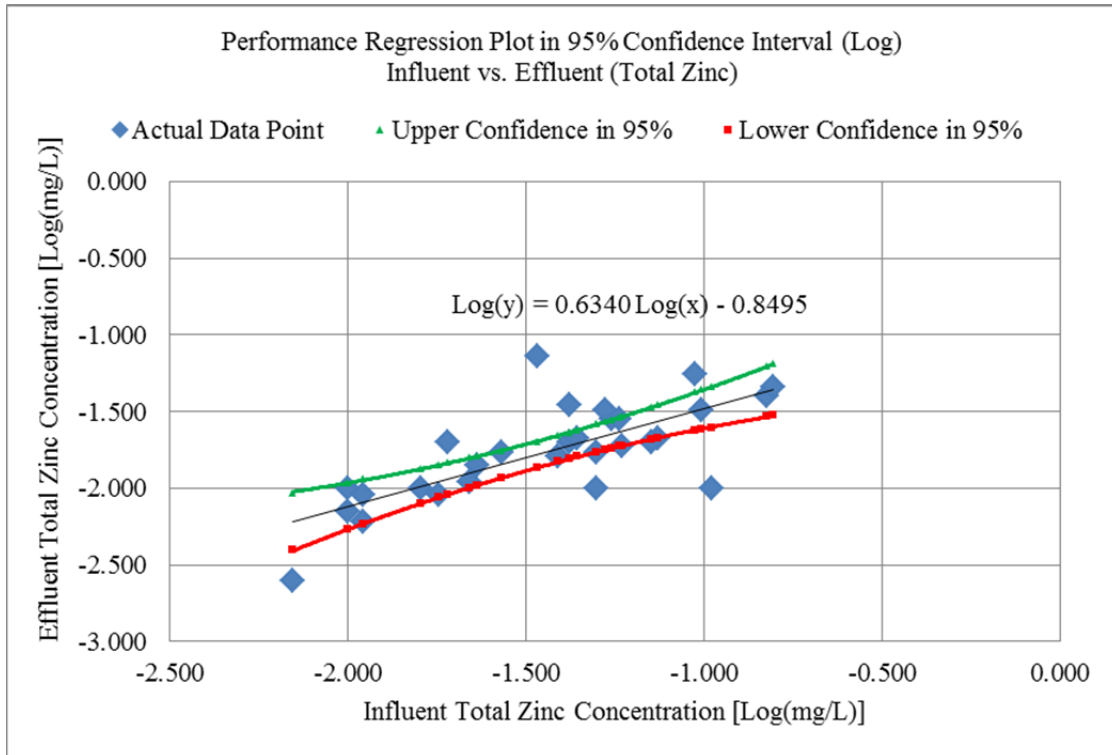


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.74
R Square	0.55
Adjusted R Square	0.53
Standard Error	0.22
Observations	29.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	1.53	1.53	32.43	0.00
Residual	27.00	1.28	0.05		
Total	28.00	2.81			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.8495	0.17	-5.14	0.00	-1.19	-0.51	-1.19	-0.51
X Variable 1	0.6340	0.11	5.69	0.00	0.41	0.86	0.41	0.86

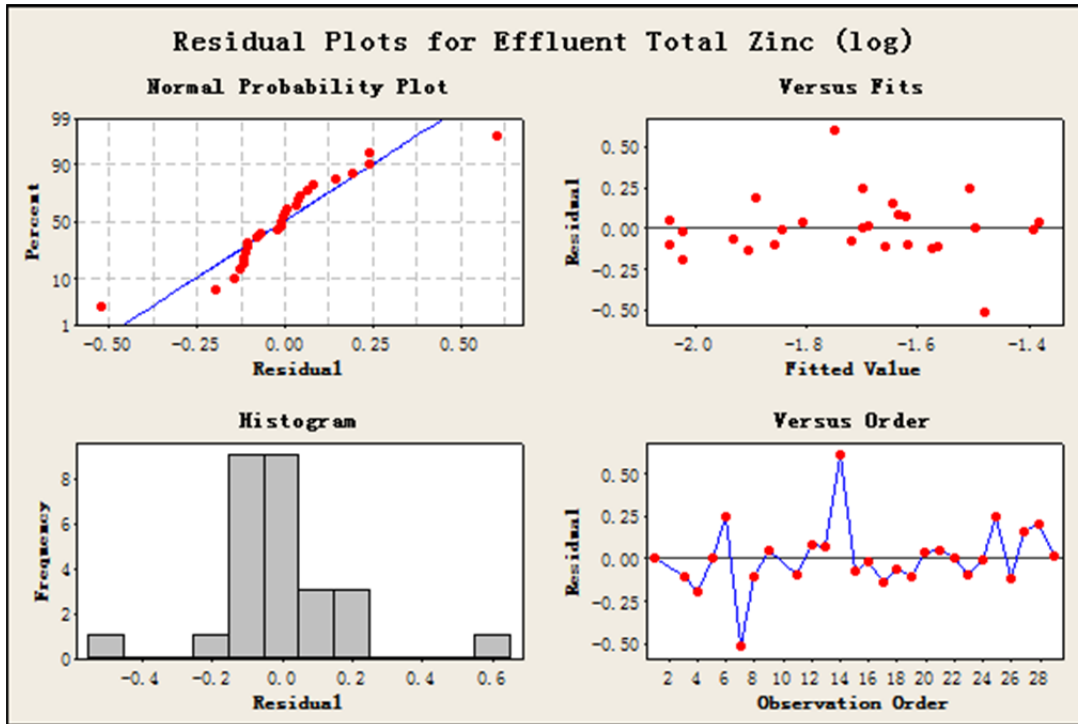

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent Total Zinc	30.00	0.00	0.04	0.02	0.07
Effluent Total Zinc	30.00	2.00	0.02	0.01	0.03



W= -340.000 T+ = 19.000 T- = -359.000


Z-Statistic (based on positive ranks) = -4.084

(P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix D.9: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Dissolved Zinc (50 Sampled Storms)

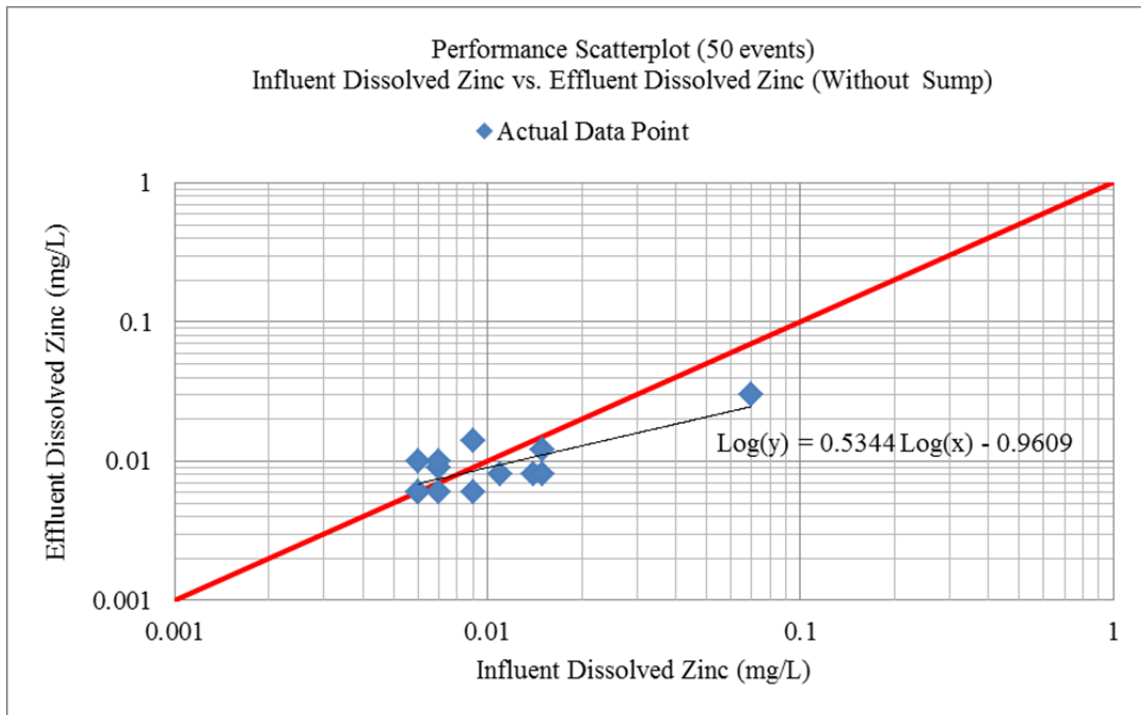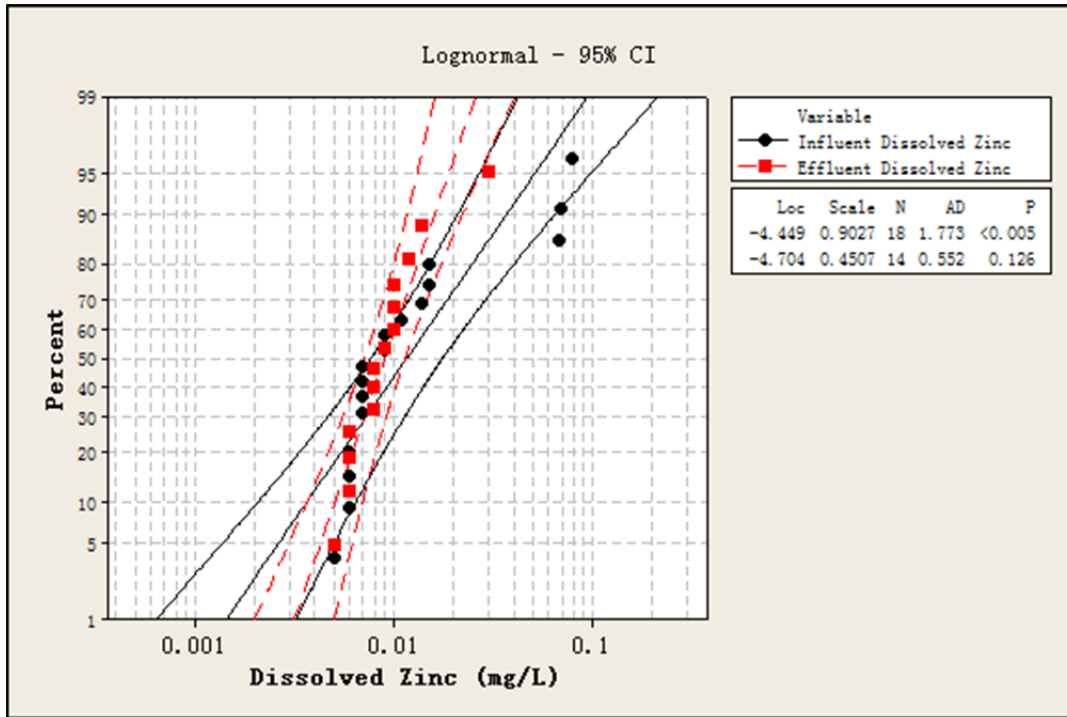

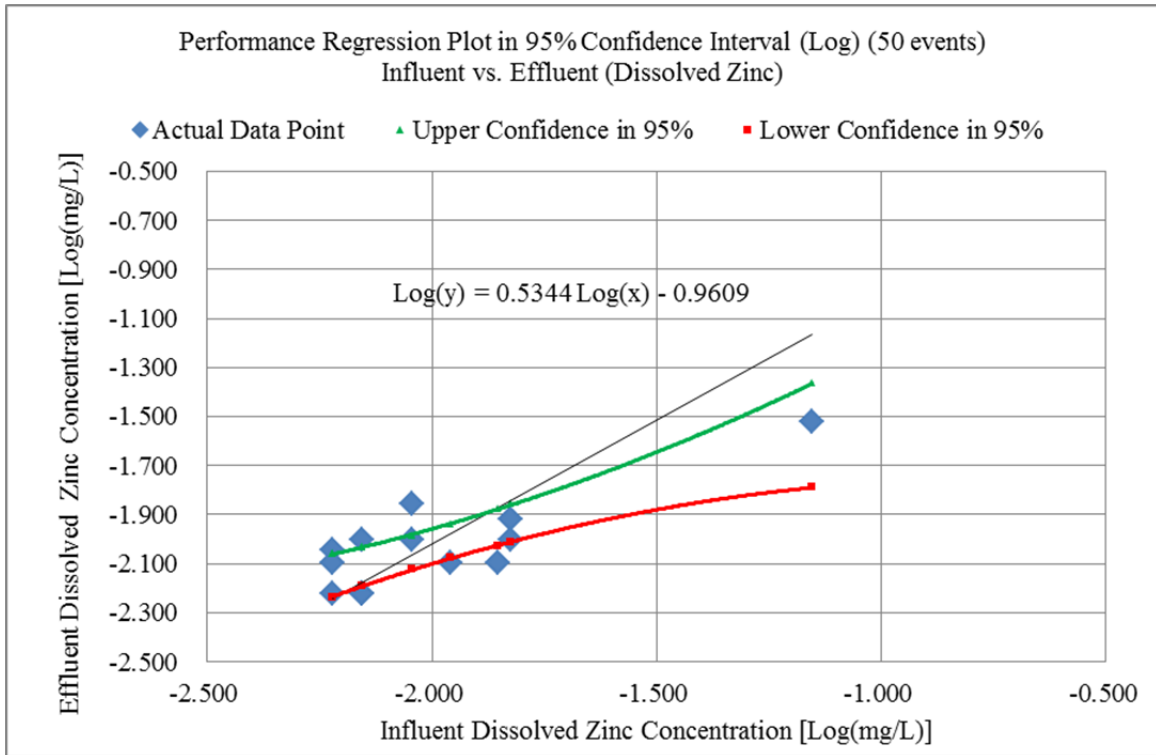


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.83
R Square	0.68
Adjusted R Square	0.66
Standard Error	0.11
Observations	13.00

<i>ANOVA</i>					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	0.29	0.29	23.82	0.00
Residual	11.00	0.13	0.01		
Total	12.00	0.43			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	-0.9609	0.22	-4.37	0.00	-1.44	-0.48	-1.44	-0.48
X Variable 1	0.5344	0.11	4.88	0.00	0.29	0.78	0.29	0.78

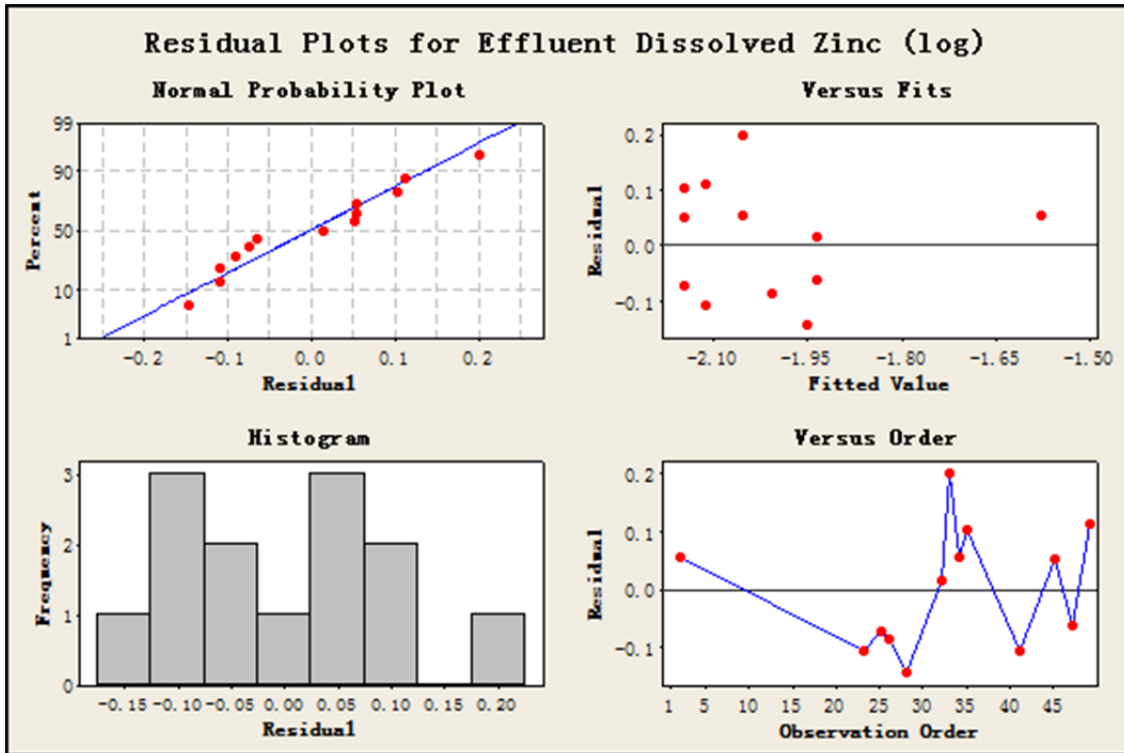

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent Dissolved Zinc	50.00	31.00	0.01	0.01	0.02
Effluent Dissolved Zinc	50.00	35.00	0.01	0.01	0.01



W = -29.000 T+ = 31.000 T- = -60.000


Z-Statistic (based on positive ranks) = -1.015

P(est.) = 0.327 P(exact) = 0.340

The change that occurred with the treatment is not great enough to exclude the possibility that it is due to chance (P = 0.340).

Appendix D.10: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for *E. Coli* (50 Sampled Storms)

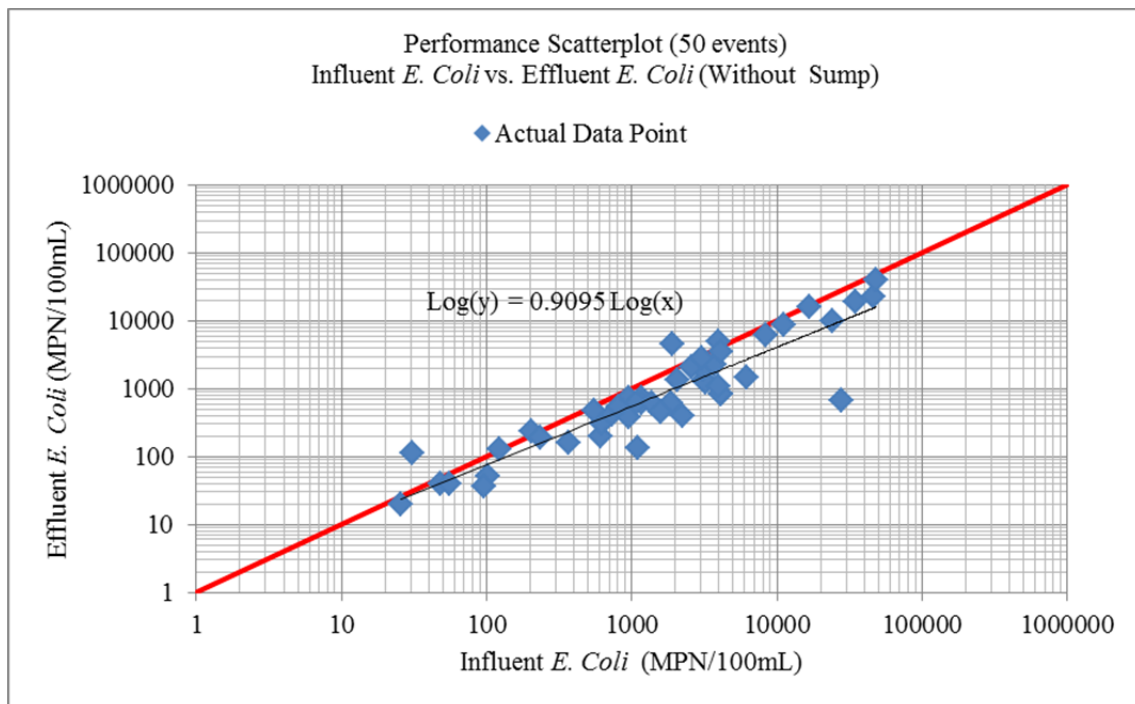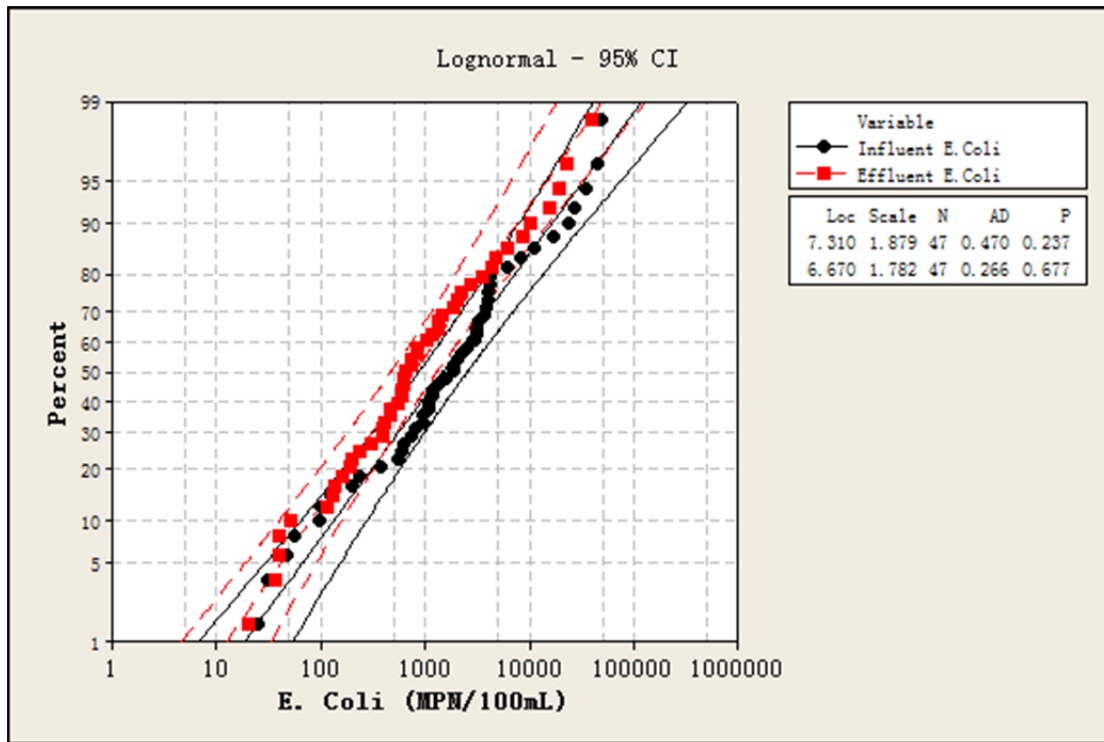

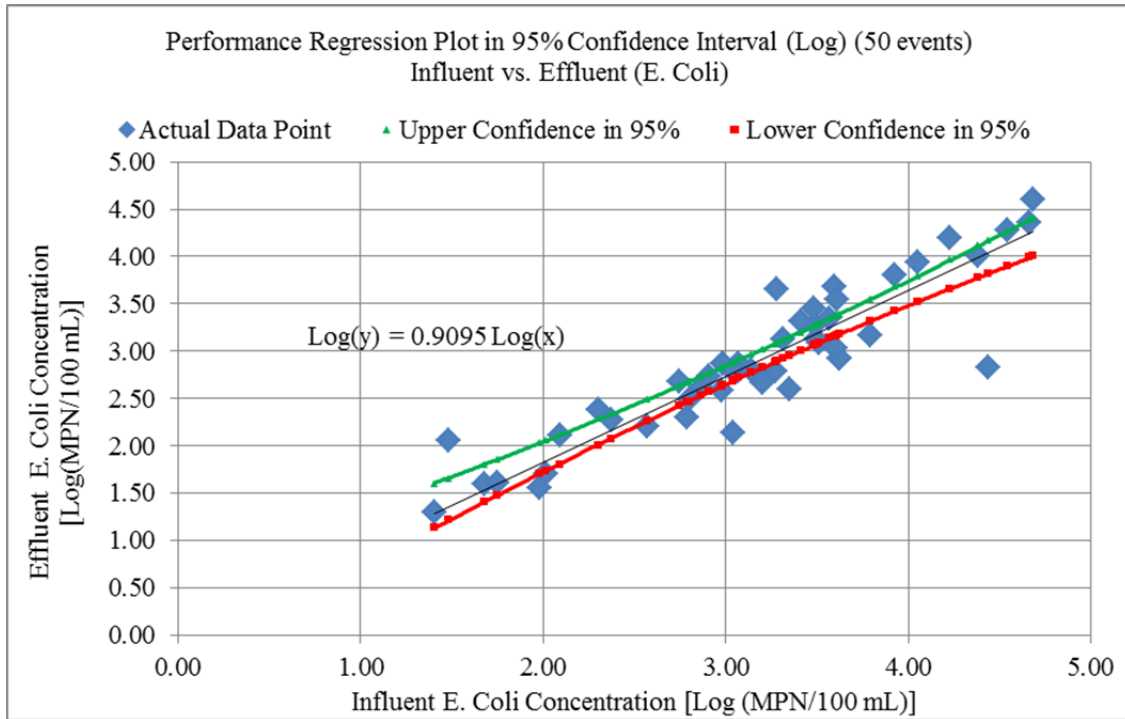


SUMMARY OUTPUT

Regression Statistics	
Multiple R	0.99
R Square	0.99
Adjusted R Square	0.97
Standard Error	0.32
Observations	47.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	417.18	417.18	4071.82	0.00
Residual	46.00	4.71	0.10		
Total	47.00	421.89			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.91	0.01	63.81	0.00	0.88	0.94	0.88	0.94

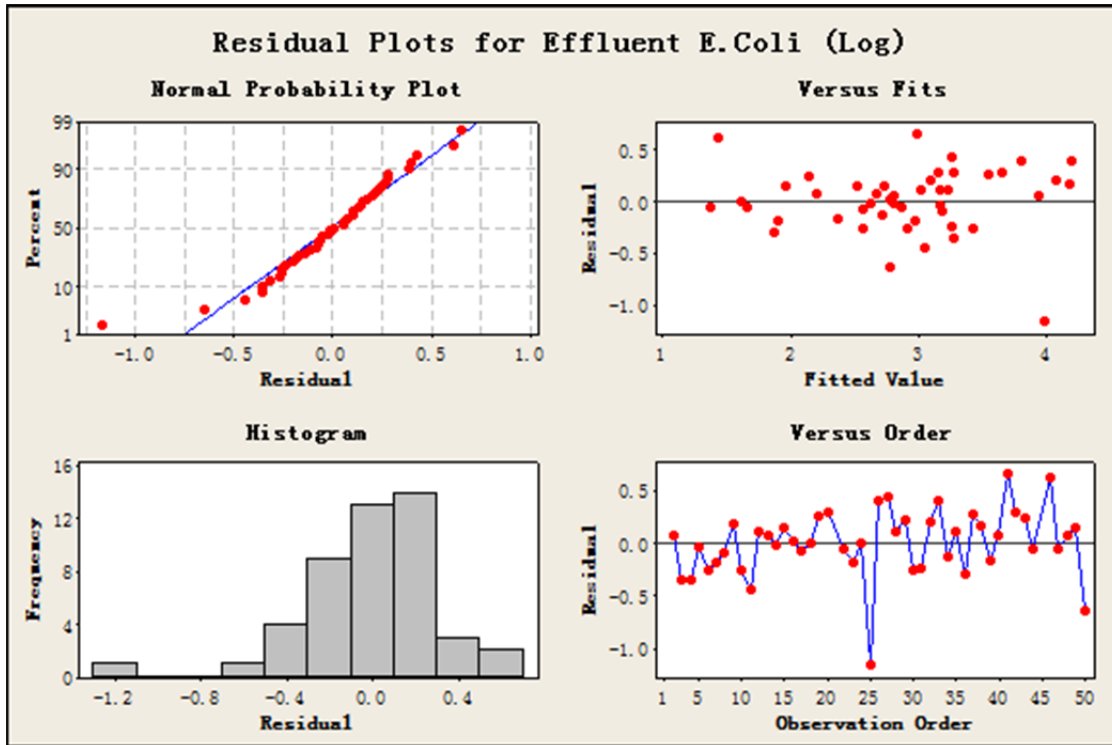

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent E.Coli	50.00	3.00	1870.00	610.00	4091.00
Effluent E.Coli	50.00	3.00	665.00	240.50	2224.00



W= -970.000 T+ = 79.000 T- = -1049.000


Z-Statistic (based on positive ranks) = -5.132

(P = <0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = <0.001).

Appendix D.11: Summary of Regression, ANOVA, Probability Analyses, and Hypothesis Test for Enterococci (50 Sampled Storms)

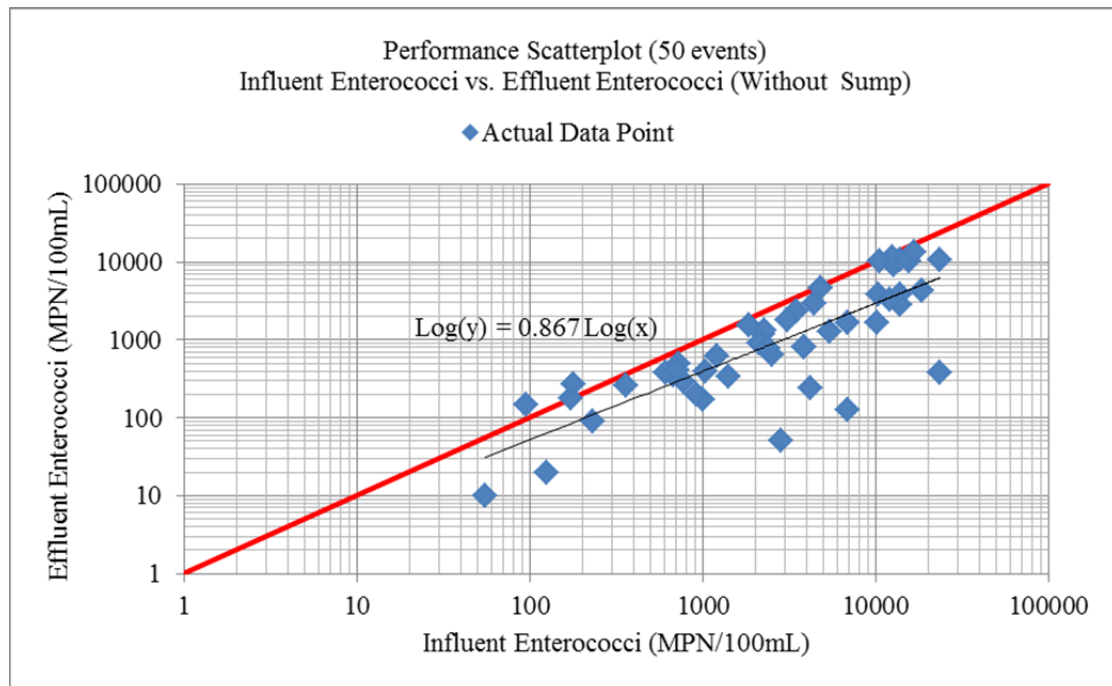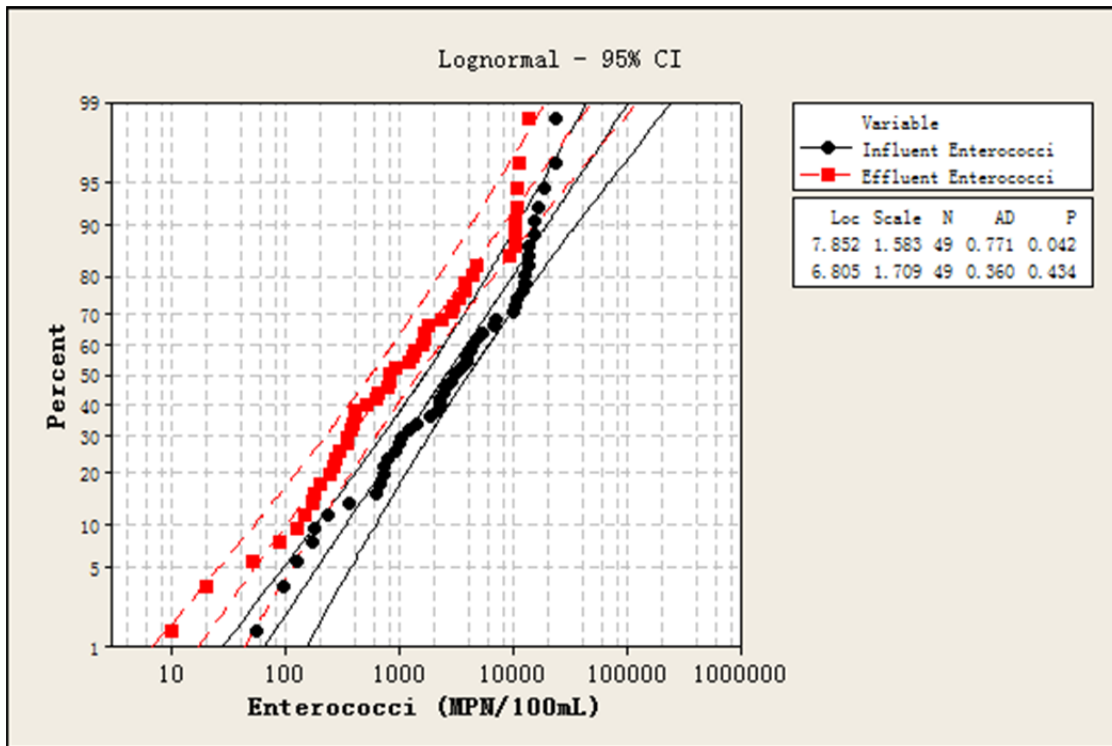

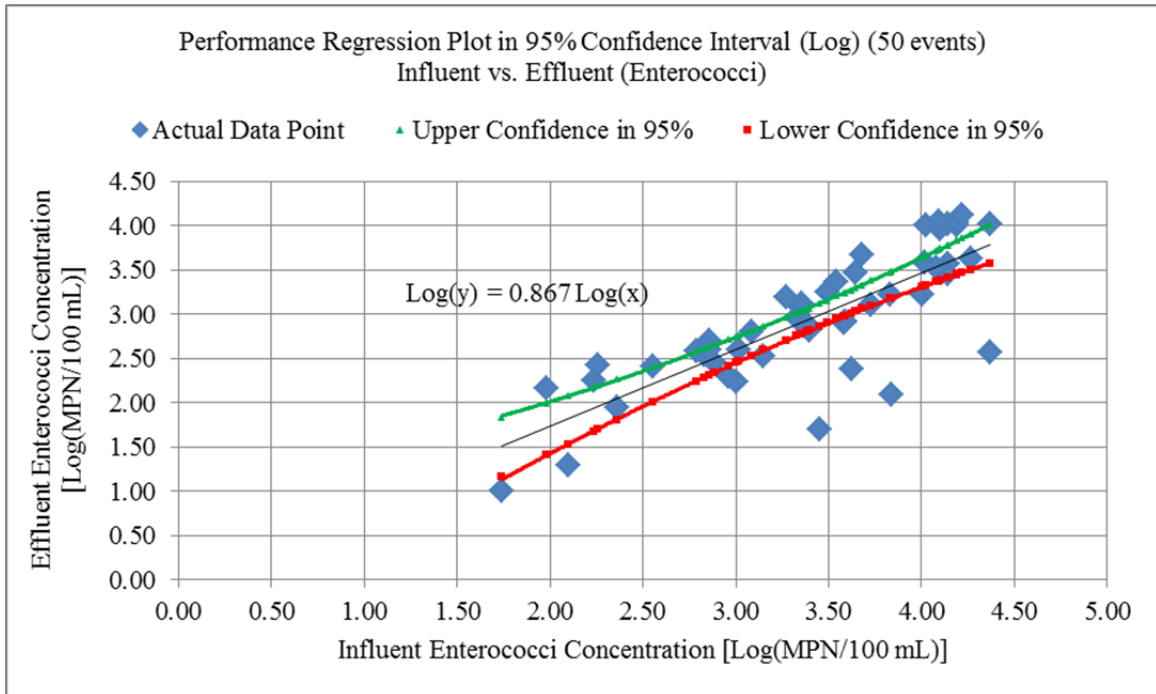


SUMMARY OUTPUT

<i>Regression Statistics</i>	
Multiple R	0.99
R Square	0.98
Adjusted R Square	0.96
Standard Error	0.43
Observations	49.00

ANOVA					
	<i>df</i>	<i>SS</i>	<i>MS</i>	<i>F</i>	<i>Significance F</i>
Regression	1.00	445.34	445.34	2363.73	0.00
Residual	48.00	9.04	0.19		
Total	49.00	454.38			

	<i>Coefficients</i>	<i>Standard Error</i>	<i>t Stat</i>	<i>P-value</i>	<i>Lower 95%</i>	<i>Upper 95%</i>	<i>Lower 95.0%</i>	<i>Upper 95.0%</i>
Intercept	0.00	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
X Variable 1	0.87	0.02	48.62	0.00	0.83	0.90	0.83	0.90

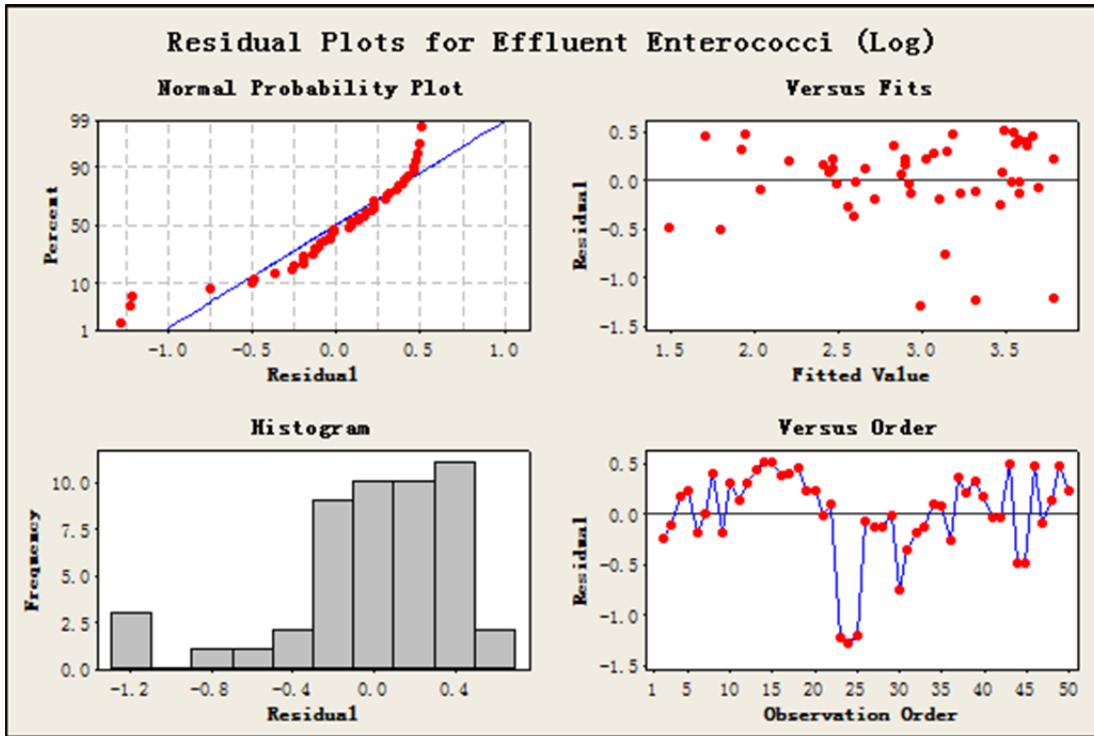

Wilcoxon Signed Rank Test

Normality Test (Shapiro-Wilk) Failed (P < 0.050)

Group	N	Missing	Median	0.25	0.75
Influent Enterococci	50.00	1.00	3110.00	844.75	11339.00
Effluent Enterococci	50.00	1.00	820.00	278.75	3552.50

W = -1209.000 T+ = 8.000 T- = -1217.000

Z-Statistic (based on positive ranks) = -6.013

(P = < 0.001)

The change that occurred with the treatment is greater than would be expected by chance; there is a statistically significant difference (P = < 0.001).